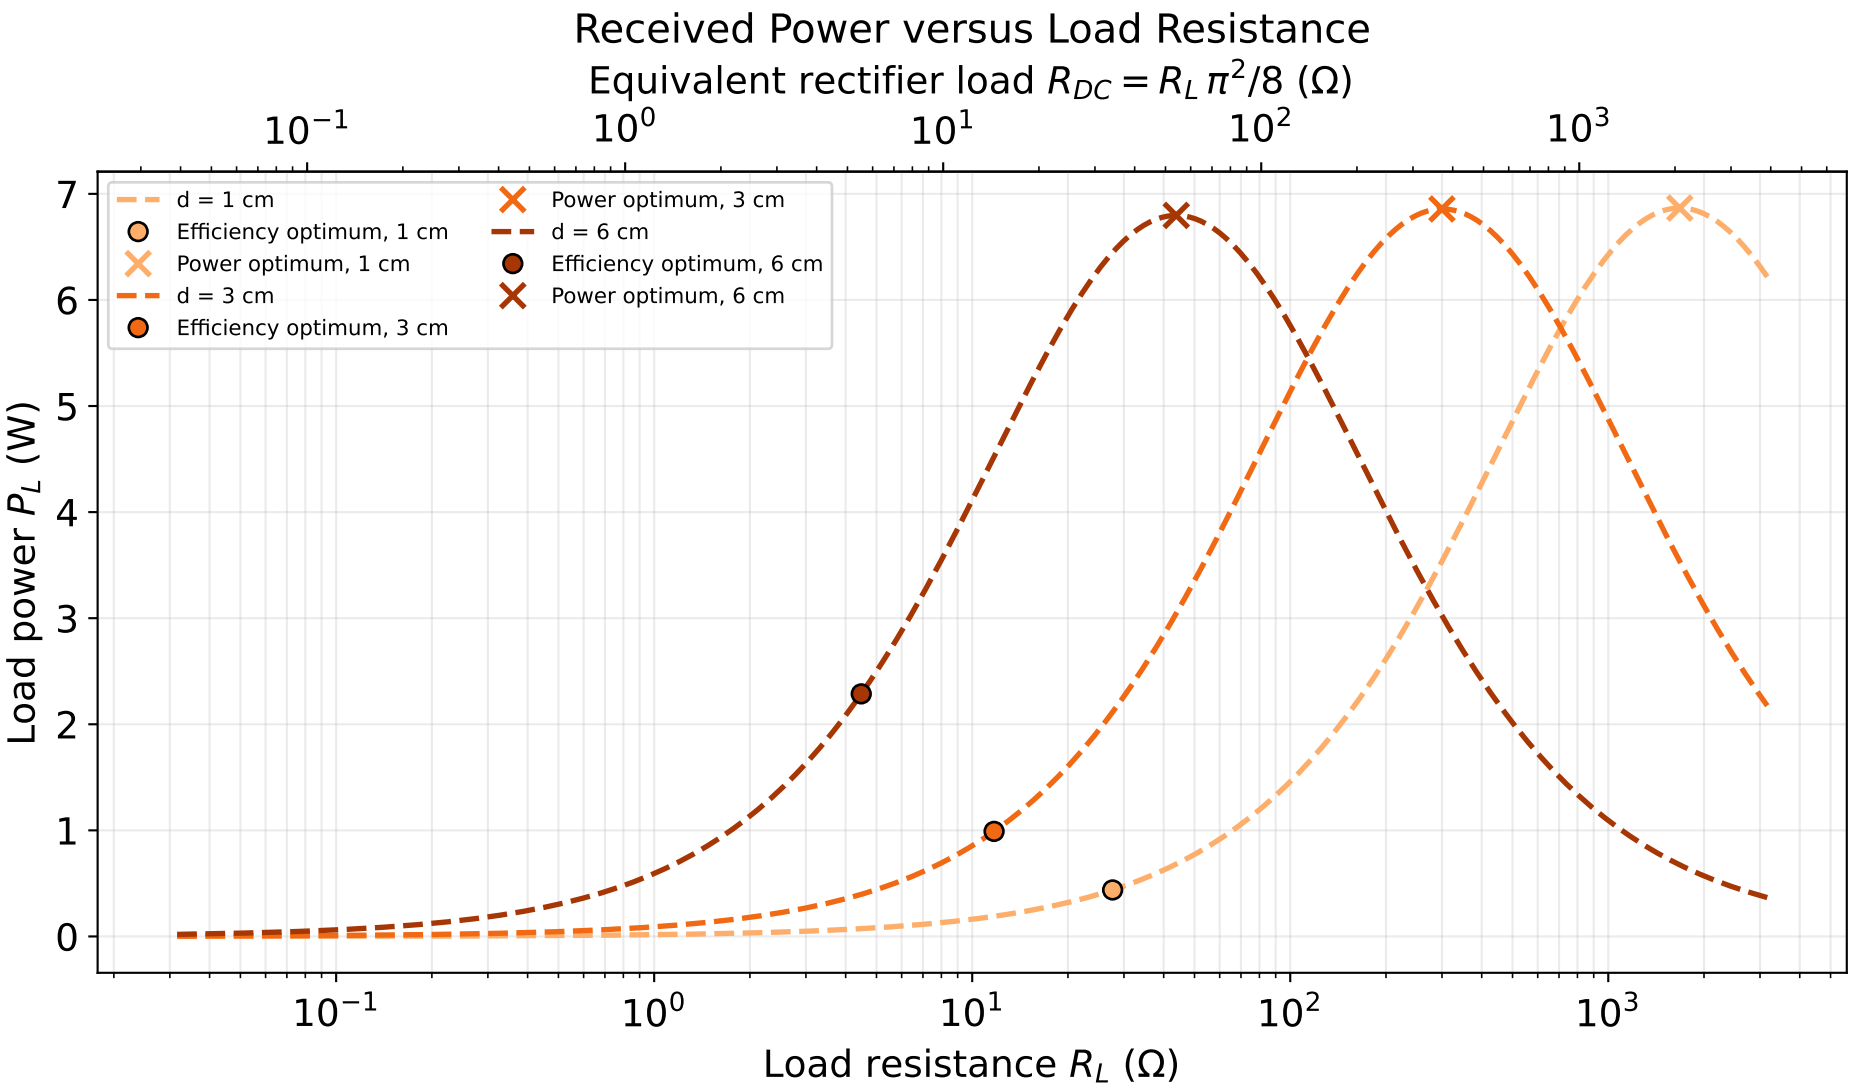
Received Power versus Load Resistance
Equivalent rectifier load $R_{DC} = R_L \pi^2/8$ (Ω)
10^{-1}
10^{0}
10^{1}
10^{2}
10^{3}
d = 1 cm
Efficiency optimum, 1 cm
Power optimum, 1 cm
d = 3 cm
Efficiency optimum, 3 cm
Power optimum, 3 cm
d = 6 cm
Efficiency optimum, 6 cm
Power optimum, 6 cm
Load power P_L (W)
0
1
2
3
4
5
6
7
Load resistance R_L (Ω)