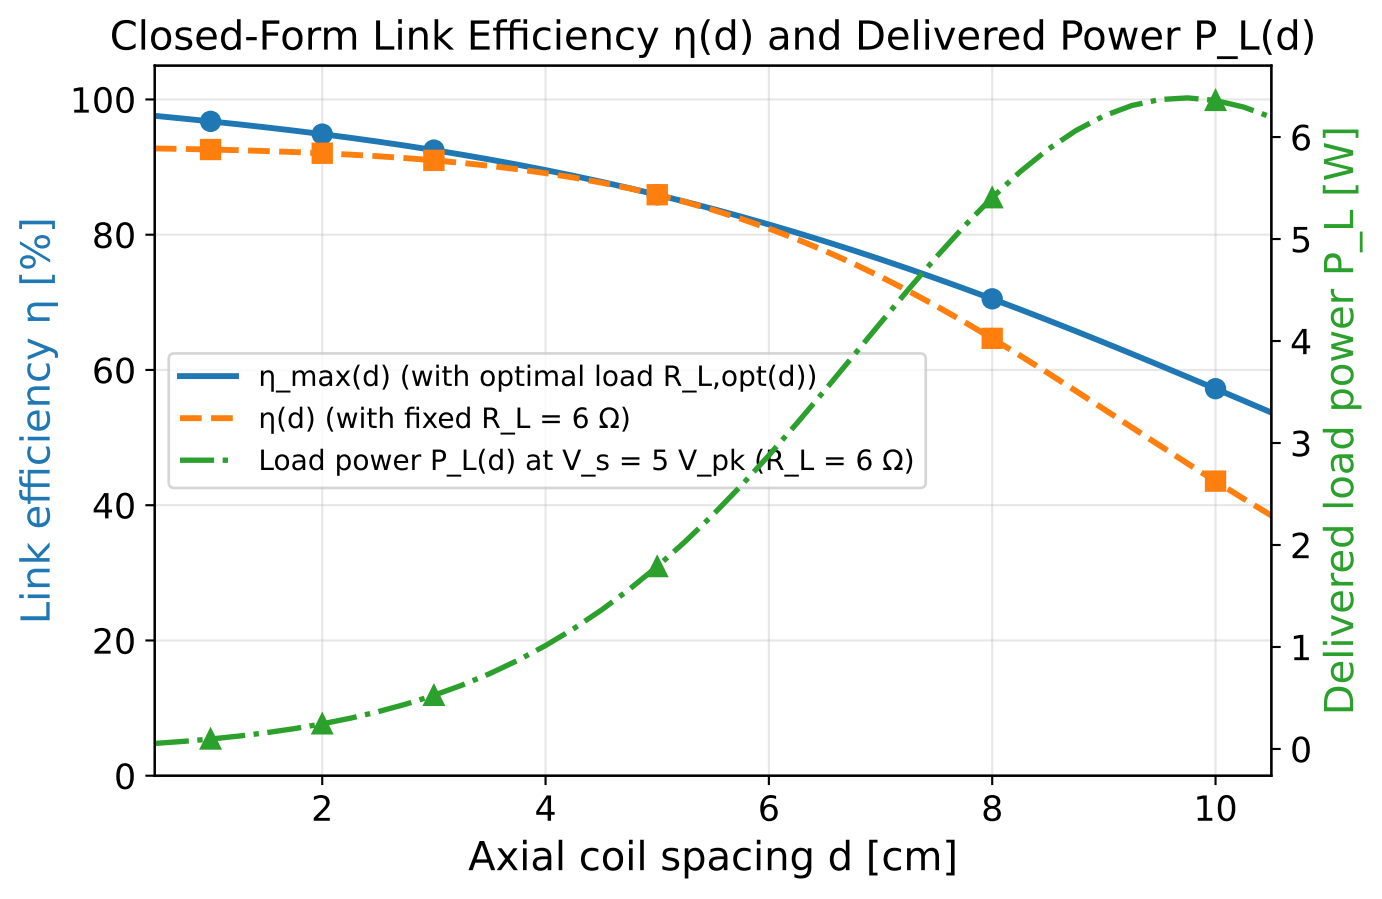
Closed-Form Link Efficiency η(d) and Delivered Power P_L(d)
Link efficiency η [%]
Delivered load power P_L [W]
Axial coil spacing d [cm]
η_max(d) (with optimal load R_L,opt(d))
η(d) (with fixed R_L = 6 Ω)
Load power P_L(d) at V_s = 5 V_pk (R_L = 6 Ω)
0
20
40
60
80
100
0
1
2
3
4
5
6
2
4
6
8
10