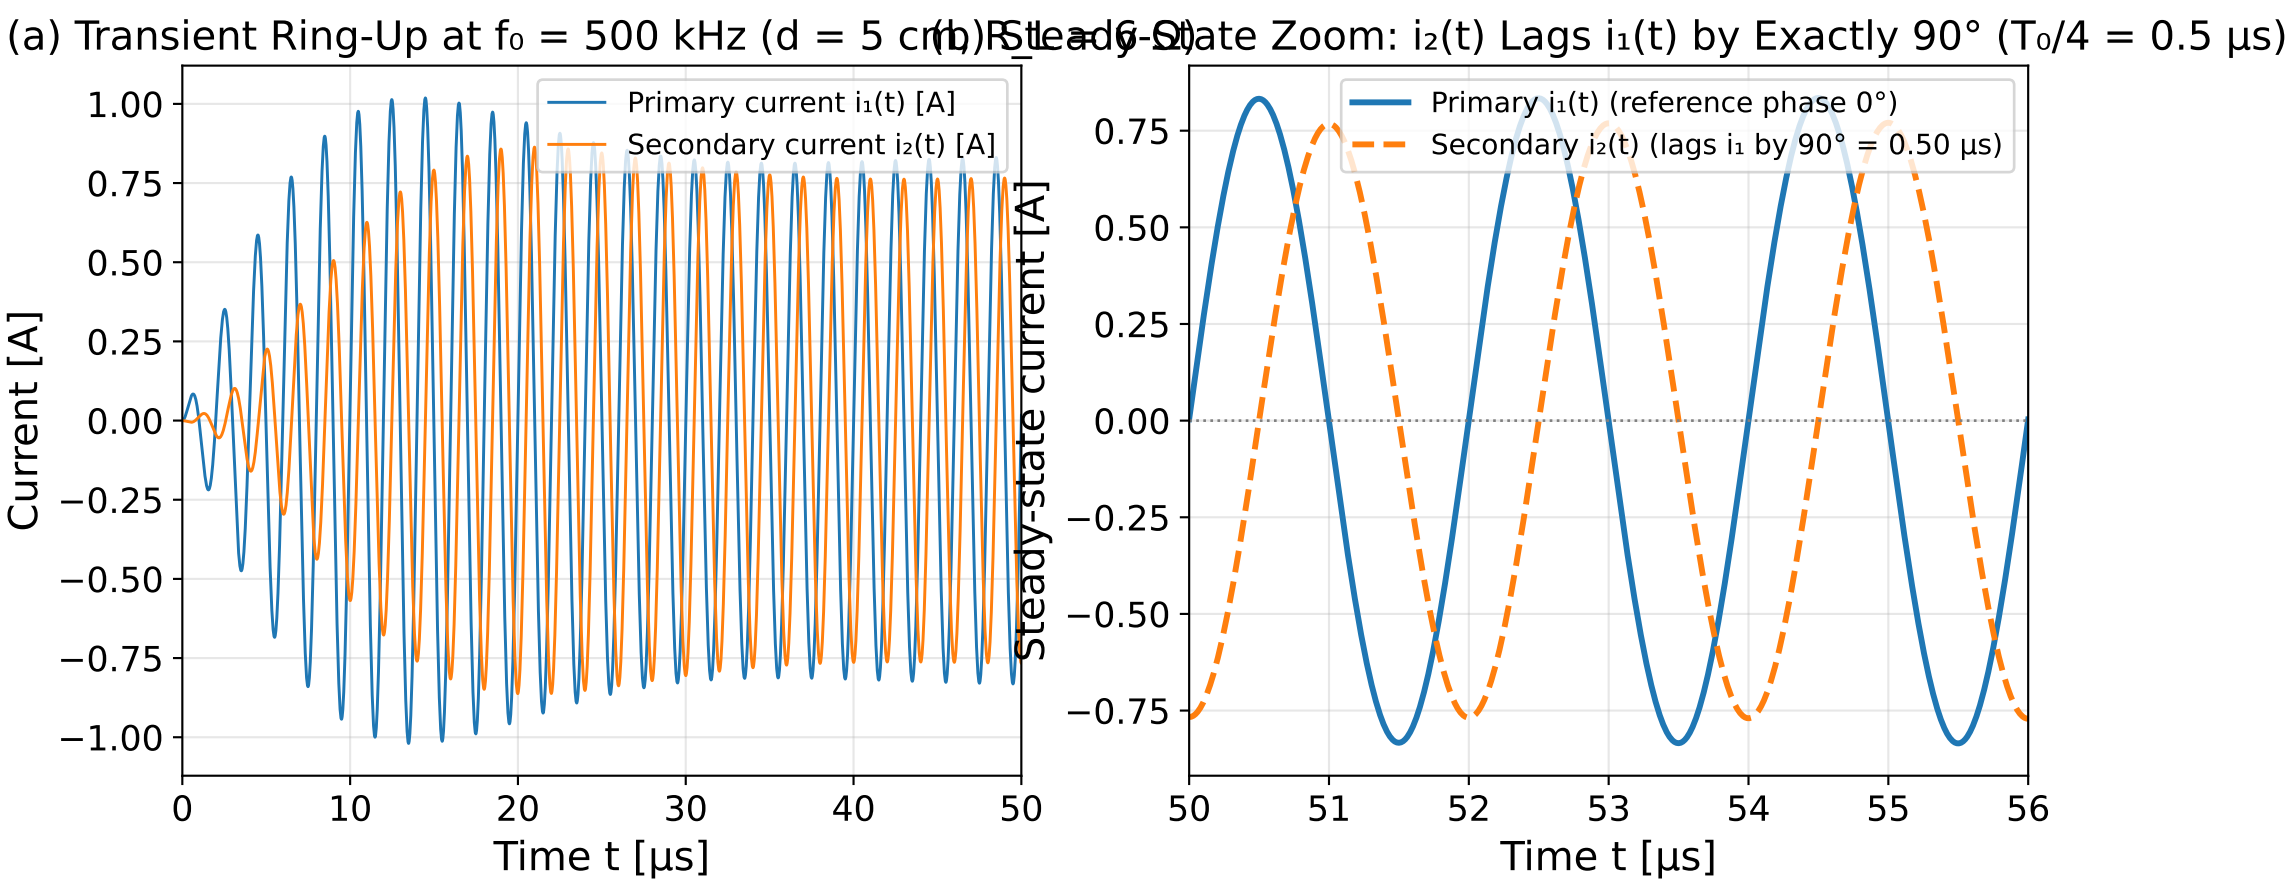
(a) Transient Ring-Up at f₀ = 500 kHz (d = 5 cm, R_L = 6 Ω)
(b) Steady-State Zoom: i₂(t) Lags i₁(t) by Exactly 90° (T₀/4 = 0.5 µs)
Primary current i₁(t) [A]
Secondary current i₂(t) [A]
Current [A]
Time t [µs]
Primary i₁(t) (reference phase 0°)
Secondary i₂(t) (lags i₁ by 90° = 0.50 µs)
Steady-state current [A]
Time t [µs]