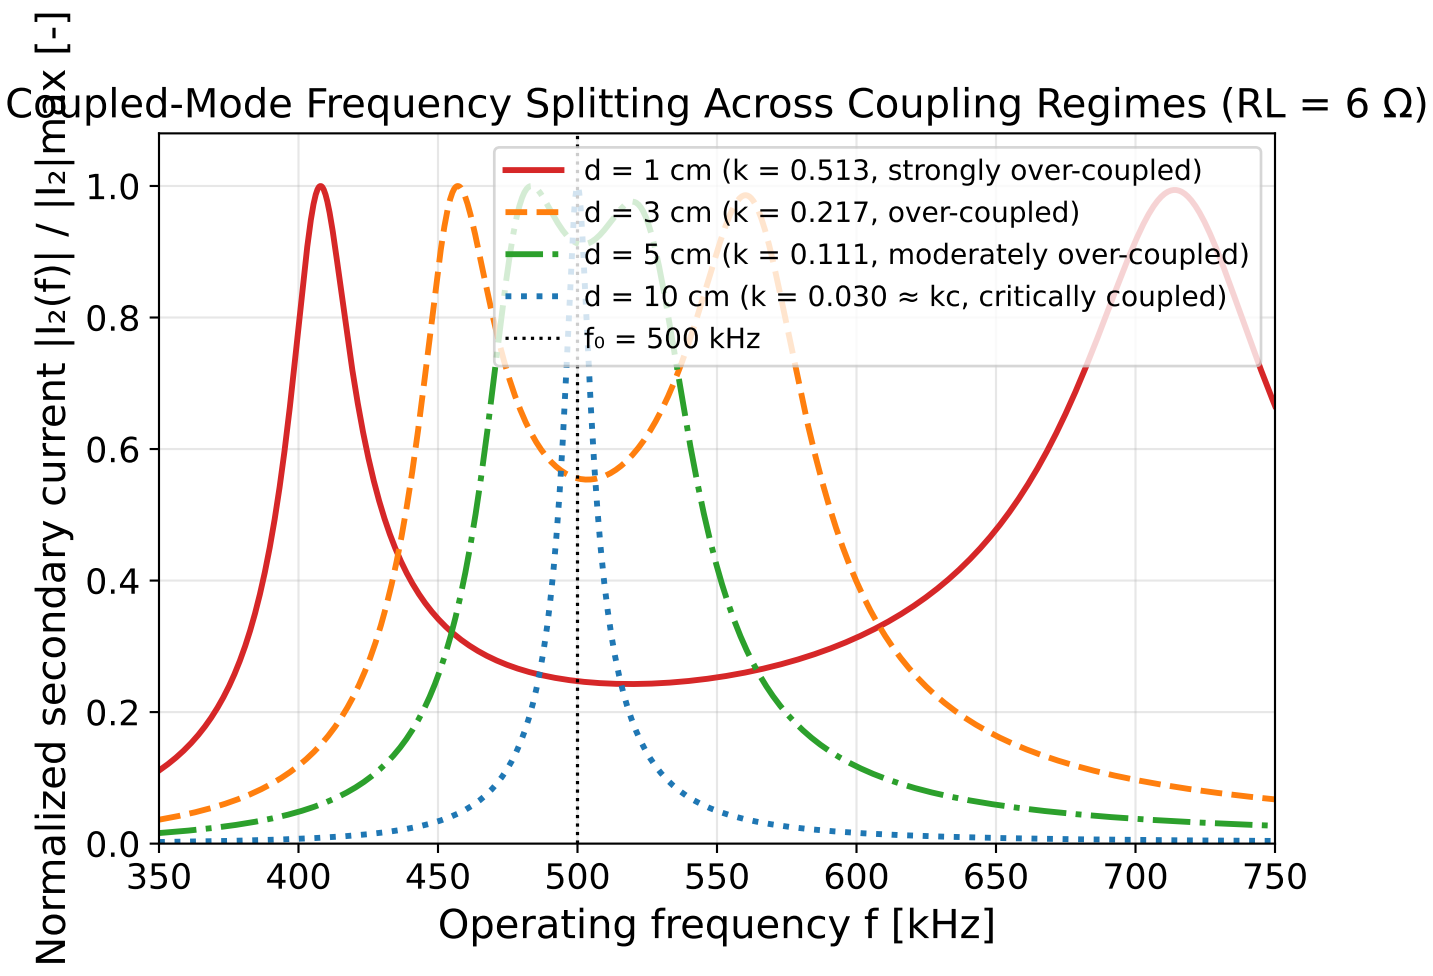
Coupled-Mode Frequency Splitting Across Coupling Regimes (RL = 6 Ω)
Normalized secondary current |I₂(f)| / |I₂|max [-]
Operating frequency f [kHz]
d = 1 cm (k = 0.513, strongly over-coupled)
d = 3 cm (k = 0.217, over-coupled)
d = 5 cm (k = 0.111, moderately over-coupled)
d = 10 cm (k = 0.030 ≈ kc, critically coupled)
f₀ = 500 kHz
0.0
0.2
0.4
0.6
0.8
1.0
350
400
450
500
550
600
650
700
750