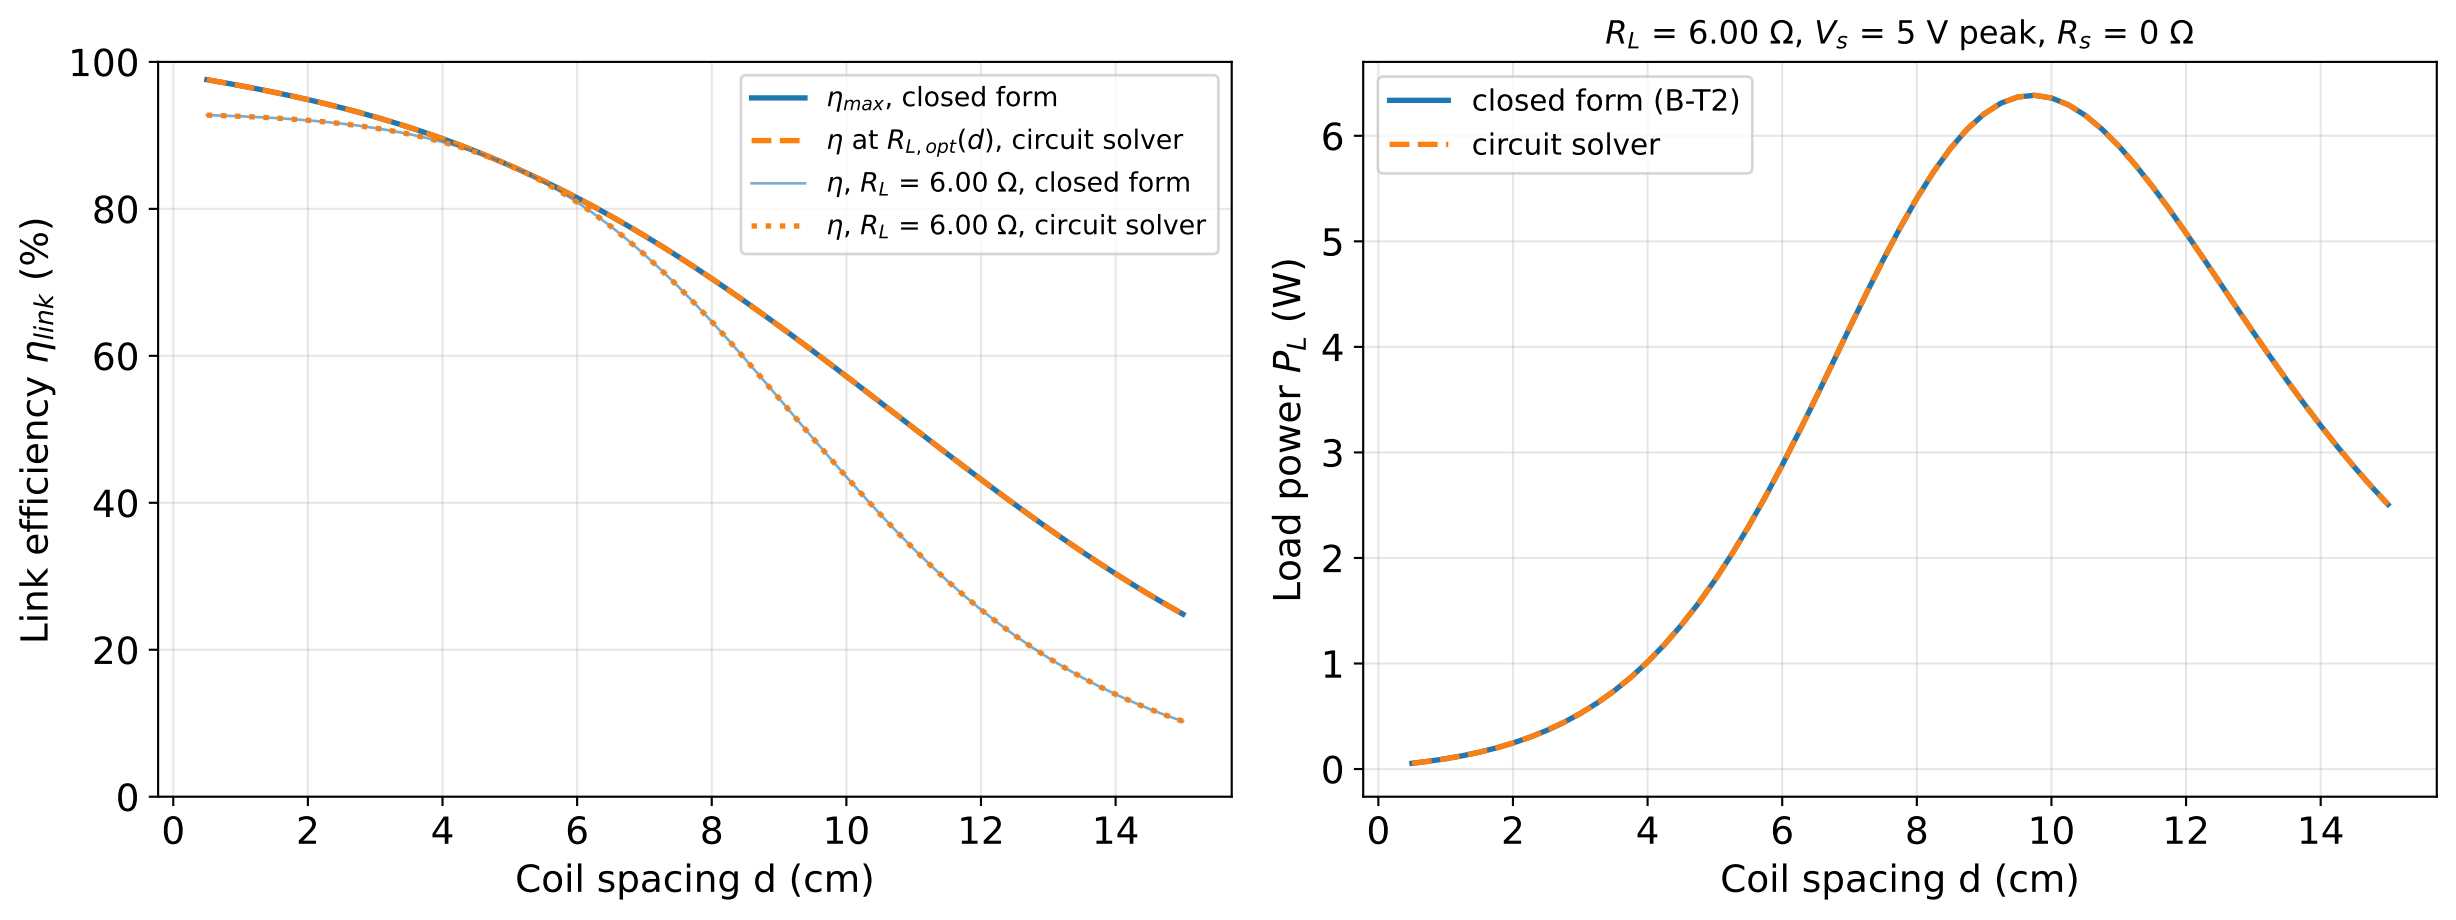
η_{max}, closed form
η at $R_{L,opt}(d)$, circuit solver
η, R_L = 6.00 Ω, closed form
η, R_L = 6.00 Ω, circuit solver
Link efficiency η_{link} (%)
Coil spacing d (cm)
R_L = 6.00 Ω, V_s = 5 V peak, R_s = 0 Ω
closed form (B-T2)
circuit solver
Load power P_L (W)
Coil spacing d (cm)