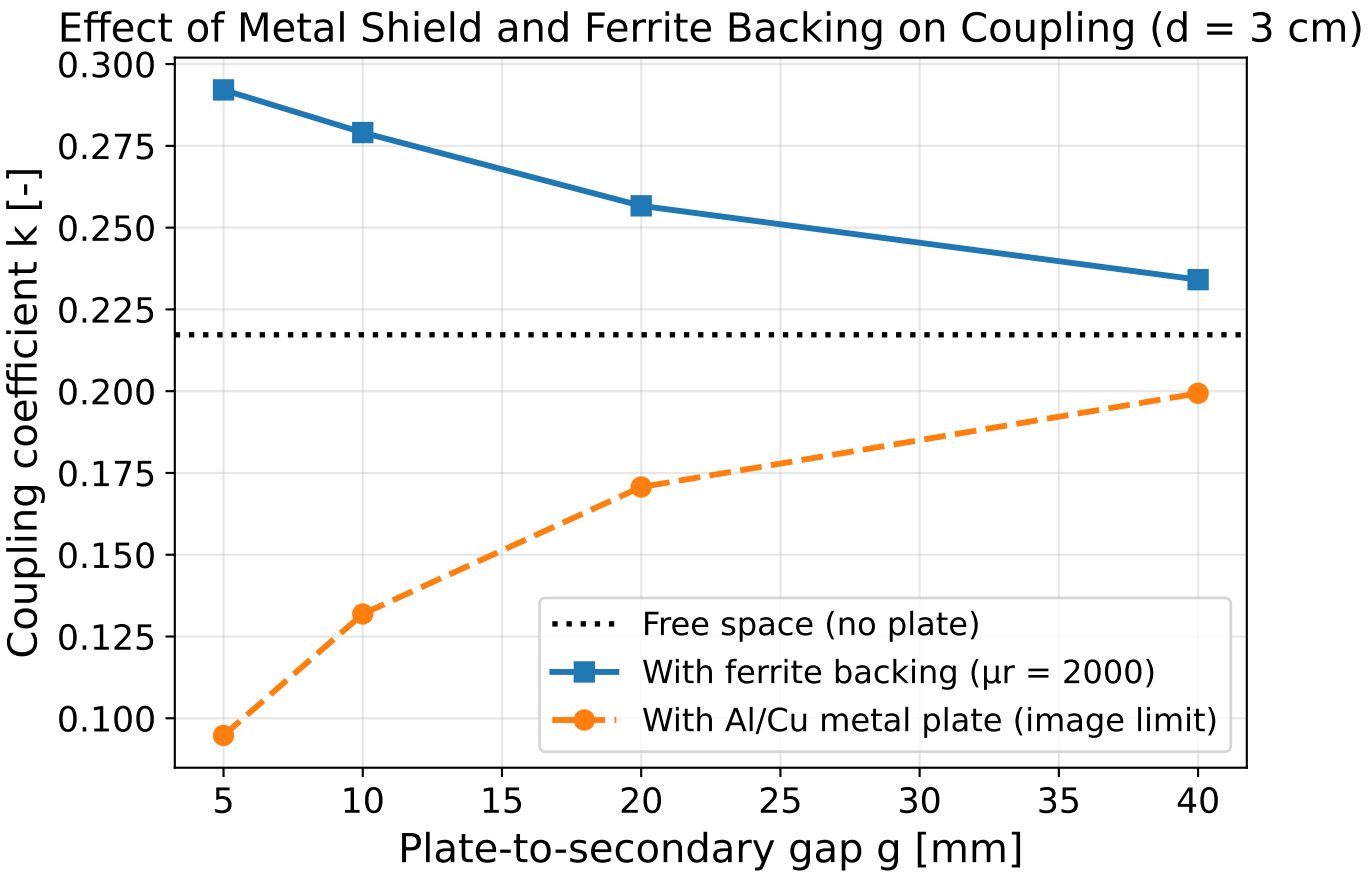
Effect of Metal Shield and Ferrite Backing on Coupling (d = 3 cm)
Coupling coefficient k [-]
0.300
0.275
0.250
0.225
0.200
0.175
0.150
0.125
0.100
5
10
15
20
25
30
35
40
Plate-to-secondary gap g [mm]
Free space (no plate)
With ferrite backing (μr = 2000)
With Al/Cu metal plate (image limit)