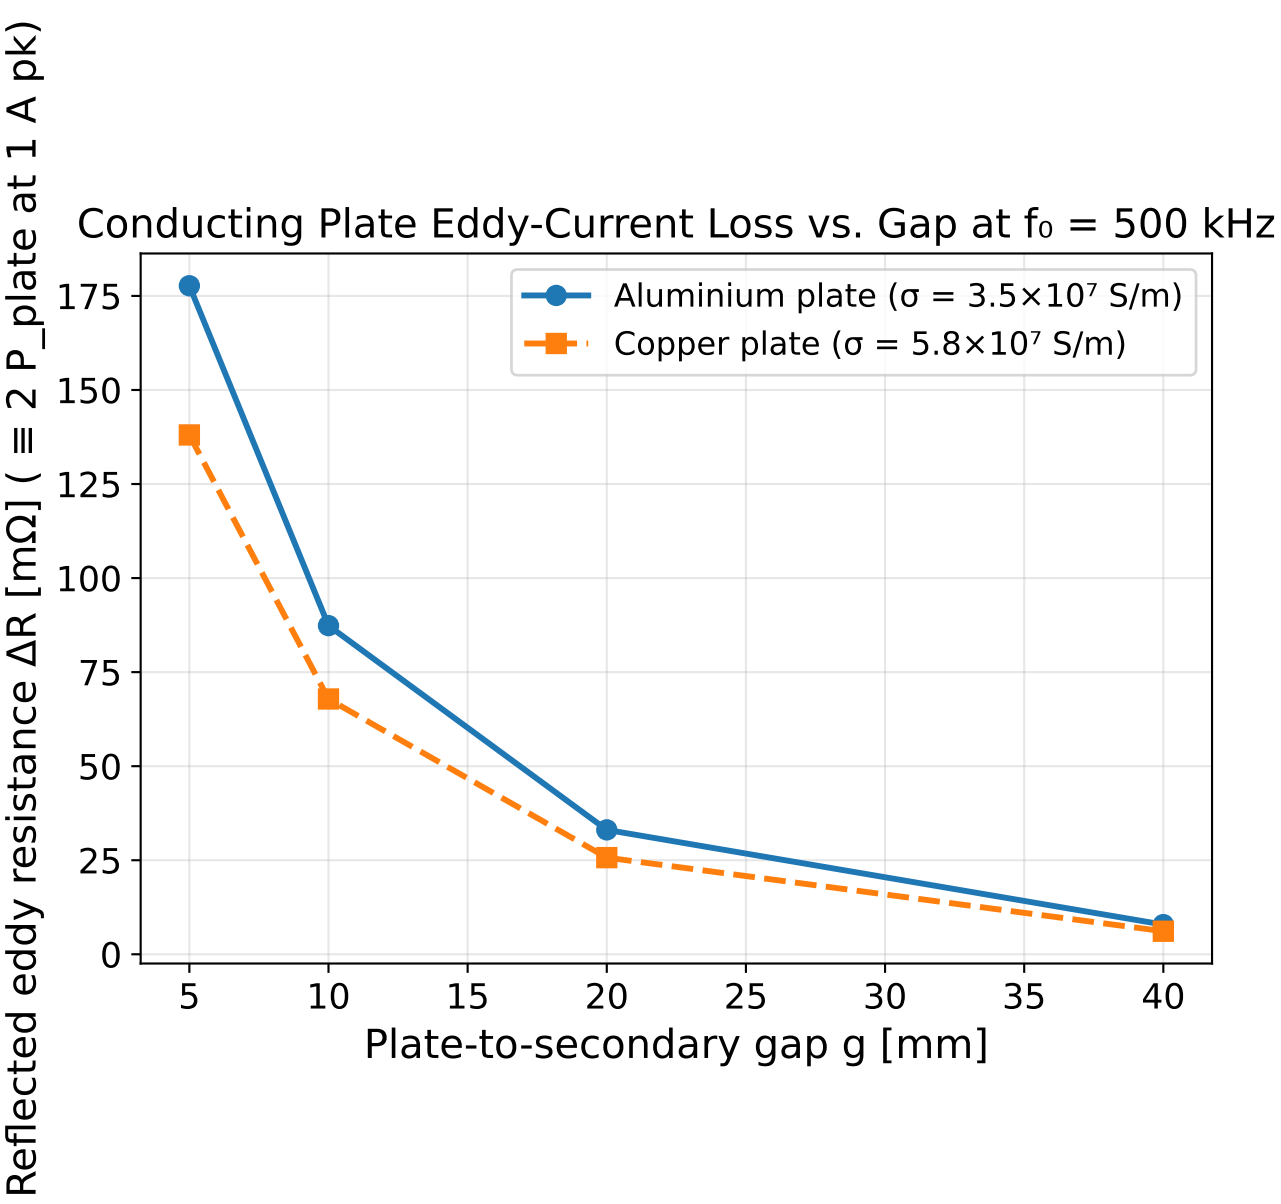
Conducting Plate Eddy-Current Loss vs. Gap at f₀ = 500 kHz
Aluminium plate (σ = 3.5×10⁷ S/m)
Copper plate (σ = 5.8×10⁷ S/m)
Reflected eddy resistance ΔR [mΩ] (≡ 2 P_plate at 1 A pk)
Plate-to-secondary gap g [mm]
0
25
50
75
100
125
150
175
5
10
15
20
25
30
35
40