

7.41. In many practical situations a signal is recorded in the presence of an echo, which we would like to remove by appropriate processing. For example, in Figure P7.41(a), we illustrate a system in which a receiver simultaneously receives a signal $x(t)$ and an echo represented by an attenuated delayed replication of $x(t)$. Thus, the receiver output is $s(t) = x(t) + \alpha x(t - T_0)$, where $|\alpha| < 1$. This output is to be processed to recover $x(t)$ by first converting to a sequence and then using an appropriate digital filter $h[n]$, as indicated in Figure P7.41(b).

Assume that $x(t)$ is band limited [i.e., $X(j\omega) = 0$ for $|\omega| > \omega_M$] and that $|\alpha| < 1$.

- If $T_0 < \pi/\omega_M$, and the sampling period is taken to be equal to T_0 (i.e., $T = T_0$), determine the difference equation for the digital filter $h[n]$ such that $y_c(t)$ is proportional to $x(t)$.
- With the assumptions of part (a), specify the gain A of the ideal lowpass filter such that $y_c(t) = x(t)$.
- Now suppose that $\pi/\omega_M < T_0 < 2\pi/\omega_M$. Determine a choice for the sampling period T , the lowpass filter gain A , and the frequency response for the digital filter $h[n]$ such that $y_c(t)$ is proportional to $x(t)$.



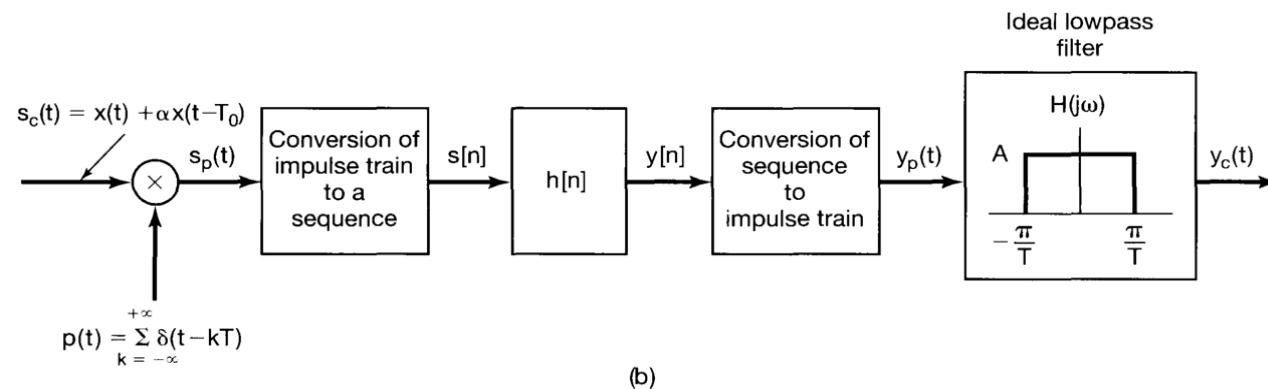


Figure P7.41

$$\omega_s > 2\omega_M$$

Discretization: C/D Conversion

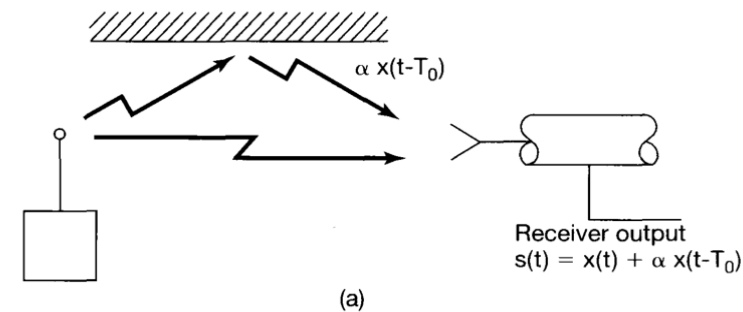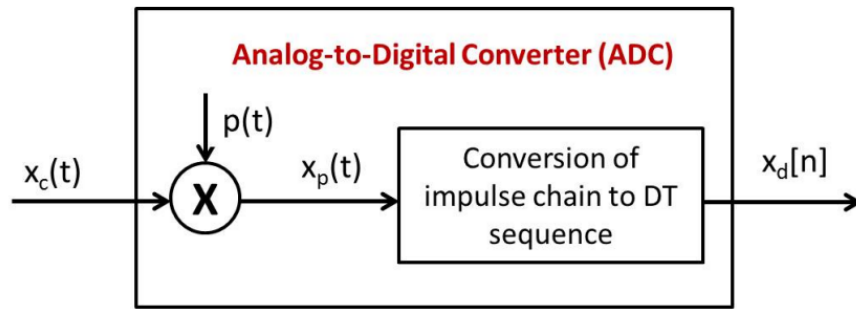

- Mathematical Interpretation (Fourier Transform)

$$\begin{aligned}
 x_c(t) &\longleftrightarrow X_c(j\omega) \\
 x_p(t) = \sum_{n=-\infty}^{+\infty} x_c(nT)\delta(t - nT) &\longleftrightarrow X_p(j\omega) = \frac{1}{T} \sum_{k=-\infty}^{+\infty} X_c(j(\omega - k\omega_s)) \\
 x_d[n] = x_c(nT) &\longleftrightarrow X_d(e^{j\omega}) = X_p(j\omega/T)
 \end{aligned}$$

(a) The Nyquist rate for the signal $x(t)$ is $2\omega_M$ (i.e. $T < \pi / \omega_M$).

$y_c(t)$ will be proportional to $x(t)$ as long as $y[n] = \beta x[n]$. Now

$$\begin{aligned}
 s[n] &= x(nT_0) + \alpha x(nT_0 - T_0) \\
 &= x[n] + \alpha x[n-1] \\
 &= \frac{1}{\beta} (y[n] + \alpha y[n-1])
 \end{aligned}$$



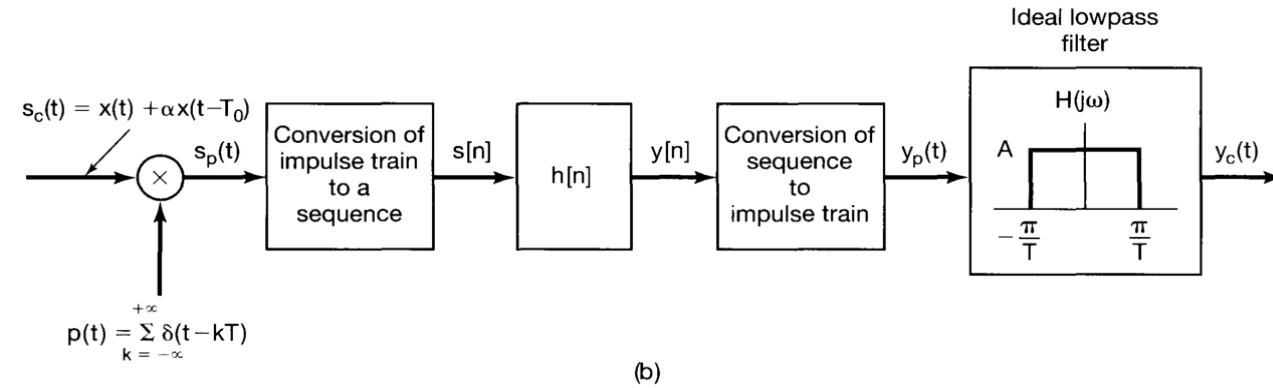


Figure P7.41

Without loss of generality, we set $\beta = 1$. Therefore, the difference equation for the filter $h[n]$ is

$$y[n] + \alpha y[n-1] = s[n]$$

DT Processing and Conversion

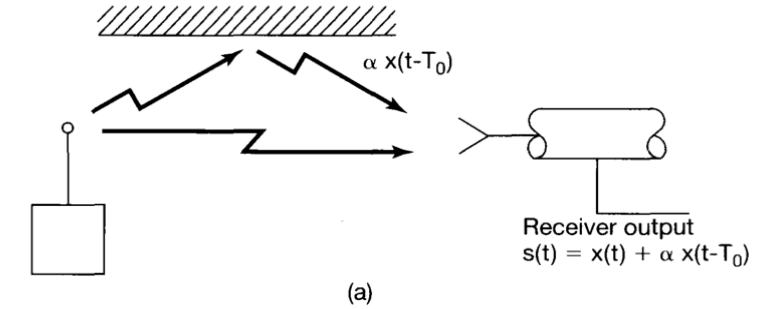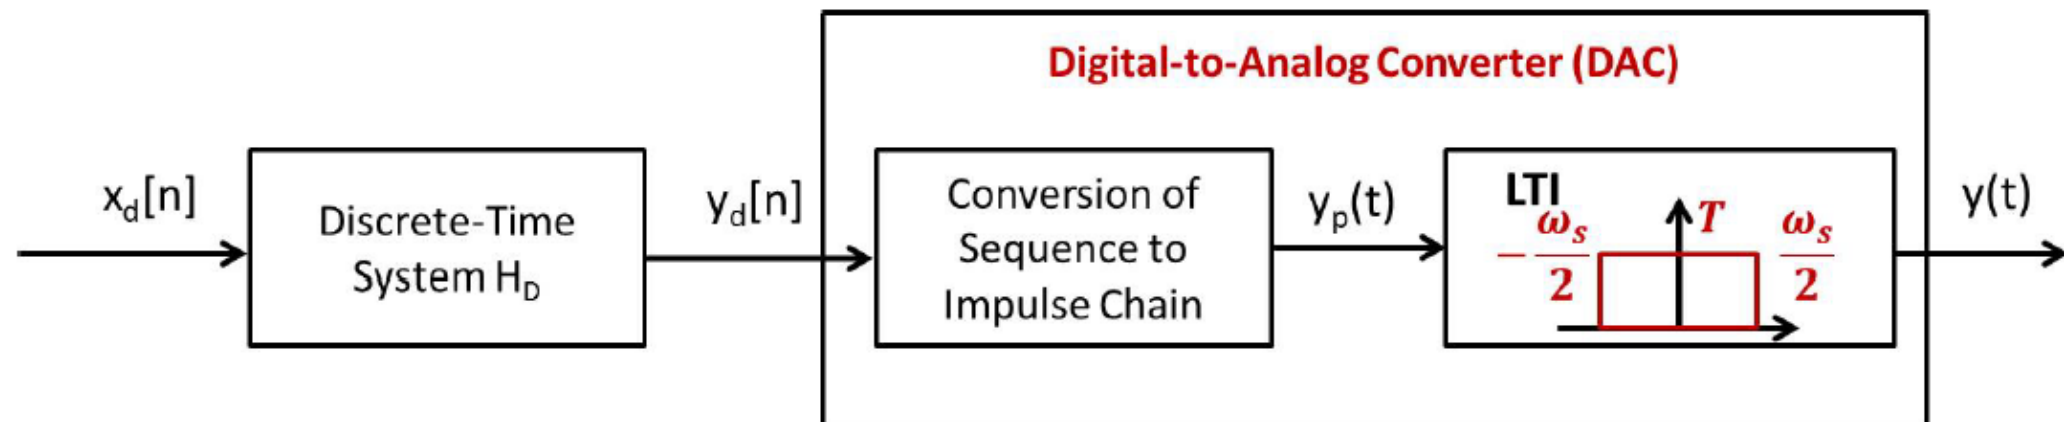

- Mathematical Interpretation (Fourier Transform)

$$y_d[n] = x_d[n] * h_D[n] \quad \longleftrightarrow \quad Y_d(e^{j\omega}) = X_d(e^{j\omega})H_D(e^{j\omega})$$

$$y_p(t) = \sum_{n=-\infty}^{\infty} y_d[n]\delta(t - nT) \quad \longleftrightarrow \quad Y_p(j\omega) = Y_d(e^{j\omega T})$$

$$y(t) = y_p(t) * h_{LP}(t) \quad \longleftrightarrow \quad Y(j\omega) = Y_p(j\omega)H_{LP}(j\omega)$$

Input vs. Output

$$\begin{aligned} Y(j\omega) &= Y_p(j\omega)H_{LP}(j\omega) = Y_d(e^{j\omega T})H_{LP}(j\omega) \\ &= X_d(e^{j\omega T})H_D(e^{j\omega T})H_{LP}(j\omega) \\ &= X_p(j\omega)H_D(e^{j\omega T})H_{LP}(j\omega) \\ &= \left[\frac{1}{T} \sum_{k=-\infty}^{+\infty} X_c(j(\omega - k\omega_s)) \right] H_D(e^{j\omega T})H_{LP}(j\omega) \\ &= X_c(j\omega)H_D(e^{j\omega T}) \\ &= X_c(j\omega)\tilde{H}_D(e^{j\omega T}) \end{aligned} \tag{1}$$

where

$$\tilde{H}_D(e^{j\omega T}) = \begin{cases} H_D(e^{j\omega T}) & |\omega| < \omega_s/2 \\ 0 & \text{otherwise} \end{cases} \tag{2}$$

- It is equivalent to a continuous-time LTI system $H_C(j\omega) = \tilde{H}_D(e^{j\omega T})$
- $H_D(e^{j\omega T})$ is a periodic extension of $\tilde{H}_D(e^{j\omega T})$ with period $\omega_s = 2\pi/T$

7.41. In many practical situations a signal is recorded in the presence of an echo, which we would like to remove by appropriate processing. For example, in Figure P7.41(a), we illustrate a system in which a receiver simultaneously receives a signal $x(t)$ and an echo represented by an attenuated delayed replication of $x(t)$. Thus, the receiver output is $s(t) = x(t) + \alpha x(t - T_0)$, where $|\alpha| < 1$. This output is to be processed to recover $x(t)$ by first converting to a sequence and then using an appropriate digital filter $h[n]$, as indicated in Figure P7.41(b).

Assume that $x(t)$ is band limited [i.e., $X(j\omega) = 0$ for $|\omega| > \omega_M$] and that $|\alpha| < 1$.

- If $T_0 < \pi/\omega_M$, and the sampling period is taken to be equal to T_0 (i.e., $T = T_0$), determine the difference equation for the digital filter $h[n]$ such that $y_c(t)$ is proportional to $x(t)$.
- With the assumptions of part (a), specify the gain A of the ideal lowpass filter such that $y_c(t) = x(t)$.
- Now suppose that $\pi/\omega_M < T_0 < 2\pi/\omega_M$. Determine a choice for the sampling period T , the lowpass filter gain A , and the frequency response for the digital filter $h[n]$ such that $y_c(t)$ is proportional to $x(t)$.

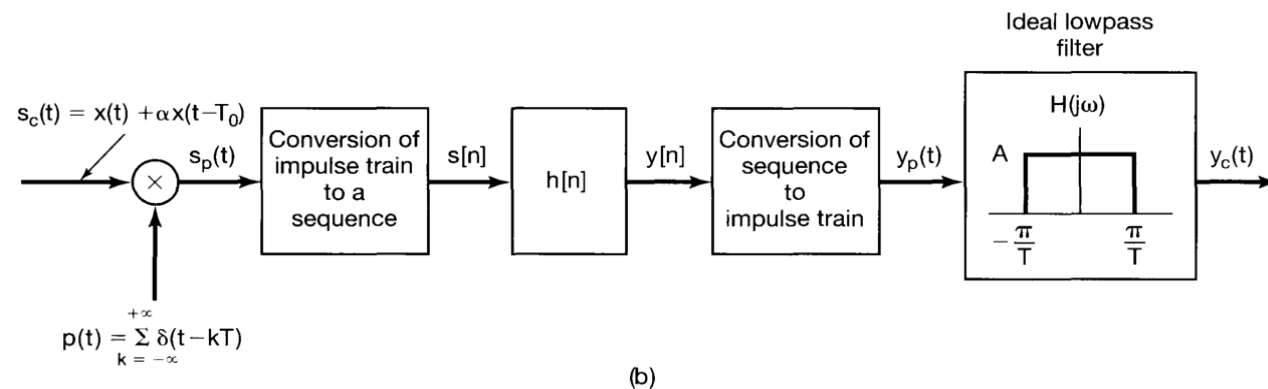
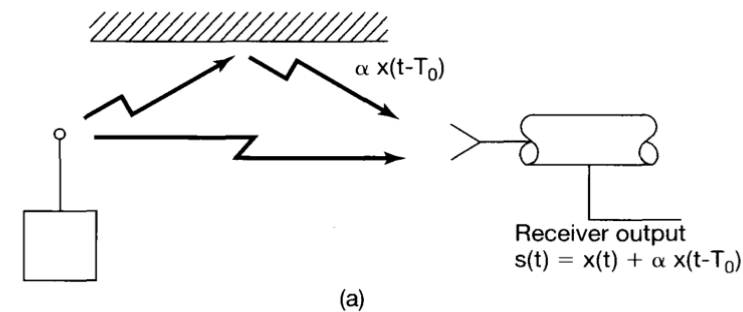


Figure P7.41

(b) From (a) we have $y[n] + \alpha y[n-1] = s[n]$. Therefore, we have

$$H(e^{j\Omega}) = \frac{Y(e^{j\Omega})}{S(e^{j\Omega})} = \frac{X(e^{j\Omega})}{X(e^{j\Omega}) + \alpha e^{-j\Omega} X(e^{j\Omega})} = \frac{1}{1 + \alpha e^{-j\Omega}}$$

From Figure P7.41(b), we have

$$H_{eq}(j\omega) = \frac{A}{T_0} H(e^{j\omega T_0}) = \frac{A}{T_0} \frac{1}{1 + \alpha e^{-j\omega T_0}}, \quad (1.1)$$

where $H_{eq}(j\omega)$ is the system response of the overall continuous-time system.

Also, since we require $y_c(t) = x(t)$, we have

$$H_{eq}(j\omega) = \frac{Y_c(j\omega)}{S_c(j\omega)} = \frac{X(j\omega)}{S_c(j\omega)} = \frac{X(j\omega)}{X(j\omega) + \alpha e^{-j\omega T_0} X(j\omega)} = \frac{1}{1 + \alpha e^{-j\omega T_0}} \quad (1.2)$$

Comparing eq. (1.1) and (1.2), we get $A = T_0$

7.41. In many practical situations a signal is recorded in the presence of an echo, which we would like to remove by appropriate processing. For example, in Figure P7.41(a), we illustrate a system in which a receiver simultaneously receives a signal $x(t)$ and an echo represented by an attenuated delayed replication of $x(t)$. Thus, the receiver output is $s(t) = x(t) + \alpha x(t - T_0)$, where $|\alpha| < 1$. This output is to be processed to recover $x(t)$ by first converting to a sequence and then using an appropriate digital filter $h[n]$, as indicated in Figure P7.41(b).

Assume that $x(t)$ is band limited [i.e., $X(j\omega) = 0$ for $|\omega| > \omega_M$] and that $|\alpha| < 1$.

- If $T_0 < \pi/\omega_M$, and the sampling period is taken to be equal to T_0 (i.e., $T = T_0$), determine the difference equation for the digital filter $h[n]$ such that $y_c(t)$ is proportional to $x(t)$.
- With the assumptions of part (a), specify the gain A of the ideal lowpass filter such that $y_c(t) = x(t)$.
- Now suppose that $\pi/\omega_M < T_0 < 2\pi/\omega_M$. Determine a choice for the sampling period T , the lowpass filter gain A , and the frequency response for the digital filter $h[n]$ such that $y_c(t)$ is proportional to $x(t)$.

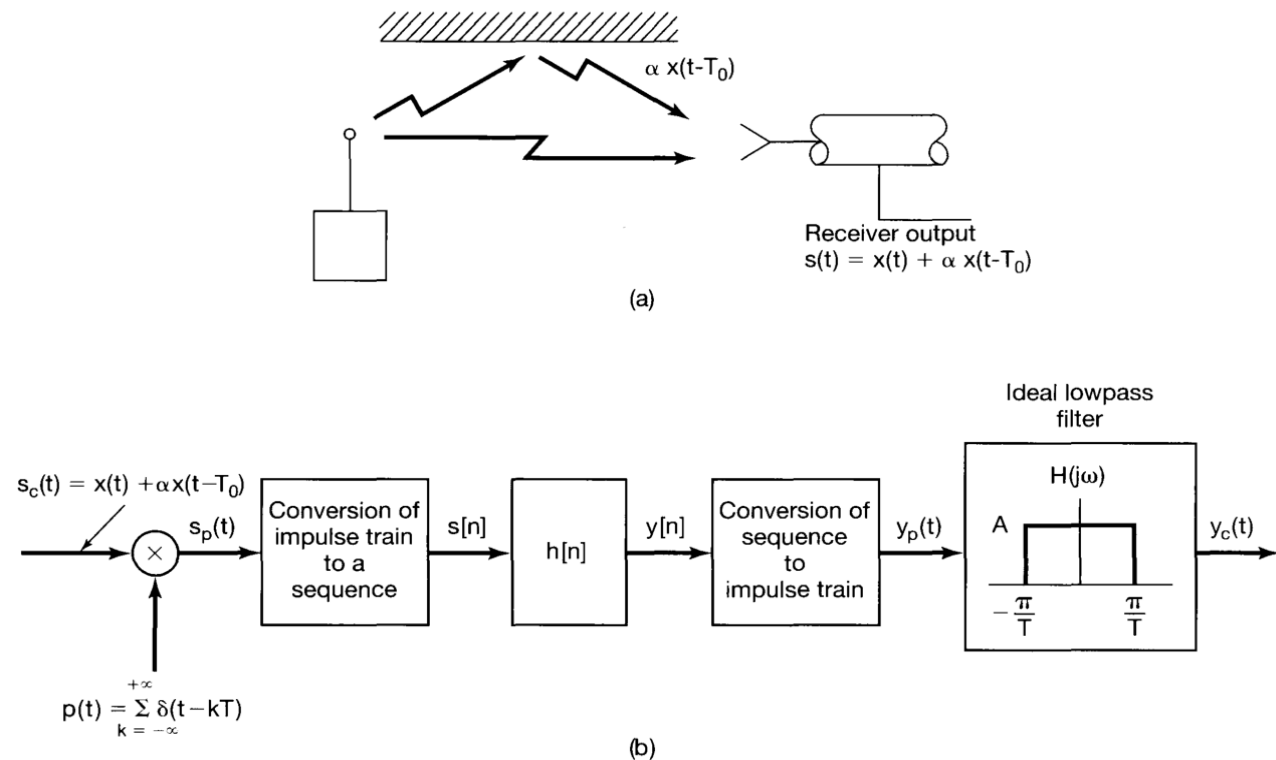


Figure P7.41

(c) We require a T to avoid aliasing. Therefore, $T < \pi / \omega_M$.

With the analysis in (b), we know $H_{eq}(j\omega) = \frac{A}{T} H(e^{j\omega T})$ and $H_{eq}(j\omega) = \frac{1}{1 + \alpha e^{-j\omega T_0}}$.

For these to be consistent, we have $A = T$ and $H(e^{j\omega T}) = \frac{1}{1 + \alpha e^{-j\omega T_0}}$. Let $\Omega = \omega T$, we have

$$H(e^{j\Omega}) = \frac{1}{1 + \alpha e^{-j\Omega T_0/T}}$$

- 7.44.** Suppose we wish to design a continuous-time generator that is capable of producing sinusoidal signals at any frequency satisfying

$$\omega_1 \leq \omega \leq \omega_2,$$

where ω_1 and ω_2 are given positive numbers.

Our design is to take the following form: We have stored a discrete-time cosine wave of period N ; that is, we have stored $x[0], \dots, x[N-1]$, where

$$x[k] = \cos\left(\frac{2\pi k}{N}\right).$$

Every T seconds we output an impulse weighted by a value of $x[k]$, where we proceed through the values of $k = 0, 1, \dots, N-1$ in a cyclic fashion. That is,

$$y_p(kT) = x(k \text{ modulo } N),$$

or equivalently,

$$y_p(kT) = \cos\left(\frac{2\pi k}{N}\right),$$

and

$$y_p(t) = \sum_{k=-\infty}^{+\infty} \cos\left(\frac{2\pi k}{N}\right) \delta(t - kT).$$

- (a) Show that by adjusting T , we can adjust the frequency of the cosine signal being sampled. That is, show that

$$y_p(t) = (\cos \omega_0 t) \sum_{k=-\infty}^{+\infty} \delta(t - kT),$$

where $\omega_0 = 2\pi/NT$. Determine a range of values for T such that $y_p(t)$ can represent samples of a cosine signal with a frequency that is variable over the full range

$$\omega_1 \leq \omega \leq \omega_2.$$

- (b) Sketch $Y_p(j\omega)$.

The overall system for generating a continuous-time sinusoid is depicted in Figure P7.44(a). $H(j\omega)$ is an ideal lowpass filter with unity gain in its pass-band; that is,

$$H(j\omega) = \begin{cases} 1, & |\omega| < \omega_c \\ 0, & \text{otherwise} \end{cases}.$$

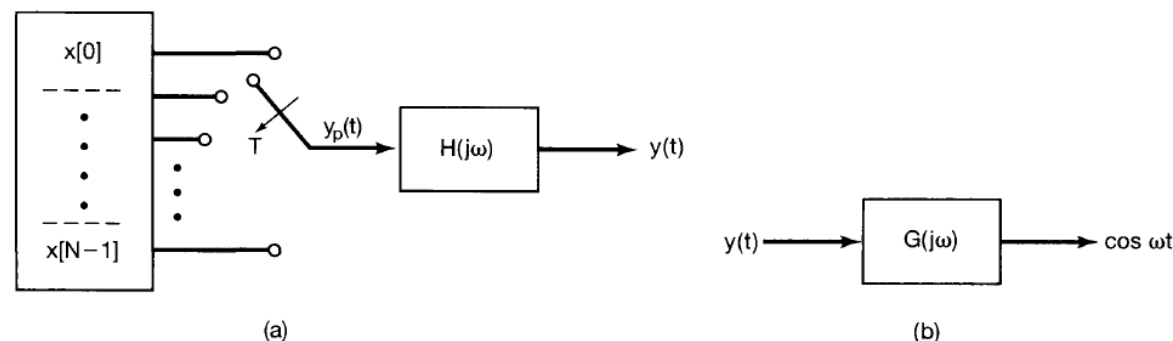


Figure P7.44

The parameter ω_c is to be determined so that $y(t)$ is a continuous-time cosine signal in the desired frequency band.

- (c) Consider any value of T in the range determined in part (a). Determine the minimum value of N and some value for ω_c such that $y(t)$ is a cosine signal in the range $\omega_1 \leq \omega \leq \omega_2$.
- (d) The amplitude of $y(t)$ will vary, depending upon the value of ω chosen between ω_1 and ω_2 . Thus, we must design a system $G(j\omega)$ that normalizes the signal as shown in Figure P7.44(b). Find such a $G(j\omega)$.

7.44. Suppose we wish to design a continuous-time generator that is capable of producing sinusoidal signals at any frequency satisfying

$$\omega_1 \leq \omega \leq \omega_2,$$

where ω_1 and ω_2 are given positive numbers.

Our design is to take the following form: We have stored a discrete-time cosine wave of period N ; that is, we have stored $x[0], \dots, x[N-1]$, where

$$x[k] = \cos\left(\frac{2\pi k}{N}\right).$$

Every T seconds we output an impulse weighted by a value of $x[k]$, where we proceed through the values of $k = 0, 1, \dots, N-1$ in a cyclic fashion. That is,

$$y_p(kT) = x(k \text{ modulo } N),$$

or equivalently,

$$y_p(kT) = \cos\left(\frac{2\pi k}{N}\right),$$

and

$$y_p(t) = \sum_{k=-\infty}^{+\infty} \cos\left(\frac{2\pi k}{N}\right) \delta(t - kT).$$

(a) Show that by adjusting T , we can adjust the frequency of the cosine signal being sampled. That is, show that

$$y_p(t) = (\cos \omega_0 t) \sum_{k=-\infty}^{+\infty} \delta(t - kT),$$

where $\omega_0 = 2\pi/NT$. Determine a range of values for T such that $y_p(t)$ can represent samples of a cosine signal with a frequency that is variable over the full range

$$\omega_1 \leq \omega \leq \omega_2.$$

$$y_p(t) = \sum_{k=-\infty}^{\infty} \cos\left(\frac{2\pi k}{N}\right) \delta(t - kT) \quad \left(\omega_0 = \frac{2\pi}{N}T\right)$$

$$y_p(t) = \sum_{k=-\infty}^{\infty} \cos(\omega_0 kT) \delta(t - kT)$$

$$= \sum_{k=-\infty}^{\infty} \cos(\omega_0 t) \delta(t - kT)$$

$$= \cos(\omega_0 t) \sum_{k=-\infty}^{\infty} \delta(t - kT)$$

- 7.44.** Suppose we wish to design a continuous-time generator that is capable of producing sinusoidal signals at any frequency satisfying

$$\omega_1 \leq \omega \leq \omega_2,$$

where ω_1 and ω_2 are given positive numbers.

Our design is to take the following form: We have stored a discrete-time cosine wave of period N ; that is, we have stored $x[0], \dots, x[N-1]$, where

$$x[k] = \cos\left(\frac{2\pi k}{N}\right).$$

Every T seconds we output an impulse weighted by a value of $x[k]$, where we proceed through the values of $k = 0, 1, \dots, N-1$ in a cyclic fashion. That is,

$$y_p(kT) = x(k \text{ modulo } N),$$

or equivalently,

$$y_p(kT) = \cos\left(\frac{2\pi k}{N}\right),$$

and

$$y_p(t) = \sum_{k=-\infty}^{+\infty} \cos\left(\frac{2\pi k}{N}\right) \delta(t - kT).$$

- (a)** Show that by adjusting T , we can adjust the frequency of the cosine signal being sampled. That is, show that

$$y_p(t) = (\cos \omega_0 t) \sum_{k=-\infty}^{+\infty} \delta(t - kT),$$

where $\omega_0 = 2\pi/NT$. Determine a range of values for T such that $y_p(t)$ can represent samples of a cosine signal with a frequency that is variable over the full range

$$\omega_1 \leq \omega \leq \omega_2.$$

- (b)** Sketch $Y_p(j\omega)$.

The overall system for generating a continuous-time sinusoid is depicted in Figure P7.44(a). $H(j\omega)$ is an ideal lowpass filter with unity gain in its pass-band; that is,

$$H(j\omega) = \begin{cases} 1, & |\omega| < \omega_c \\ 0, & \text{otherwise} \end{cases}.$$

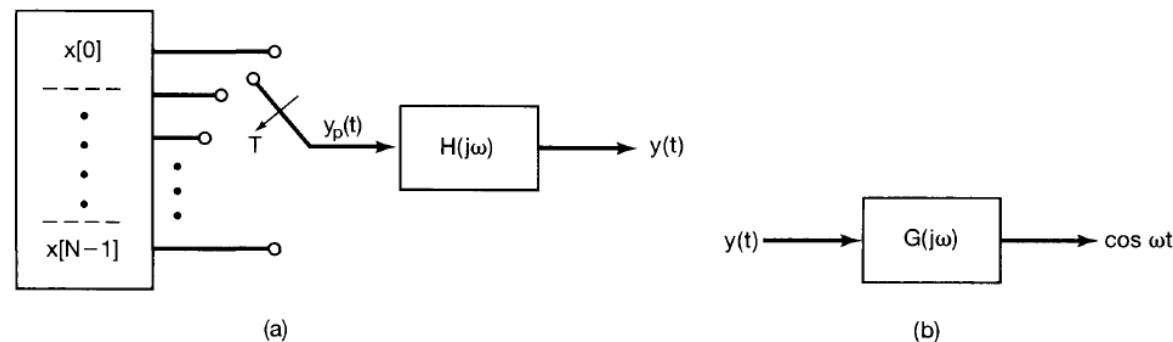


Figure P7.44

The parameter ω_c is to be determined so that $y(t)$ is a continuous-time cosine signal in the desired frequency band.

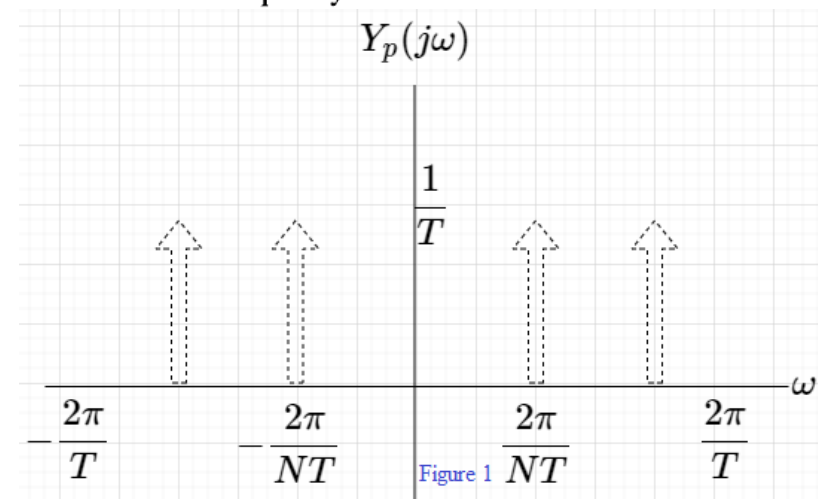


Figure 1

- 7.44.** Suppose we wish to design a continuous-time generator that is capable of producing sinusoidal signals at any frequency satisfying

$$\omega_1 \leq \omega \leq \omega_2,$$

where ω_1 and ω_2 are given positive numbers.

Our design is to take the following form: We have stored a discrete-time cosine wave of period N ; that is, we have stored $x[0], \dots, x[N-1]$, where

$$x[k] = \cos\left(\frac{2\pi k}{N}\right).$$

Every T seconds we output an impulse weighted by a value of $x[k]$, where we proceed through the values of $k = 0, 1, \dots, N-1$ in a cyclic fashion. That is,

$$y_p(kT) = x(k \text{ modulo } N),$$

or equivalently,

$$y_p(kT) = \cos\left(\frac{2\pi k}{N}\right),$$

and

$$y_p(t) = \sum_{k=-\infty}^{+\infty} \cos\left(\frac{2\pi k}{N}\right) \delta(t - kT).$$

- (a)** Show that by adjusting T , we can adjust the frequency of the cosine signal being sampled. That is, show that

$$y_p(t) = (\cos \omega_0 t) \sum_{k=-\infty}^{+\infty} \delta(t - kT),$$

where $\omega_0 = 2\pi/NT$. Determine a range of values for T such that $y_p(t)$ can represent samples of a cosine signal with a frequency that is variable over the full range

$$\omega_1 \leq \omega \leq \omega_2.$$

- (b)** Sketch $Y_p(j\omega)$.

The overall system for generating a continuous-time sinusoid is depicted in Figure P7.44(a). $H(j\omega)$ is an ideal lowpass filter with unity gain in its pass-band; that is,

$$H(j\omega) = \begin{cases} 1, & |\omega| < \omega_c \\ 0, & \text{otherwise} \end{cases}.$$

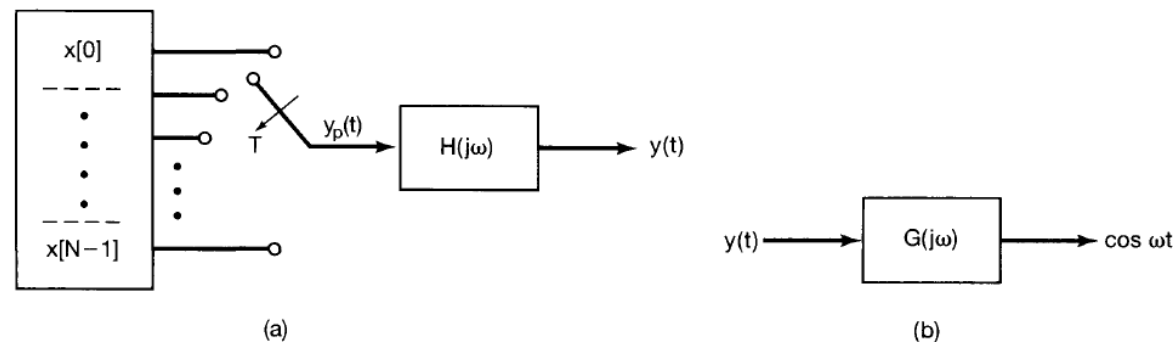


Figure P7.44

The parameter ω_c is to be determined so that $y(t)$ is a continuous-time cosine signal in the desired frequency band.

- (c)** Consider any value of T in the range determined in part (a). Determine the minimum value of N and some value for ω_c such that $y(t)$ is a cosine signal in the range $\omega_1 \leq \omega \leq \omega_2$.

- (c)** To avoid aliasing, we require that $\frac{2\pi}{T} > 2\omega_0 = \frac{4\pi}{NT}$. This implies that $N > 2$. Therefore, the

minimum value of N is 3. By inspection of $Y_p(j\omega)$, we have $\frac{2\pi}{NT} < \omega_c < \frac{2\pi}{T} - \frac{2\pi}{NT}$. For $N = 3$, we

$$\text{have } \frac{2\pi}{3T} < \omega_c < \frac{4\pi}{3T}.$$

- 7.44.** Suppose we wish to design a continuous-time generator that is capable of producing sinusoidal signals at any frequency satisfying

$$\omega_1 \leq \omega \leq \omega_2,$$

where ω_1 and ω_2 are given positive numbers.

Our design is to take the following form: We have stored a discrete-time cosine wave of period N ; that is, we have stored $x[0], \dots, x[N-1]$, where

$$x[k] = \cos\left(\frac{2\pi k}{N}\right).$$

Every T seconds we output an impulse weighted by a value of $x[k]$, where we proceed through the values of $k = 0, 1, \dots, N-1$ in a cyclic fashion. That is,

$$y_p(kT) = x(k \text{ modulo } N),$$

or equivalently,

$$y_p(kT) = \cos\left(\frac{2\pi k}{N}\right),$$

and

$$y_p(t) = \sum_{k=-\infty}^{+\infty} \cos\left(\frac{2\pi k}{N}\right) \delta(t - kT).$$

- (a) Show that by adjusting T , we can adjust the frequency of the cosine signal being sampled. That is, show that

$$y_p(t) = (\cos \omega_0 t) \sum_{k=-\infty}^{+\infty} \delta(t - kT),$$

where $\omega_0 = 2\pi/NT$. Determine a range of values for T such that $y_p(t)$ can represent samples of a cosine signal with a frequency that is variable over the full range

$$\omega_1 \leq \omega \leq \omega_2.$$

- (b) Sketch $Y_p(j\omega)$.

The overall system for generating a continuous-time sinusoid is depicted in Figure P7.44(a). $H(j\omega)$ is an ideal lowpass filter with unity gain in its pass-band; that is,

$$H(j\omega) = \begin{cases} 1, & |\omega| < \omega_c \\ 0, & \text{otherwise} \end{cases}.$$

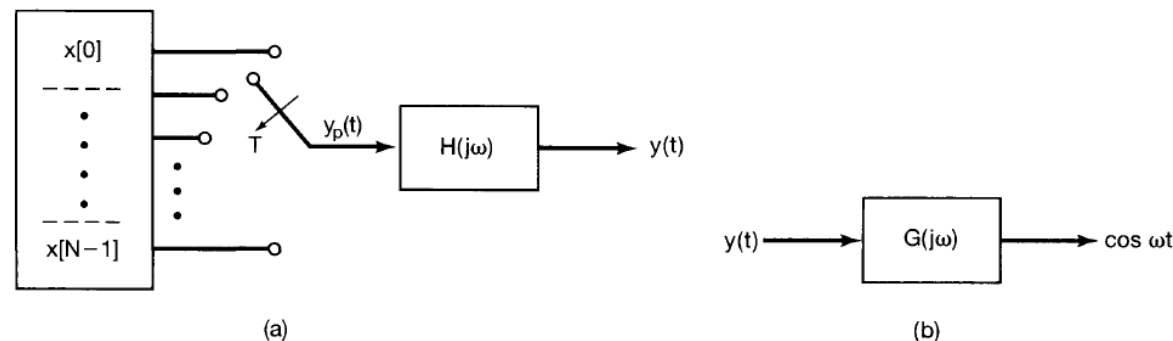


Figure P7.44

The parameter ω_c is to be determined so that $y(t)$ is a continuous-time cosine signal in the desired frequency band.

- (c) Consider any value of T in the range determined in part (a). Determine the minimum value of N and some value for ω_c such that $y(t)$ is a cosine signal in the range $\omega_1 \leq \omega \leq \omega_2$.
- (d) The amplitude of $y(t)$ will vary, depending upon the value of ω chosen between ω_1 and ω_2 . Thus, we must design a system $G(j\omega)$ that normalizes the signal as shown in Figure P7.44(b). Find such a $G(j\omega)$.

$$G(j\omega) = \begin{cases} T, & -\omega_c \leq \omega \leq \omega_c \\ \text{arbitrary}, & \text{otherwise} \end{cases}$$

7.47. Suppose $x[n]$ has a Fourier transform that is zero for $\pi/3 \leq |\omega| \leq \pi$. Show that

$$x[n] = \sum_{k=-\infty}^{\infty} x[3k] \left(\frac{\sin(\frac{\pi}{3}(n-3k))}{\frac{\pi}{3}(n-3k)} \right).$$

7.47. Suppose $x[n]$ has a Fourier transform that is zero for $\pi/3 \leq |\omega| \leq \pi$. Show that

$$x[n] = \sum_{k=-\infty}^{\infty} x[3k] \left(\frac{\sin(\frac{\pi}{3}(n-3k))}{\frac{\pi}{3}(n-3k)} \right).$$

Let us define a signal

$$x_p[n] = x[n] \sum_{k=-\infty}^{\infty} \delta[n-3k] = \sum_{k=-\infty}^{\infty} x[3k] \delta[n-3k].$$

From Section 7.5.1, we know that the Fourier transform of $x_p[n]$ is

$$X_p(e^{j\omega}) = \frac{1}{3} \sum_{k=0}^2 X(e^{j(\omega-2\pi k/3)}).$$

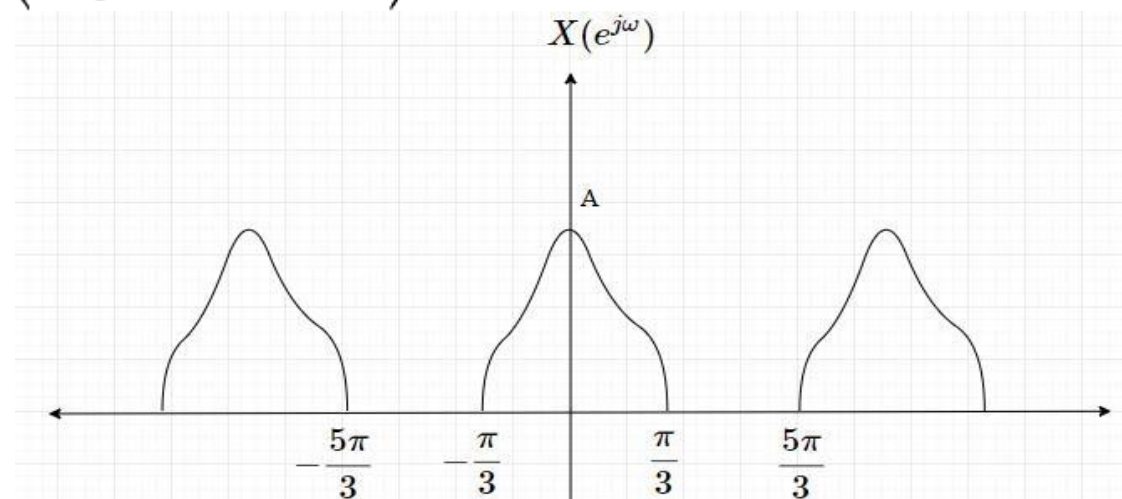


Figure 1

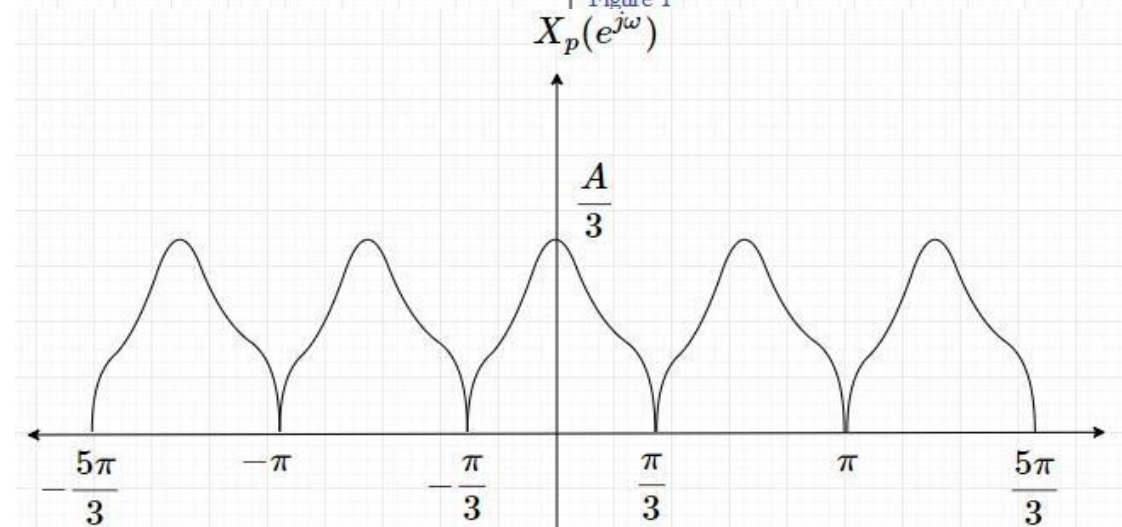


Figure 2

7.47. Suppose $x[n]$ has a Fourier transform that is zero for $\pi/3 \leq |\omega| \leq \pi$. Show that

$$x[n] = \sum_{k=-\infty}^{\infty} x[3k] \left(\frac{\sin(\frac{\pi}{3}(n-3k))}{\frac{\pi}{3}(n-3k)} \right).$$

Let us define a signal

$$x_p[n] = x[n] \sum_{k=-\infty}^{\infty} \delta[n-3k] = \sum_{k=-\infty}^{\infty} x[3k] \delta[n-3k].$$

From Section 7.5.1, we know that the Fourier transform of $x_p[n]$ is

$$X_p(e^{j\omega}) = \frac{1}{3} \sum_{k=0}^2 X(e^{j(\omega-2\pi k/3)}).$$

$$\begin{aligned} x[n] &= x_p[n] * \frac{3 \sin(\pi n/3)}{\pi n} \\ &= \left\{ \sum_{k=-\infty}^{\infty} x[3k] \delta[n-3k] \right\} * \frac{3 \sin(\pi n/3)}{\pi n} \\ &= \sum_{k=-\infty}^{\infty} x[3k] \frac{\sin(\pi(n-3k)/3)}{\pi(n-3k)/3} \end{aligned}$$

7.49. As discussed in Section 7.5 and illustrated in Figure 7.37, the procedure for interpolation or upsampling by an integer factor N can be thought of as the cascade of two operations. The first operation, involving system A , corresponds to inserting $N - 1$ zero-sequence values between each sequence value of $x[n]$, so that

$$x_p[n] = \begin{cases} x_d\left[\frac{n}{N}\right], & n = 0, \pm N, \pm 2N, \dots \\ 0, & \text{otherwise} \end{cases}$$

For exact band-limited interpolation, $H(e^{j\omega})$ is an ideal lowpass filter.

- (a) Determine whether or not system A is linear.
- (b) Determine whether or not system A is time invariant.
- (c) For $X_d(e^{j\omega})$ as sketched in Figure P7.49 and with $N = 3$, sketch $X_p(e^{j\omega})$.
- (d) For $N = 3$, $X_d(e^{j\omega})$ as in Figure P7.49, and $H(e^{j\omega})$ appropriately chosen for exact band-limited interpolation, sketch $X(e^{j\omega})$.

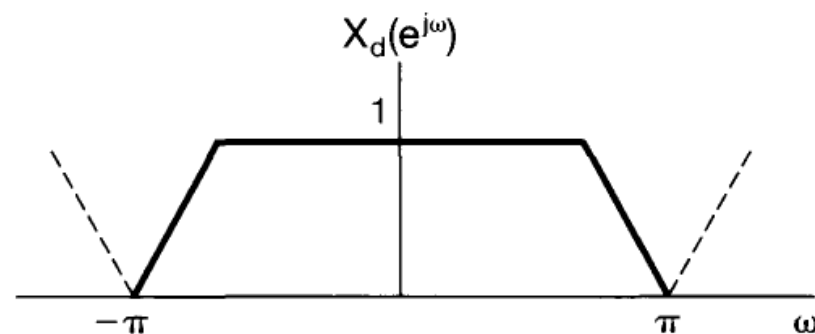


Figure P7.49

7.49. As discussed in Section 7.5 and illustrated in Figure 7.37, the procedure for interpolation or upsampling by an integer factor N can be thought of as the cascade of two operations. The first operation, involving system A , corresponds to inserting $N - 1$ zero-sequence values between each sequence value of $x[n]$, so that

$$x_p[n] = \begin{cases} x_d\left[\frac{n}{N}\right], & n = 0, \pm N, \pm 2N, \dots \\ 0, & \text{otherwise} \end{cases}$$

For exact band-limited interpolation, $H(e^{j\omega})$ is an ideal lowpass filter.

- (a) Determine whether or not system A is linear.
- (b) Determine whether or not system A is time invariant.
- (c) For $X_d(e^{j\omega})$ as sketched in Figure P7.49 and with $N = 3$, sketch $X_p(e^{j\omega})$.
- (d) For $N = 3$, $X_d(e^{j\omega})$ as in Figure P7.49, and $H(e^{j\omega})$ appropriately chosen for exact band-limited interpolation, sketch $X(e^{j\omega})$.

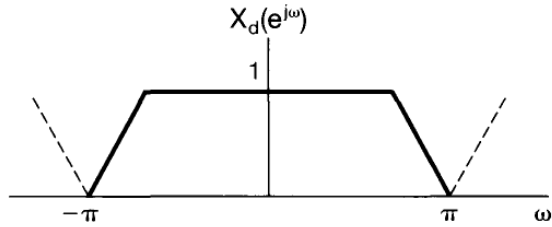


Figure P7.49

(a) Let the signals $x_{d_1}[n]$ and $x_{d_2}[n]$ be inputs to system A . Let the corresponding outputs be $x_{p_1}[n]$ and $x_{p_2}[n]$. Now consider an input of the form $x_{d_3}[n] = \alpha_1 x_{d_1}[n] + \alpha_2 x_{d_2}[n]$. This gives the output which is

$$x_{p_3}[n] = \begin{cases} \alpha_1 x_{d_1}\left[\frac{n}{N}\right] + \alpha_2 x_{d_2}\left[\frac{n}{N}\right], & n = 0, \pm N, \pm 2N, \dots \\ 0, & \text{otherwise} \end{cases}$$

Therefore, $x_{p_3}[n] = \alpha_1 x_{p_1}[n] + \alpha_2 x_{p_2}[n]$. Hence, the system is linear.

7.49. As discussed in Section 7.5 and illustrated in Figure 7.37, the procedure for interpolation or upsampling by an integer factor N can be thought of as the cascade of two operations. The first operation, involving system A , corresponds to inserting $N - 1$ zero-sequence values between each sequence value of $x[n]$, so that

$$x_p[n] = \begin{cases} x_d\left[\frac{n}{N}\right], & n = 0, \pm N, \pm 2N, \dots \\ 0, & \text{otherwise} \end{cases}$$

For exact band-limited interpolation, $H(e^{j\omega})$ is an ideal lowpass filter.

- (a) Determine whether or not system A is linear.
- (b) Determine whether or not system A is time invariant.
- (c) For $X_d(e^{j\omega})$ as sketched in Figure P7.49 and with $N = 3$, sketch $X_p(e^{j\omega})$.
- (d) For $N = 3$, $X_d(e^{j\omega})$ as in Figure P7.49, and $H(e^{j\omega})$ appropriately chosen for exact band-limited interpolation, sketch $X(e^{j\omega})$.

$$x_d[n] \rightarrow y_d[n] = x_d\left[\frac{n}{N}\right] \rightarrow y_d[n-1] = x_d\left[\frac{n-1}{N}\right]$$

$$x_{d1}[n] = x_d[n-1] \rightarrow y_{d1}[n] = x_d\left[\frac{n}{N} - 1\right]$$




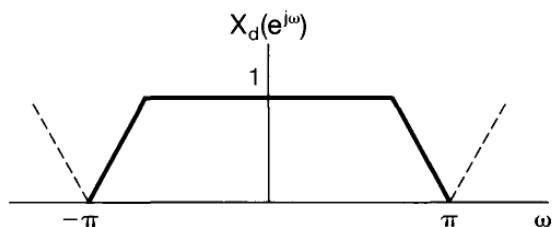


Figure P7.49

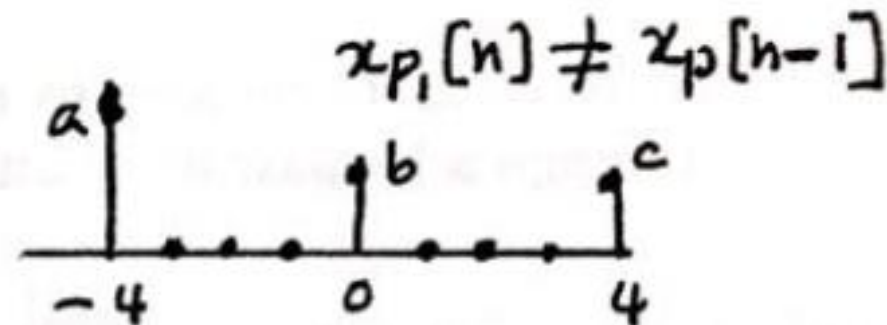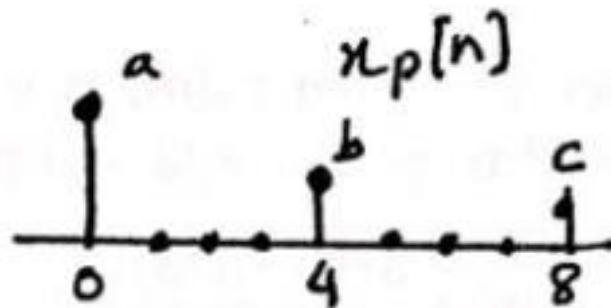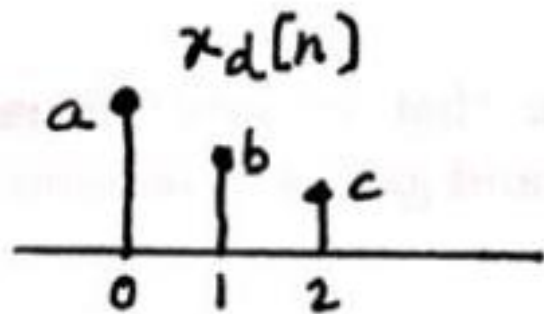

7.49. As discussed in Section 7.5 and illustrated in Figure 7.37, the procedure for interpolation or upsampling by an integer factor N can be thought of as the cascade of two operations. The first operation, involving system A , corresponds to inserting $N - 1$ zero-sequence values between each sequence value of $x[n]$, so that

$$x_p[n] = \begin{cases} x_d\left[\frac{n}{N}\right], & n = 0, \pm N, \pm 2N, \dots \\ 0, & \text{otherwise} \end{cases}$$

For exact band-limited interpolation, $H(e^{j\omega})$ is an ideal lowpass filter.

- Determine whether or not system A is linear.
- Determine whether or not system A is time invariant.
- For $X_d(e^{j\omega})$ as sketched in Figure P7.49 and with $N = 3$, sketch $X_p(e^{j\omega})$.
- For $N = 3$, $X_d(e^{j\omega})$ as in Figure P7.49, and $H(e^{j\omega})$ appropriately chosen for exact band-limited interpolation, sketch $X(e^{j\omega})$.

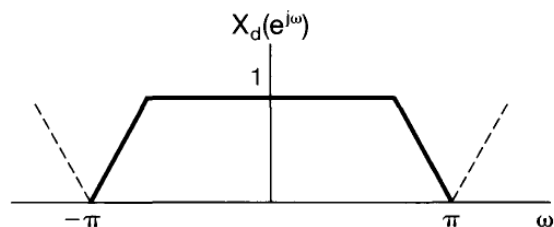


Figure P7.49

