

# Environment Similarity Index: Quantifying map-environment divergences for robot localization performance estimation and improvement

Christian Rosendahl Dam<sup>1</sup>, Daniel Suvei<sup>2</sup>  
and Leon Bodenhagen<sup>3</sup>

**Abstract**—Should take about this much space:

[illegible]

## I. INTRODUCTION

Robust, lifelong localization is a fundamental ability for all Autonomous Mobile Robots (AMRs). For many years, the gold standard to achieve this has been to use some variation of Monte Carlo Localization, as it strikes a good balance between cost and performance. It can perform global localization, and is multi-modal. For indoor industrial applications, it works well in many cases. It does however, have a major drawback: It assumes the environment is static. As soon as it's surroundings have changed too much, the particle filter diverges and fails. Making a system that is robust to change is still an ongoing challenge (ref). Some would argue that Simultaneous Localization and Mapping (SLAM) is the best way to solve this; but SLAM suffers in reliability (ref). There will always be noise, data association will never be perfect, and sooner or later, an error will find its way into the system. The resulting erroneous pose will propagate into the resulting map, reducing accuracy or cause a complete loss of localization. Since there is no ground truth to inform the system that an error has been introduced, it is impossible to recover the last valid map state. Therefore, this paper suggests a different approach; instead of updating the map, the environment is analysed to detect changes between what is seen and what is expected. This info is then used to alter the behavior of the localization system - in this case, adaptive MCL (AMCL). To do this, we need a metric that defines

how similar (or different) the observed environment is from its representation (the map). However; to the best of our knowledge, no such metric exists. We hypothesize that such a metric can be used to infer the performance of any given localization module that takes the static world assumption, and that it can be used online to adjust its behaviour, thereby reducing the pose error. Furthermore, it can be used to generate a heatmap of an environment, which can then be interpreted by a human operator, in order to identify local regions of high divergence. These are the contributions of this paper: We propose the Environment Similarity Index (ESI): An index that quantifies how well the currently observed environment matches the map. We also show how the ESI correlates to changes in the environment, both on simulated and real-world data, and how these changes impacts AMCL's performance. In addition, we show how the ESI can be used by a user to easily identify areas in their site that have changed since mapping, and therefore may increase localization errors. Finally, we show how the ESI can be used to improve AMCL's performance by using it to dynamically tune AMCL's parameters.

## II. RELATED WORK

- Bayes filtering / Probabilistic map update - Scan-BIM
- divergences - Occupancy grid vs feature maps -

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

Sed ut perspiciatis unde omnis iste natus error sit voluptatem accusantium doloremque laudantium, totam rem aperiam, eaque ipsa quae ab illo inventore veritatis et quasi architecto beatae vitae dicta sunt explicabo. Nemo enim ipsam voluptatem quia voluptas sit aspernatur aut odit aut fugit, sed quia consequuntur magni dolores eos qui ratione voluptatem sequi nesciunt.

Neque porro quisquam est, qui dolorem ipsum quia dolor sit amet, consectetur, adipisci velit, sed quia non numquam eius modi tempora incidunt ut labore et dolore magnam aliquam quaerat voluptatem. Ut enim ad minima veniam, quis

\*This work has been funded by the Danish Innovation Fund.

<sup>1</sup>Christian Rosendahl Dam is with University of Southern Denmark, The Maersk Mc-Kinney Møller Institute, Odense, Denmark  
chrddam@mmmi.sdu.dk

<sup>2</sup>Daniel Suvei is with Teradyne Robotics, Odense, Denmark  
dsu@mir-robots.com

<sup>3</sup>Leon Bodenhausen is with University of Southern Denmark, The Maersk Mc-Kinney Moller Institute, Odense, Denmark [lebo@mmmi.sdu.dk](mailto:lebo@mmmi.sdu.dk)

nostrum exercitationem ullam corporis suscipit laboriosam, nisi ut aliquid ex ea commodi consequatur.

Quis autem vel eum iure reprehenderit qui in ea voluptate velit esse quam nihil molestiae consequatur, vel illum qui dolorem eum fugiat quo voluptas nulla pariatur. At vero eos et accusamus et iusto odio dignissimos ducimus qui blanditiis praesentium voluptatum deleniti atque corrupti quos dolores et quas molestias excepturi sint occaecati cupiditate non provident.

Similique sunt in culpa qui officia deserunt mollitia animi, id est laborum et dolorum fuga. Et harum quidem rerum facilis est et expedita distinctio. Nam libero tempore, cum soluta nobis est eligendi optio cumque nihil impedit quo minus id quod maxime placeat facere possimus, omnis voluptas assumenda est, omnis dolor repellendus.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

Sed ut perspiciatis unde omnis iste natus error sit voluptatem accusantium doloremque laudantium, totam rem aperiam, eaque ipsa quae ab illo inventore veritatis et quasi architecto beatae vitae dicta sunt explicabo. Nemo enim ipsam voluptatem quia voluptas sit aspernatur aut odit aut fugit, sed quia consequuntur magni dolores eos qui ratione voluptatem sequi nesciunt.

Neque porro quisquam est, qui dolorem ipsum quia dolor sit amet, consectetur, adipisci velit, sed quia non numquam eius modi tempora incidunt ut labore et dolore magnam aliquam quaerat voluptatem. Ut enim ad minima veniam, quis nostrum exercitationem ullam corporis suscipit laboriosam, nisi ut aliquid ex ea commodi consequatur.

Quis autem vel eum iure reprehenderit qui in ea voluptate velit esse quam nihil molestiae consequatur, vel illum qui dolorem eum fugiat quo voluptas nulla pariatur. At vero eos et accusamus et iusto odio dignissimos ducimus qui blanditiis praesentium voluptatum deleniti atque corrupti quos dolores et quas molestias excepturi sint occaecati cupiditate non provident.

Similique sunt in culpa qui officia deserunt mollitia animi, id est laborum et dolorum fuga. Et harum quidem rerum facilis est et expedita distinctio. Nam libero tempore, cum soluta nobis est eligendi optio cumque nihil impedit quo minus id quod maxime placeat facere possimus, omnis voluptas assumenda est, omnis dolor repellendus.

### III. METHODOLOGY

This section describes how changes in the environment are defined, and how they are used to calculate the ESI.

#### A. Changes

The difference that is measured is defined as a *change in how the robot perceives its environment*. The change is

measured against the map the robot has of said environment. This is an important definition, with three major aspects. The first is that there can be a lot of changes to an environment, but if the robot does not sense it, then the changes by definition have no impact on the robot's ability to localize itself. The second is that it makes the index agnostic to which localization method is used, and which sensor modalities are available. A difference in observed visual features (I.e. SIFT) can be used just as well as geometric lidar, radar or sonar points, both 2D and 3D. The third is that changes that *could* be sensed but aren't, should not affect the index. Changes that happen outside the sensor coverage can naturally not be detected, and so they have no effect on localization. Unseen changes may also change back to the initial state before they are even noticed. The metric should as mentioned apply to any kind of sensors used, but since MiR robots localize via 2D Lidar, this will be the sensor modality used from here on. The reference map could likewise be of any kind (graph based, geometry based, grid based, etc), but for this project, the (occupancy) grid-based map is selected.

Any physical object can result in a change in the environment by being either removed, added, moved, deformed or alter how it interacts with the sensor. However, this can be simplified to just Removed and Added. Any of the last three changes (moved, deformed, different sensor interaction) can be considered as a combination of removing the original item, and adding in the new. The distinction makes no difference from the robots point of view. Finally, an object can be observed to be exactly as expected - this will be denoted as Matched. There are many ways a sensor reading can be categorized as either of these, and the method chosen is by no means the only viable option.

#### B. The Environment Similarity Index (ESI)

The index is a ratio, based on the current pose estimate from the robots localization module - for this paper, AMCL. On every laser-scan callback, each ray point is evaluated: Is it close to an expected obstacle in the map? If yes, count as a Matched; else, count as an Added. This tells us that an object has been added to the environment that is not on the map. In addition, all laser rays that returned a value are traced in the map from the scanner and outwards to detect obstacles that they *should* have hit but didn't. These objects count towards Removed to indicate that something on the map has been removed from the environment. These classifications are then used to calculate the ESI score; Figure X provides an overview of the classification.

#### C. Formal Definition

**Matched:** Let  $S$  be a 1D vector representing a single scan containing  $n_s = |S|$  geometric scan points  $s : S = (s_0, s_1, \dots, s_{n_s-1})$ . Only scan points that return a value within min and max range are considered valid. The points are indexed by  $i$  where  $0 \leq i < n_s$ . Let  $G$  be a 1D vector representing the discrete geometric reference map, flattened from its original  $N$ -dimensional form:

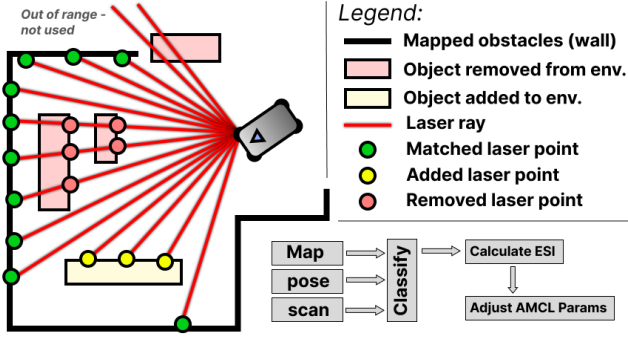


Fig. 1. Example of a figure caption.

$G = (g_0, g_1, \dots, g_{n_g-1})$  The occupancy value at index  $i$  is  $v(g_i)$ , which equals 1 if  $g_i$  represents an obstacle, and 0 otherwise. The assignment  $\lambda(i)$  returns the index in  $G$  with the shortest distance to the scan point  $s_i$ :

$$\lambda(i) = \arg \min_{0 \leq j < n_g} d(s_i, g_j) \quad (1)$$

The distance  $d(p_1, p_2)$  is the Euclidean distance between two points in  $R^N$ , where  $N$  depends on the map representation, but any distance metric can be used. Let  $T$  be a variable distance threshold. It is based on the expected yaw noise  $\gamma$  [rad] and the range of the scan point  $r(s_i)$ :

$$T(i) = \sin(\gamma) * r(s_i) \quad (2)$$

Define a match as:

$$\chi_M(i) = \begin{cases} 1 & \text{if } d(s_i, g_{\lambda(i)}) < T(i), \\ 0 & \text{otherwise.} \end{cases} \quad (3)$$

The number of matches for a single scan is then:

$$M = \sum_{i=0}^{n_s-1} \chi_M(i) \quad (4)$$

**Added:** All valid scan points are classified as either Match or Added. Therefore, the number of added is simply the number of valid scan points minus the number of matches:

$$A = n_s - M \quad (5)$$

**Removed:** Each valid scan point defines the endpoint of a line from the scanner to that point, as seen in the world frame. The laser ray  $L$  contains all the discrete map points in  $G$  that lie on that line:  $L = (l_0, l_1, \dots, l_{n_r-1})$  where  $l_0$  is closest to the scanner. We define a removed point to be every rising edge (going from free to occupied) that the ray encounters from the scanner and out. Define removed as:

$$\chi_R(j) = \begin{cases} 1 & \text{if } v(l_j) = 1 \text{ and } v(l_{j-1}) = 0 \\ 0 & \text{otherwise.} \end{cases} \quad (6)$$

The count of removed items (first encounters) in a scan with

$k$  rays is then:

$$R = \sum_k \sum_{j=1}^{n_r^{(k)}-1} \chi_R^{(k)}(j) \quad (7)$$

**ESI:** The ESI score for a single scan  $S$  is then defined as:

$$ESI \in [0, 1] = \frac{M}{M + A + R} \quad (8)$$

and since  $n_s = M + A$ , the final expression becomes:

$$ESI = \frac{\sum_{i=0}^{n_s-1} \chi_M(i)}{n_s + \sum_k \sum_{j=1}^{n_r^{(k)}-1} \chi_R^{(k)}(j)} \quad (9)$$

If the scan only sees matches, the ratio is  $1/1 = 1$ , indicating a perfect match with the map. Both added and removed points increases the denominator equally, driving the index down. Note how this reflects reality; there is no upper limit to how much you can change an environment; you can always use a sensor with a greater range and higher resolution and then add and remove more items. The index therefore converges towards zero as more changes are made, but it will only be exactly zero if it sees zero matches. The index can be calculated for any number of measurements per sensor update, and can be used for any given localization module. It is important to note that since the ESI depends on the current pose estimate, it will of course not be a correct representation of the environment if the pose error becomes too great. In order to confirm it's usability, we must show that the ESI accurately reflects the environment while the pose error is in its normal range. Then we need to show that ACML is able to maintain its pose error for no, light and moderate changes in the environment. We will confirm that the ESI can be calculated and used by a real robot in a real environment.

#### IV. EXPERIMENTS

Overall experiment intro text (Sim and real)

##### A. Simulation experiment

Sim intro text, ...

**Simulation general setup:** The simulator used is Nvidia Isaac Sim v5.0. The robot stack runs on a separate docker container, and communicates with the simulator via ROS2 (humble). The map is 50x50m, and contains 9 waypoints in a grid pattern. The direct pathways between waypoints are considered free space - obstacles are allowed to be placed in the remaining space, as seen in Figure X (red polygons). The experiment will consist of 30 individual runs. In each run, 20 boxes will spawn at random places with random orientations on the obstacle space. An occupancy grid map is then generated and used by the stack, which runs the default AMCL of Nav2 (ref). The robot will move randomly between waypoints, with random odometry noise added. While it moves, every fourth second, a randomly chosen box is moved (teleported) to a new random position in the obstacle space. This continues until all boxes have been moved. Then they are moved back into their original positions one by one, also

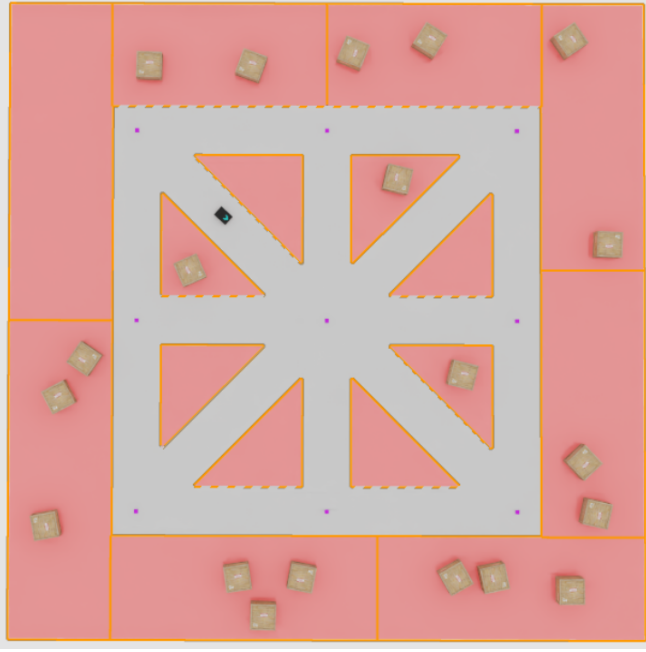


Fig. 2. Scene from Isaac Sim. Red polygons represent the obstacle space. Waypoints are marked with purple squares. The robot is seen moving from top left to center.

every fourth second. The test ends when the last box is back in place. This recreates a scenario where the robot moves from a known to an unknown area, and then back again, meaning that in the middle of the test, the map-environment differences are at their highest, as none of the boxes are at their original positions. This is to capture not only when AMCL diverges, but also to see if it is able to recover. The robot has a single 360deg FoW 2D laser scanner with a max range of 30m. As such, it cannot cover the entire map from any one position. The "true" state of the environment, denoted as Map Integrity Ratio (MIRA), is calculated as

$$MIRA = \frac{U}{U + 2M} \quad (10)$$

where  $U$  is the number of unmoved boxes, and  $M$  is the number of moved boxes.  $M$  is scaled by 2 because a moved box accounts for the same change as an added plus a removed box. It is published as a ROS2 topic, and serves as a ground truth to evaluate how closely the ESI reflects the changes. Each run will be performed twice. One with the default AMCL parameters, and one where the ESI is used to dynamically tune the  $\alpha$ -parameters of AMCL.

### 1) Hypothesis 1: ESI Validity and AMCL Performance:

We hypothesize that:

**1a)** The magnitude of the pose error of AMCL will not increase significantly when the level of map-environment divergence changes from low to moderate.

**1b)** Given a correct initial pose, and that the map-environment divergence remains low to moderate, the ESI will be able to accurately reflect the level of divergence.

To test this, we will analyze the relationship between the

MIRA, ESI and the pose and yaw errors of AMCL, which is illustrated in Figure X.

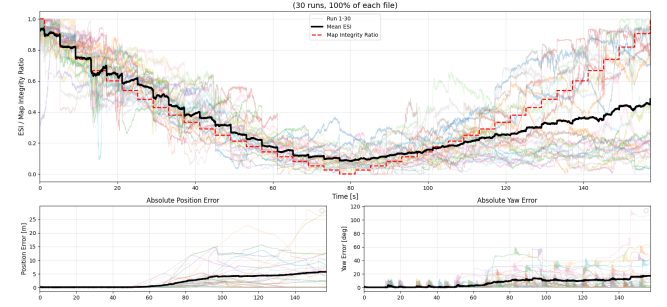


Fig. 3. Top: ESI vs map integrity ratio for default AMCL. Red = Ground truth (MIRA). Bottom left: Position error. Bottom right: Yaw error. Black = interpolated mean of the ESI, position error and yaw error, respectively.

**Results:** The ESI scores for the individual runs and their interpolated mean (black) are shown in Figure X (top), along with the ground truth MIRA value (red). The absolute position and yaw errors are also shown (bottom left and right). In general, the scores follow the MIRA closely in the first half of the test. The general pattern and stepwise changes is clearly reflected in the mean, with no visible time delay. In the beginning, since the ESI can never be more than 1, the mean is slightly below the true value. It then follows it very closely, and after about 15 seconds, the ESI rises slightly above the MIRA, which persists until just before half way through the test. Since the robot cannot observe the entire map all the time, this difference is expected: On average, there will be changes outside the range of the laser, which means that, since the environment state is only declining, the true state of the environment can only be as bad or worse than what the robot can detect. When MIRA reaches zero, the ESI is still above it, even though the map and environment are now completely different. This is caused by false positive matches and missed removed objects that results from the rising pose error, and because when a box is moved, it may randomly be placed such that it overlaps with the initial (mapped) position of another box, thus contributing to a match, also as a false positive. After this, the pose errors becomes too great, and the ESI can no longer be trusted.

Up until the 50s mark, both position and yaw error is kept low, with mean values of 0.1m and 0.57°, respectively. Yaw does exhibit some spikes to around 10 degrees, but they are quickly corrected. At this point, the ESI is about 0.27 (MIRA = 0.21). After this, they both start to increase rapidly. (Add statistical tests here - which?). This shows that, *as long as the map and environment are at least 21-27% similar, the default AMCL is able to provide accurate pose estimates in changing environments.* It also shows that, *given the robot is well localized, as long as the ESI is kept above 0.27, we can expect it to be an accurate estimate of the map-environment difference.* However, there will be scenarios where AMCL has diverged, even with high ESI scores, due to other factors such as map symmetry, lack of features, hallway areas, etc.



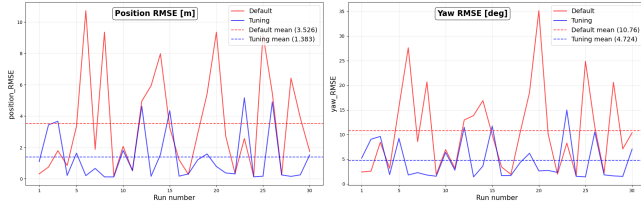


Fig. 4. Alpha parameter tuning results.

## 2) Hypothesis 2: ESI as predictor of divergence:

We hypothesize that the ESI can be used to calculate the probability that AMCL has diverged, and that the probability of being lost at time  $t$  can be modeled by an exponential decay function  $e$  as:

$$p_{lost}(t) = \sum_{i=0}^t \left[ a * e^{-b*ESI(t)+c} - d \right] \quad (11)$$

where  $a, b, c$  and  $d$  adjustable parameters, and being lost is defined as the absolute position error  $E > 0.5m$ . To obtain the training and validation data sets, we load the first 60% of all runs. The last 40% is discarded, because from this point, we can no longer trust the value of the ESI, as AMCL will likely have diverged. From this, for each set, we obtain 100 subsamples of 20 seconds each, with their starting time randomly chosen. Each subsample  $s$  is marked as lost or not lost, based on  $E$ : For any  $t$ , if  $E(t) > 0.5m$ , mark as lost. The training data will be balanced to 50% lost, and the validation data will be unbalanced with 5% lost better reflect a real distribution. A simple random optimization was performed to obtain the following parameters on the training data:  $a = 0.3$ ,  $b = 4.0$ ,  $c = -2.0$  and  $d = 0.05$ . On the validation set, these parameters yielded the following results:

3) **Hypothesis 3: ESI for tuning AMCL parameters:** The hypothesis is that the  $\alpha$ -parameters of AMCL that controls the noise added to the motion update step can be dynamically adjusted live to reduce the pose error that would otherwise increase in rapidly changing environments. The reasoning is that when the environment does not match the map, the particle cloud will continue to expand, because none of them have a significantly higher weight than the others, and therefore the filter will not converge. But if some of the particles on the edge of the cloud, where the accumulated random noise is highest, suddenly have just a few beams with a high weight (false positives), the filter will quickly converge to that wrong pose, and then be unable to recover. By using the ESI to limit this expansion, this risk is reduced. Essentially, AMCL now places more trust in the odometry, because the ESI indicates that the laser data can no longer be trusted. When (if) the environment slowly begins to match the map again, the ESI will rise, returning the filter to its default level of exploration. The two runs are analyzed and compared. Finally, the results are used to develop a method for using the ESI to predict when AMCL will diverge.

**Results** The results can be seen in figure X. The results shows that tuning the parameters reduced the mean position

and yaw RMSE by 60.77% and 56.09%, respectively. Although it does not completely prevent divergence, it is still a significant improvement that may in some cases be a decisive factor.

## B. Real-world experiment

Real world intro text **Real-world general setup** To demonstrate that the ESI can be applied in the real world, and that it can be used to visualize changes in it, we used a MiR100 AMR as the platform. It has two SICK S300 safety rated 2D Lidar sensors that scans in a horizontal plane 20cm above the ground, with a 360 degree field of view and a max range of 30m. The venue is the production hall of a packaging and labeling company. It was chosen because it represents the type of environment where AMCL often struggles; it is constantly developing, and most of the time, the the majority of what the robot is able to see consists of transient objects, as seen in Figure X. A small section of the hall was mapped, using the native mapping functionality (based on ROS1 cartographer). Two waypoints, Start and Finish, were placed. The task of the robot was simply to move from Start to Finish. In order avoid disrupting their production, instead of moving the items around, we first recorded the map, and then gradually edited it manually, resulting in similar map-environment disagreements. Some transient objects were removed, and new ones added. The robot was tested in four scenarios: 1) No, 2) light, 3) moderate and 4) severe changes. Each scenario was executed 5 times, and the ESI recorded for all runs. When the robot reached the end, its pose error was obtained from a reference coordinate system on the floor. The ESI scores found during each run were then used to create heatmaps for each scenario, as seen in figure X. The method used is Inverse Distance Weighting (IDW) with a power of 2 and radius of 30m. A Line-of-sight (LoS) check was implemented in order to reflect how readings on either side of an obstacle should not affect each other.

## 1) Hypothesis 4: Real-world usefulness and heatmap visualization: hyp and setup text

TABLE I

ESI RESULTS FOR THE REAL-WORLD EXPERIMENT. 1) NO CHANGES, 2) LIGHT CHANGES, 3) MODERATE CHANGES, 4) SIGNIFICANT CHANGES. ROWS MARKED WITH \* HAVE UNITS [mm] AND [°], RESPECTIVELY.

| Scenario         | 1)   |     | 2)   |     | 3)   |     | 4)   |     |
|------------------|------|-----|------|-----|------|-----|------|-----|
| * Pose RMSE      | 22.4 | 2.4 | 17.5 | 2.1 | 21.1 | 2.4 | N/A  | N/A |
| * Pose Std. dev. | 25.1 | 2.7 | 19.5 | 1.1 | 20.5 | 1.0 | N/A  | N/A |
| ESI mean         | 0.94 |     | 0.64 |     | 0.46 |     | 0.22 |     |
| ESI std. dev.    | 0.04 |     | 0.12 |     | 0.10 |     | 0.09 |     |



Fig. 5. Photo of a MiR100 moving through the production hall towards the finish waypoint.

2) **Results:** The test data reveals that a large percentage of the emitted rays are never returned, and so they report max range. This is why only those beams that return a value within min and max range are considered valid: A raytraced beam that reports max range due to attenuation would wrongly count all objects on the line as removed.

To test the reliability of AMCL, a Levene’s test of equality of variances on the position errors (Euclidean distance from goal) for scenarios 1-3 shows no significant differences in variance ( $p = 0.8153$ , center=median). A one-way ANOVA test shows no significant differences in mean position error ( $p = 0.7046$ ). These tests show that, in this experiment, for no, light and moderate changes, AMCL is able to consistently maintain a low pose error. However, when the changes became severe, AMCL failed in every run, and the robot was unable to reach the goal. This corresponded with a low mean ESI score of 0.22 for scenario 4.

The heatmap clearly shows how the ESI reflects the intensity of local changes across the hall in the different scenarios.

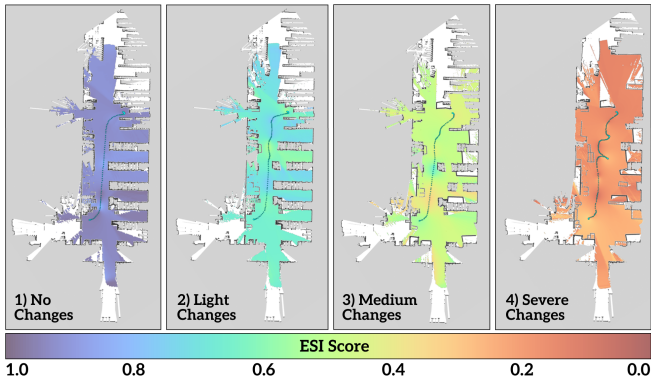


Fig. 6. ESI-based Heatmaps for each of the four scenarios in the same section of the hall.

## V. CONCLUSIONS

...

## VI. LIMITATIONS AND FUTURE WORK

...

## APPENDIX

- Raw position data for the real-world experiment -

## ACKNOWLEDGMENT

## REFERENCES

- [1] M. Young, *The Technical Writer's Handbook*. Mill Valley, CA: University Science, 1989.
- [2] J. Doe, A. Smith, and B. Johnson, "Lorem ipsum dolor sit amet, consectetur adipiscing elit," in *Proc. IEEE Int. Conf. Robotics Automat.*, 2020, pp. 123–128.
- [3] C. Williams, D. Brown, and E. Davis, "Sed do eiusmod tempor incididunt ut labore," *IEEE Trans. Robot.*, vol. 35, no. 4, pp. 456–467, Aug. 2019.
- [4] F. Miller, G. Wilson, and H. Taylor, "Ut enim ad minim veniam, quis nostrud exercitation," in *Proc. IEEE/RSJ Int. Conf. Intell. Robots Syst.*, 2021, pp. 234–241.
- [5] I. Anderson, J. Martinez, and K. Lee, "Ullamco laboris nisi ut aliquip ex ea commodo consequat," *IEEE Robot. Automat. Lett.*, vol. 6, no. 2, pp. 789–795, Apr. 2021.
- [6] L. Garcia, M. Rodriguez, and N. Patel, "Duis aute irure dolor in reprehenderit," in *Proc. IEEE Int. Conf. Robot. Automat.*, 2018, pp. 567–574.
- [7] O. Thompson, P. White, and Q. Harris, "In voluptate velit esse cillum dolore eu fugiat," *IEEE Trans. Automat. Sci. Eng.*, vol. 17, no. 3, pp. 1234–1245, Jul. 2020.
- [8] R. Clark, S. Lewis, and T. Walker, "Nulla pariat excepteur sint occaecat cupidatat," in *Proc. IEEE Conf. Decision Control*, 2019, pp. 345–352.
- [9] U. Young, V. Hall, and W. Allen, "Non proident, sunt in culpa qui officia deserunt," *IEEE Trans. Syst., Man, Cybern., Syst.*, vol. 50, no. 8, pp. 2345–2356, Aug. 2020.
- [10] X. King, Y. Wright, and Z. Scott, "Mollit anim id est laborum," in *Proc. IEEE Int. Conf. Robotics Automat.*, 2022, pp. 678–685.
- [11] A. Adams, B. Baker, and C. Carter, "Sed ut perspiciatis unde omnis iste natus error," *IEEE Robot. Automat. Mag.*, vol. 27, no. 2, pp. 89–97, Jun. 2020.
- [12] D. Evans, E. Foster, and F. Green, "Sit voluptatem accusantium doloremque laudantium," in *Proc. IEEE/RSJ Int. Conf. Intell. Robots Syst.*, 2020, pp. 456–463.
- [13] G. Hill, H. Jackson, and I. Jones, "Totam rem aperiam, eaque ipsa quae ab illo inventore," *IEEE Trans. Robot.*, vol. 36, no. 5, pp. 1234–1245, Oct. 2020.
- [14] J. Kelly, K. Lopez, and L. Moore, "Veritatis et quasi architecto beatae vitae dicta sunt," in *Proc. IEEE Int. Conf. Robot. Automat.*, 2021, pp. 789–796.
- [15] M. Nelson, N. Owens, and O. Parker, "Explicabo nemo enim ipsam voluptatem quia voluptas," *IEEE Robot. Automat. Lett.*, vol. 5, no. 4, pp. 2345–2352, Oct. 2020.
- [16] P. Quinn, R. Reed, and S. Ross, "Sit aspernatur aut odit aut fugit, sed quia consequuntur," in *Proc. IEEE Conf. Decision Control*, 2020, pp. 567–574.
- [17] T. Stewart, U. Turner, and V. Underwood, "Magni dolores eos qui ratione voluptatem sequi nesciunt," *IEEE Trans. Automat. Sci. Eng.*, vol. 18, no. 2, pp. 3456–3467, Apr. 2021.
- [18] W. Vance, X. Vega, and Y. Vincent, "Neque porro quisquam est, qui dolorem ipsum quia dolor sit amet," in *Proc. IEEE Int. Conf. Robotics Automat.*, 2019, pp. 890–897.
- [19] Z. Ward, A. Watson, and B. Webb, "Consectetur, adipisci velit, sed quia non numquam eius modi tempora," *IEEE Trans. Syst., Man, Cybern., Syst.*, vol. 51, no. 6, pp. 4567–4578, Jun. 2021.
- [20] C. West, D. Wood, and E. Wright, "Incididunt ut labore et dolore magnam aliquam quaerat voluptatem," in *Proc. IEEE/RSJ Int. Conf. Intell. Robots Syst.*, 2021, pp. 123–130.
- [21] F. Yang, G. Young, and H. Zhang, "Ut enim ad minima veniam, quis nostrum exercitationem ullam corporis," *IEEE Robot. Automat. Mag.*, vol. 28, no. 3, pp. 123–134, Sep. 2021.
- [22] I. Zhao, J. Zhou, and K. Zhu, "Suscipit laboriosam, nisi ut aliquid ex ea commodi consequatur," in *Proc. IEEE Int. Conf. Robot. Automat.*, 2020, pp. 234–241.
- [23] L. Abbott, M. Bell, and N. Cooper, "Quis autem vel eum iure reprehenderit qui in ea voluptate velit esse," *IEEE Trans. Robot.*, vol. 37, no. 1, pp. 5678–5689, Feb. 2021.
- [24] O. Davis, P. Edwards, and Q. Ellis, "Quam nihil molestiae consequatur, vel illum qui dolorem eum fugiat," in *Proc. IEEE Conf. Decision Control*, 2021, pp. 345–352.
- [25] R. Fisher, S. Ford, and T. Fox, "Quo voluptas nulla pariat at vero eos et accusamus," *IEEE Robot. Automat. Lett.*, vol. 6, no. 3, pp. 6789–6796, Jul. 2021.
- [26] U. Grant, V. Gray, and W. Green, "Et iusto odio dignissimos ducimus qui blanditiis praesentium," in *Proc. IEEE Int. Conf. Robotics Automat.*, 2021, pp. 456–463.
- [27] X. Hayes, Y. Hughes, and Z. Hunt, "Voluptatum deleniti atque corrupti quos dolores et quas molestias," *IEEE Trans. Automat. Sci. Eng.*, vol. 19, no. 1, pp. 7890–7901, Jan. 2022.
- [28] A. Ingram, B. Irwin, and C. Irwin, "Excepturi sint occaecati cupiditate non provident, similique sunt in culpa," in *Proc. IEEE/RSJ Int. Conf. Intell. Robots Syst.*, 2022, pp. 567–574.
- [29] D. Jenkins, E. Jensen, and F. Johnson, "Qui officia deserunt mollitia animi, id est laborum et dolorum fuga," *IEEE Trans. Syst., Man, Cybern., Syst.*, vol. 52, no. 4, pp. 2345–2356, Apr. 2022.
- [30] G. Klein, H. Knight, and I. Knox, "Et harum quidem rerum facilis est et expedita distinctio," in *Proc. IEEE Int. Conf. Robot. Automat.*, 2022, pp. 678–685.