

PETAL PUFFER

Long down-style coat. Clean channel-quilted front with a full-length snapped storm flap; the back, sides, sleeves and lower front are built from overlapping petal pods, after the ANIEZE Raven petals.

Style	P03-AW04 · Autumn–Winter (Round 5)
Sizes	Unisex XS–2XL, base M (fits chest 108 cm / 174 cm)
Colour	Matte black (colour options to follow)
Shell	Matte 40D recycled nylon taslan, downproof, PFC-free DWR
Fill	Recycled blowable cluster ≈480 g (M); down 90/10 as alternative
Closure	Two-way METAL #5 zip under an 8 cm storm flap, collar to hem, 9 + 1 snaps
Pods	≈49 filled leaves; back: 6 rows, 27 pods
Production	Sialkot, Pakistan · proto first

Status: P0 spec for the first proto. All measurements are designer estimates until the proto fitting.

FRONT

storm flap FULL length · 9 + 1 snaps · channels to HL, petals below




BACK

petal pods shingled like roof tiles · shoulder pods




LEFT SIDE

channels on the front, pods wrap from the side to the back

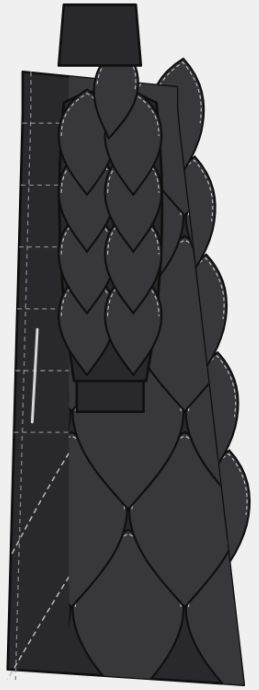


A · PETAL POD

How each pod is made and attached

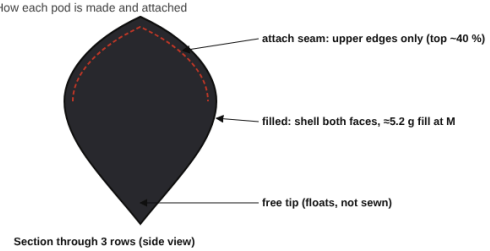

Section through 3 rows (side view)

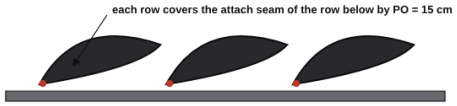


base: shell + lining, channel-quilted (warmth without the pods)

B · STORM FLAP + SNAPS

Centre-front closure


Horizontal section at a snap

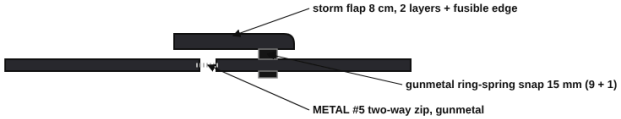

The flap runs the FULL length, collor to hem. No zip teeth visible outside.
Snap spacing SN = 13 cm (M); top snap on the collar tab. Zip guard + chin guard behind the zip.


C · CUFF

Balloon sleeve into band

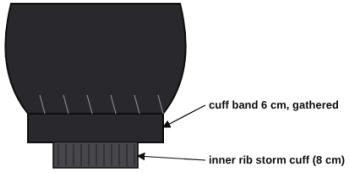


D · COLLAR + POCKET

Collar faced with brushed tricot; pocket bag lined

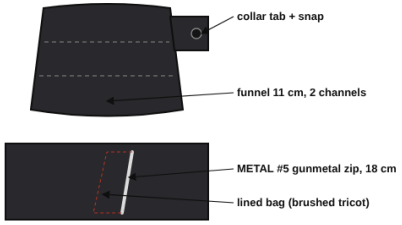

E · QUILTING

Front channels and the base under the pods

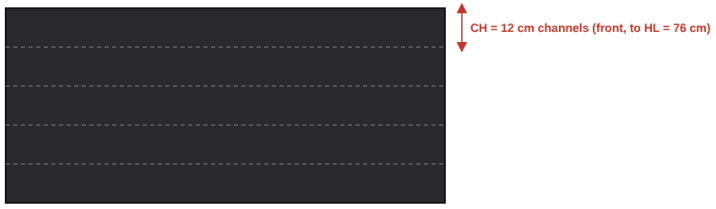


The same sewn-through channels continue under the pods on the back, sides and sleeves (lighter fill there).

F · STITCH + FINISH

- Seam allowance 1 cm · stitch length 3 mm on channels · bartack pocket ends and both ends of every pod attach seam.
- Pod attach order: hem row first, working up; back → sides → sleeves → shoulder pods last.
- Hem: clean finish, no drawcord. The two-way zip opens from the bottom for walking.
- Insulation: recycled blowable cluster recommended (no down line needed); down 90/10 as the alternative.
- Labels: woven neck label, size label, care/composition in the left side seam.

INSIDE VIEW · fronts opened (size M)

seen from the front · the wearer's LEFT front opens to the image RIGHT

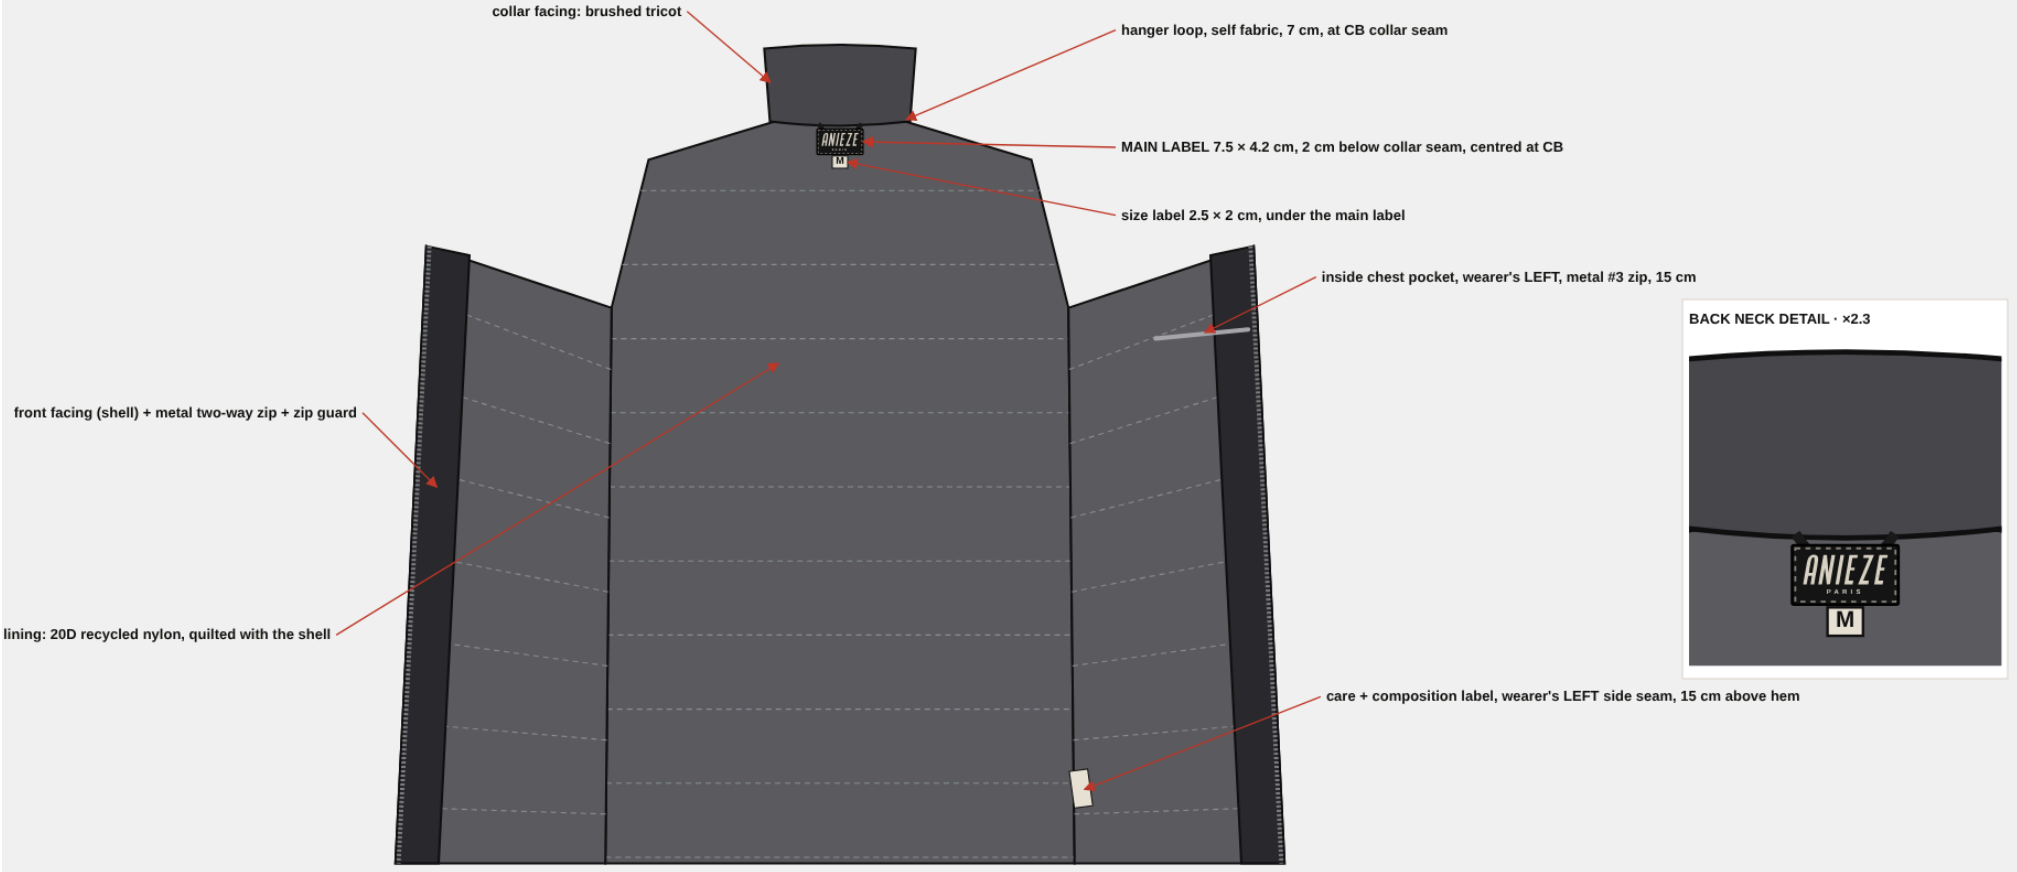

A · MAIN LABEL (inside back neck)




Woven damask, black ground, stone thread (matches shell/lining)
ANIEZE wordmark from the master vector · PARIS below at 22 % of the logo height
Safe margin 0.45 cm · end-fold, stitched on all 4 sides in black
Placement: centred at CB, top edge 2 cm below the collar seam, on the lining
Approved ANIEZE patch size (7.5 × 4.2 cm), from ANIEZE_PARIS_Back_Patch_Two_Sizes_CM.pdf

B · SIZE LABEL



Woven, stone ground, black size letter · 2.5 × 2 cm · sewn into the bottom seam of the main label

C · CARE + COMPOSITION LABEL

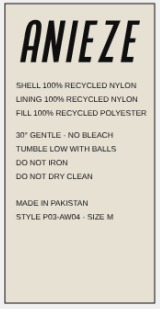

Printed satin, 3 × 6 cm (drawn 1.6× here), folded loop
Wearer's LEFT side seam, 15 cm above hem
Final care symbols per ISO 3758 once the fill supplier confirms washing

D · LOGO MASTER



Use only this vector (Drive: Logo black.svg)
No outlines, no effects, no redrawn letters

E · HANGER LOOP + PULLER




Hanger loop: self fabric, 7 cm finished, at CB collar seam
Zip pullers carry the ANIEZE wordmark (see Trims and hardware)


Logo from the ANIEZE master vector (Drive: Logo black.svg). Main label 7.5 × 4.2 cm per the approved patch spec. Never redraw or retype the wordmark.

div>

FRONT · points of measure

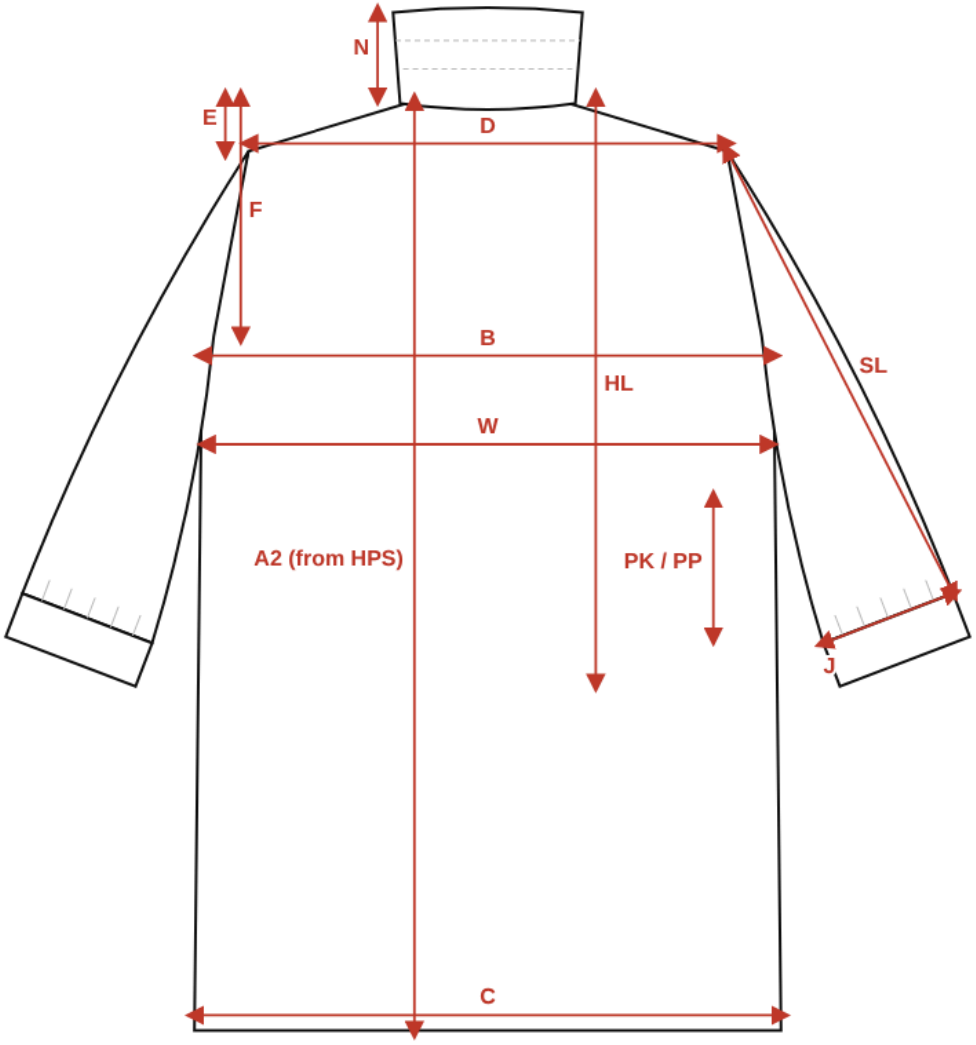

BACK

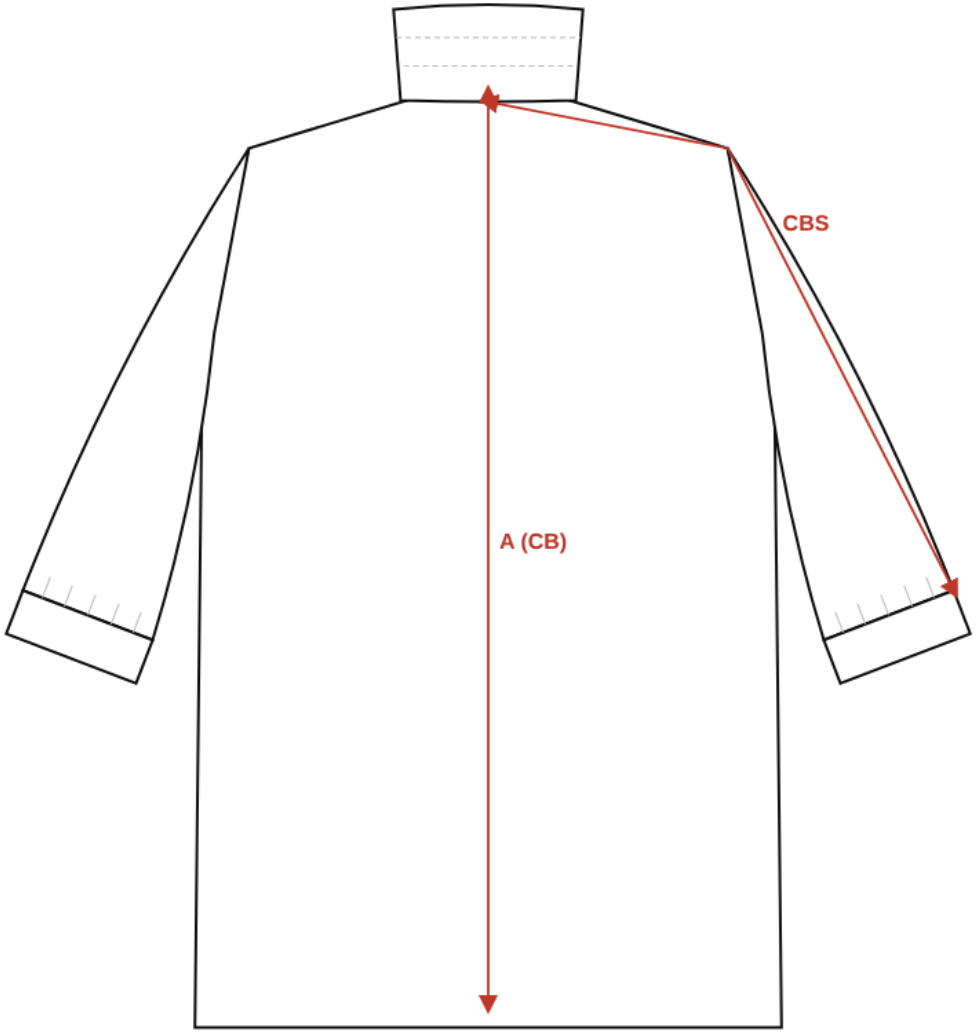





A · ZIP PULLERS (custom, die-cast)

Finish A gunmetal satin · finish B matte black e-coat · leaf shape · ANIEZE debossed · drawn at 7 × scale

Large: CF zip (2 pcs)



- Pull strength ≥ 70 N, smooth edges, no burrs
- Debossed ANIEZE logo (master vector) 0.3 mm deep, both faces
- Same finish lot as zips and snaps

Small: pocket + inside zips (3 pcs)



B · SNAP BUTTONS (ring-spring, 15 mm)

Brass, nickel-free · A gunmetal satin / B matte black e-coat · 4 parts





- 10 sets: 9 on the storm flap (spacing SN = 13 cm at M) + 1 on the collar tab
- Fusible interfacing behind every cap and stud; holding strength ≥ 90 N
- Cap: smooth dome with a small debossed leaf (ANIEZE petal motif)

C · METAL ZIPS

All zips metal, black tape · teeth and sliders A gunmetal / B matte black · ANIEZE leaf puller on every slider

Centre front: #5 metal, TWO-WAY open-end, 2 auto-lock sliders, metal stops · length ZF = 110 cm (M)



Hand pockets (2): #5 metal closed-end · 18 cm (19 cm XL–2XL)



Inside chest (1): #3 metal closed-end · 15 cm



Checks: nickel-free (EN 1811) · REACH · 24 h salt spray (ISO 9227) · approve one hardware card per finish (A gunmetal, B matte black) before bulk; B also passes an e-coat abrasion test.





Same parts as option A, finish only changes. One finish per garment; approve one hardware card per finish.

Item	Specification	Size	Finish	Qty	Where	Checks
Centre-front zip	Metal #5, two-way open-end (separating), 2 auto-lock sliders back to back, metal top and bottom stops	Teeth ≈6 mm wide, tape ≈32 mm, length ZF = 110 cm (M)	A: gunmetal satin · B: matte black e-coat; black tape	1	Centre front under the storm flap, collar to hem	Smooth run both sliders; separates and re-engages cleanly; slider lock holds
Hand pocket zips	Metal #5 closed-end, 1 auto-lock slider	18 cm (M), 19 cm XL–2XL	A: gunmetal · B: matte black; black tape	2	Side-entry pockets, top of opening PP below HPS	Bartacks at both ends; no puckering
Inside chest zip	Metal #3 closed-end	15 cm	A: gunmetal · B: matte black; black tape	1	Left lining, chest	Runs without catching the lining
Zip pullers	Custom die-cast metal, slim leaf shape with pointed tip, ANIEZE debossed lengthwise	Large 50 × 12 mm (CF), small 35 × 9 mm (pockets)	A: gunmetal satin · B: matte black e-coat	2 large + 3 small	On every slider	Pull strength ≥ 70 N; edges smooth, no burrs
Snaps	Ring-spring, 4 parts (cap, socket, stud, post), brass, domed cap with debossed leaf motif	15 mm cap	A: gunmetal satin · B: matte black e-coat	10 sets	9 on the storm flap (spacing SN), 1 on the collar tab. Orientation: CAP on the flap outer face, FEMALE SOCKET on the flap underside; MALE STUD on the coat body under the flap, POST inside the body	Interfacing behind every snap; holding strength ≥ 90 N
Inner zip guard + chin guard	Brushed tricot strip behind the CF zip, folded chin guard at the top	4 cm wide	Black	1	Inside, behind the CF zip	Metal never touches the skin at the chin

Two finish options, both metal: A = gunmetal satin, B = matte black e-coat (low sheen). One finish per colourway, never mixed on one garment; same shade lot across zips, pullers and snaps. All parts nickel-free (EN 1811), REACH compliant, 24 h salt-spray corrosion test (ISO 9227); for B also a rub/abrasion test on the e-coat so it does not chip to bright metal. Approve one hardware card per finish before bulk.

Code	Point of measure	How to measure	Tol	XS	S	M	L	XL	2XL
A	Back length from collar seam (CB)	Centre back, collar seam straight down to hem edge, laid flat	±1.5	115	116.5	118	119.5	121	123
A2	Front length from HPS	High point shoulder (collar seam at shoulder) straight down to hem, flap closed	±1.5	118	119.5	121	122.5	124	126
B	1/2 chest	Laid flat, closed, side to side 2.5 cm below armhole, over the fill (do not compress)	±1.5	70	72	74	76	78	81
W	1/2 waist	Laid flat, closed, 45 cm below HPS	±1.5	69	71	73	75	77	80
C	1/2 hem sweep	Laid flat, closed, straight across the hem edge	±2	72	74	76	78	80	83
D	Across shoulder	Shoulder seam point to shoulder seam point, straight across back (dropped shoulder)	±1	59	60.5	62	63.5	65	67
E	Shoulder drop	Vertical drop from HPS level to shoulder seam point	±0.5	7	7	7	7	7	7.3
F	Armhole depth from HPS	HPS straight down to underarm level	±1	29	30	31	32	33	34.2
SL	Sleeve length from shoulder seam	Shoulder seam point along the top of the sleeve to cuff edge	±1	58	59	60	61	62	63
CBS	CB sleeve length	Centre back neck, over the shoulder seam, down the sleeve to cuff edge	±1.5	87.5	89.25	91	92.75	94.5	96.5
I	1/2 bicep	Laid flat, 2.5 cm below armhole, perpendicular to sleeve centre	±1	25.2	26.1	27	27.9	28.8	30
J	1/2 outer cuff band	Laid flat at the outer cuff band edge (sleeve gathered into it)	±0.5	14.2	14.6	15	15.4	15.8	16.3
J2	1/2 inner rib cuff, relaxed	Inner knit storm cuff laid flat, relaxed	±0.5	7.9	8.2	8.5	8.8	9.1	9.5
CW	Outer cuff band height	Band seam to cuff edge	±0.3	6	6	6	6	6	6
N	Collar height at CB	Collar seam to top edge at centre back	±0.5	11	11	11	11	11	11.3
N2	Collar length at neck seam	Along the collar seam, end to end (closed collar, excluding the flap tab)	±1	47.6	48.8	50	51.2	52.4	53.9
N3	Collar length at top edge	Along the top edge, end to end	±1	51.6	52.8	54	55.2	56.4	57.9
SF	Storm flap width, finished	Flap fold to flap edge, perpendicular	±0.3	8	8	8	8	8	8
SN	Snap spacing on flap	Centre to centre, 9 snaps on the flap + 1 on the collar tab	±0.3	12.7	12.85	13	13.15	13.3	13.5
ZF	Centre-front zip length	Two-way zip, teeth length, bottom stop to top stop	±1	107	108.5	110	111.5	113	115
PK	Hand pocket opening	Zip teeth length (side-entry zip pocket)	±0.5	18	18	18	18	18	19
PP	Pocket position from HPS	HPS straight down to the top of the pocket opening	±1	50	51	52	53	54	55.2
CH	Front channel width, finished	Quilt line to quilt line on the front panels	±0.5	11.6	11.8	12	12.2	12.4	12.7
HL	Front channel zone depth	HPS down to the last front quilt line (petals start below)	±1	74	75	76	77	78	79.4
PW	Petal pod width (back row 3)	Widest point across one pod, laid flat	±0.8	20.8	21.4	22	22.6	23.2	24
PH	Petal pod height (back row 3)	Top tip to bottom tip of one leaf, laid flat	±1	32.4	33.2	34	34.8	35.6	36.6
PO	Petal overlap	How far each row covers the row below, measured at the pod centre	±0.5	14.4	14.7	15	15.3	15.6	16

Code	Point of measure	XS in	S in	M in	L in	XL in	2XL in
A	Back length from collar seam (CB)	45.28	45.87	46.46	47.05	47.64	48.43
A2	Front length from HPS	46.46	47.05	47.64	48.23	48.82	49.61
B	1/2 chest	27.56	28.35	29.13	29.92	30.71	31.89
W	1/2 waist	27.17	27.95	28.74	29.53	30.31	31.50
C	1/2 hem sweep	28.35	29.13	29.92	30.71	31.50	32.68
D	Across shoulder	23.23	23.82	24.41	25.00	25.59	26.38
E	Shoulder drop	2.76	2.76	2.76	2.76	2.76	2.87
F	Armhole depth from HPS	11.42	11.81	12.20	12.60	12.99	13.46
SL	Sleeve length from shoulder seam	22.83	23.23	23.62	24.02	24.41	24.80
CBS	CB sleeve length	34.45	35.14	35.83	36.52	37.20	37.99
I	1/2 bicep	9.92	10.28	10.63	10.98	11.34	11.81
J	1/2 outer cuff band	5.59	5.75	5.91	6.06	6.22	6.42
J2	1/2 inner rib cuff, relaxed	3.11	3.23	3.35	3.46	3.58	3.74
CW	Outer cuff band height	2.36	2.36	2.36	2.36	2.36	2.36
N	Collar height at CB	4.33	4.33	4.33	4.33	4.33	4.45
N2	Collar length at neck seam	18.74	19.21	19.69	20.16	20.63	21.22
N3	Collar length at top edge	20.31	20.79	21.26	21.73	22.20	22.80
SF	Storm flap width, finished	3.15	3.15	3.15	3.15	3.15	3.15
SN	Snap spacing on flap	5.00	5.06	5.12	5.18	5.24	5.31
ZF	Centre-front zip length	42.13	42.72	43.31	43.90	44.49	45.28
PK	Hand pocket opening	7.09	7.09	7.09	7.09	7.09	7.48
PP	Pocket position from HPS	19.69	20.08	20.47	20.87	21.26	21.73
CH	Front channel width, finished	4.57	4.65	4.72	4.80	4.88	5.00
HL	Front channel zone depth	29.13	29.53	29.92	30.31	30.71	31.26
PW	Petal pod width (back row 3)	8.19	8.43	8.66	8.90	9.13	9.45
PH	Petal pod height (back row 3)	12.76	13.07	13.39	13.70	14.02	14.41
PO	Petal overlap	5.67	5.79	5.91	6.02	6.14	6.30

Item	Description	Weight / size	Colour	Qty (M)
Shell	Matte 40D recycled nylon taslan, peach-finish, downproof (calendered), PFC-free DWR (C0)	~70 g/m², 145 cm wide	Matte black	≈3.6 m (M)
Petal pods (both faces)	Same as shell		Matte black	≈2.4 m (M)
Lining	20D recycled nylon, downproof, soft hand	~45 g/m², 145 cm wide	Black	≈3.4 m (M)
Insulation · recommended	Recycled polyester blowable cluster (down-like), e.g. PrimaLoft ThermoPlume or equal	650 FP-equivalent	White	≈480 g (M), see fill chart
Insulation · alternative	RDS-certified duck down 90/10, 650 FP (needs a down-blowing line)			≈400 g (M)
Collar facing	Brushed black nylon tricot (chin comfort)	~110 g/m²	Black	0.25 m
Inner storm cuffs	1×1 rib knit, nylon/elastane	8 cm finished	Black	2 pcs
CF zip	METAL #5 two-way open-end (separating) zip, gunmetal teeth, black tape, 2 auto-lock sliders, metal top/bottom stops (YKK Metal or equal)	length = ZF	Gunmetal (A) or matte black (B) / black tape	1
Pocket zips	METAL #5 closed-end zip, gunmetal teeth, black tape, 1 auto-lock slider	18 cm	Gunmetal (A) or matte black (B) / black tape	2
Inside chest pocket zip	METAL #3 closed-end zip, gunmetal teeth, black tape	15 cm	Gunmetal (A) or matte black (B) / black tape	1
Zip pullers	Custom die-cast metal puller, slim leaf shape, ANIEZE debossed; large on CF sliders, small on pocket sliders	CF 50 × 12 mm, pocket 35 × 9 mm	Gunmetal (A) or matte black (B)	2 large + 3 small
Inner zip guard	Black brushed tricot zip guard behind the CF zip, with chin guard at the top (stops cold metal touching the chin)	4 cm wide	Black	1
Snaps	Ring-spring snaps 15 mm, brass, nickel-free; domed cap with debossed leaf motif; 4 parts: cap, socket, stud, post (Prym / YKK or equal)	15 mm cap	Gunmetal (A) or matte black (B)	10 sets (9 flap + 1 collar)
Interfacing	Lightweight fusible woven, for flap edge and snap points		Black	as needed
Thread	Polyester core-spun Tex 40, matching		Black	
Main label	ANIEZE woven damask label, black ground, stone thread, real logo vector + PARIS, end-fold, 2 cm below CB collar seam	7.5 × 4.2 cm	Black / stone	1
Size label	Woven, stone ground, black letter, sewn into the bottom seam of the main label	2.5 × 2 cm	Stone / black	1

Care + composition label	Printed satin, folded loop, ANIEZE logo, wearer's LEFT side seam 15 cm above hem	3 × 6 cm	Stone / black	1	

Fill weight (g)

Zone	XS	S	M	L	XL	2XL
Front channels (both fronts)	86	90	95	100	105	112
Back + side base channels (under the pods)	67	70	74	78	81	87
Sleeves base channels	54	57	60	63	66	71
Collar	14	14	15	16	16	18
Petal pods (≈49 pods × ≈4.8 g)	212	224	236	248	260	278
Total	**432**	**456**	**480**	**504**	**528**	**565**

Construction

1. Base shell: the whole coat is a quilted base (shell + lining, sewn-through). Front panels: 12 cm horizontal channels down to line HL, then chevron quilt lines running from the side seam down to the storm flap (leaf shapes, sewn-through, no loose pods on the front). The back, sides and sleeves are covered by petal pods; their tips show at the side seams in the front view.
2. Petal pods: each pod is a separate filled leaf shape (shell both faces, filled, closed). It is sewn to the base ONLY along its top curve (the upper 40 % of its edge, see the detail). The lower tip floats free. Rows overlap like roof tiles: each row covers the row below by PO, so rain runs off.
3. Sewing order for pods: start at the hem row and work up, so each new row covers the attach seam of the row below. Back (first row = 2 leaves directly under the collar, either side of CB), then sides, then sleeves, then the two shoulder wings last.
4. Shoulder wings: one small pointed leaf (≈19 × 8.5 cm at M) at each shoulder point, attached at its root on the shoulder seam, tip pointing outward almost horizontally.
5. Closure: METAL #5 two-way zip (gunmetal) at centre front, fully covered by an 8 cm storm flap that runs the FULL length from the collar to the hem, with a brushed-tricot zip guard and chin guard behind it. The flap closes with 9 gunmetal snaps at spacing SN, plus 1 on the collar tab. No zip teeth visible on the outside when closed.
6. Collar: 11 cm funnel stand, 2 channels, faced with brushed tricot inside; the collar tab extends from the flap and snaps closed.
7. Pockets: two side-entry hand pockets with METAL #5 gunmetal zips set in the front panel near the side seam (opening PK, top at PP), lined bags in brushed tricot. One inside chest pocket with a METAL #3 zip on the left lining. All sliders carry the ANIEZE leaf puller.
8. Cuffs: the sleeve is gathered into a 6 cm outer cuff band; an inner rib storm cuff is sewn inside the band.
9. Hem: clean, no drawcord. The two-way zip opens from the bottom for walking room.
10. Seam allowance 1 cm; channel stitching 3 mm stitch length; bartack the pocket ends and the top of each pod attach seam.