

Software Engineering Summer Semester 2016 Schupp/Kamph/Marrone 1 June 2016

CAT – Compilation and Testing

Elevator Logic

Deadline: 20 June 2016, 12:59 CEST

1 CAT

CAT is a short term hands-on programming project that will be carried out in small groups. It focuses on two different skills necessary during software development: The first skill is the actual software creation process, i.e., programming a software component that fulfills a certain task under specific requirements. For this project the programming language of choice is C++. The second skill is the development of effective tests and their evaluation.

To make the project more interesting all participating groups will compete with their software solutions and tests: not only will your software be subject to evaluation by a test suite created by us but also all test suites submitted by your fellow students. Thus, your two main goals during CAT are:

- Creating a robust software solution that passes most tests
- Developing an effective test suite that finds most bugs

All files are to be handed in via Stud.IP using the CAT plugin. It provides means to upload your source code and tests and evaluates the uploaded files. Your results can be seen shortly after an upload.

2 Task

This semester's CAT task is the creation of a generic controller logic for different elevator systems. Thus, you are not only responsible for enforcing safety requirements imposed by the elevator configuration but also to ensure passengers reach their destination floors in a timely manner. Your logic should be completely encapsulated in a C++ class named ElevatorLogic. The related files, ElevatorLogic.h and ElevatorLogic.cpp, are the only source code files you need to submit.

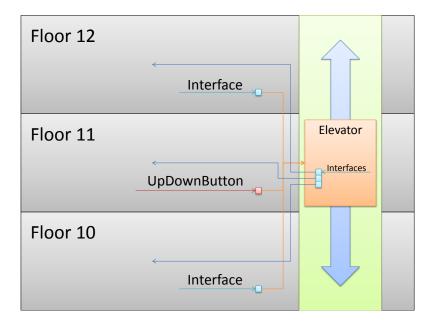


Figure 1: Example Elevator System

3 Elevator Systems

An elevator system consists of several objects, which interact by sending and receiving events. The system is timed and thus every event has a point in time when it is processed. The following components are available to define an elevator system:

Interface An Interface object represents an interface that a passenger may interact with.

UpDownButton An UpDownButton represents an interface that allows a passenger to indicate whether he or she desires to ascend or descend when calling an elevator.

Floor A Floor object represents a certain floor in a building. All Floor objects are ordered and can be imagined as a single tower of floors of a building. Every Floor object has a number of Interface and/or UpDownButton objects that are used to call elevators to the floor.

Elevator An Elevator object represents an elevator in the system. It has a number of Interface objects that can be interacted with to instruct the elevator to go to a particular floor.

As an example Figure 1 shows a system with 3 Floor objects, 1 Elevator and the objects to interact with the elevator.

More detailed information on the components, messages and functions can be found in Section 6.

4 Writing your ElevatorLogic

In this project one of your tasks is creating the ElevatorLogic class, which should react to user requests and operate the elevators accordingly. To achieve this task you need to react to messages and send messages on your own to communicate with the other system components. In the following the example the ElevatorLogic.cpp file you received with this PDF is explained in detail to get you started.

4.1 Reacting to Events

The first step to reacting to events is defining functions that should be called when a certain event type is received. An event handler function always has the following function signature:

```
void Class::Function(Environment &env, const Event &e)
```

where Class is the name of the receiving class, and Function is a freely chosen name for the event handler function. By convention message handlers are private class methods and their names indicate which event type is handled, e.g., HandleNotify.

In the example we react to four different message types: Interface:: Notify, Elevator::Stopped, Elevator::Opened, and Elevator::Closed. Thus, four different event handlers functions are present:

- void ElevatorLogic::HandleNotify(...)
- void ElevatorLogic::HandleStopped(...)
- void ElevatorLogic::HandleOpened(...)
- void ElevatorLogic::HandleClosed(...)

The next step is registering the functions in the event system so that they are actually called when processing an event of the correct type. The registering should be done in the initialization function

```
void Class::Initialize(Environment &env),
```

which every component in the event system has. Source Code 1 shows the example initialization function, which registers the newly defined event handlers at the Environment object. The RegisterEventHandler function of the Environment object has three parameters: the event type to react to, the object, whose method should be called, and the method, which should be called.

After the registration the four event handler functions are ready and are called when a matching event occurs. Note that if at any time you need a handler that is called for every event, not taking the event type into account, you may register an event handler for the special event type Environment::All. For a summary of all the events in the elevator system please refer to the reference in Section 6.

Source Code 1: Registering Event Handlers during initialization

4.2 Processing Events

Continuing the example we assume the following scenario that should be handled by the example logic:

- a) A person requests an elevator. The elevator is already at the correct floor.
- b) The elevator opens its doors, the person enters and instructs the elevator to ascend to the next floor.
- c) The elevator doors close, the elevator ascends, stops at the floor above, and opens its doors. The person exits.
- d) The elevator closes its doors.

Therefore, the first task the ElevatorLogic must fulfill is opening the doors when the person calls the elevator. Source Code 2 shows the source code that handles a notification from an Interface object. In line 3 we obtain the Interface object that sent the message. In line 4 and 5 we ensure that the Interface actually notifies an Elevator object. Note that we also receive an Interface::Notify event when a person instructs an elevator to go to a certain floor. Then, however, the targeted objects are floors. In line 6 we then obtain the Elevator object that should open its doors and send an Elevator::Open event referencing the Elevator object. The four parameters of the SendEvent method of the Environment object are the event type, the delay when the message should be processed, the object that issued the event, and a reference to a different object. The reference to another component may be omitted if none is necessary. Also an additional fifth string parameter can be specified to send arbitrary data. In this case, the method call, thus, lets us (this) send an Elevator:: Open event that should be processed now (0) and that is referencing the Elevator object ele.

The remaining example source code has no interaction with the passenger anymore. We merely react to the elevator's status events:

• When the elevator doors have finished opening, we send an Elevator:: Close command to close the doors 4 time units later.

```
void ElevatorLogic::HandleNotify(Environment &env, const Event &e)
{
    Interface *interf = static_cast<Interface*>(e.GetSender());
    Loadable *loadable = interf->GetLoadable(0);
    if (loadable->GetType() == "Elevator") {
        Elevator *ele = static_cast<Elevator*>(loadable);
        env.SendEvent("Elevator::Open", 0, this, ele);
    }
}
```

Source Code 2: Opening the doors when called

```
1 Floor { 10 11 0 4 1 40 }
Floor { 11 0 10 4 1 40 }
Interface { 40 1 20 }

Elevator { 20 1 10 11 2 30 31 }
Interface { 30 1 10 }
Interface { 31 1 11 }
Person { 50 11 10 10 5 0 }
```

Test Case 1: Example Scenario

- When the elevator doors have finished closing, we instruct the elevator to ascend for 4 time units by sending an Elevator::Up command and following it up with a Elevator::Stop command 4 time units later. Those messages are only sent if we have not yet moved the elevator to prevent an infinite loop.
- When the elevator stops, we instruct it to open its doors by sending an Elevator::Open command.

This small example logic is already capable of handling the previously defined scenario. Obviously, it still has many flaws, but you surely will be able to fix those and handle many more scenarios.

5 Writing a Test Case

A test case in the elevator scenario needs to define the elevator system to operate, the persons interacting with the elevator system, and, optionally, non-deterministic events, such as malfunctions of elevators.

A test case is a plain text file that specifies all of those components. As an example, Test Case 1 specifies the previously introduced scenario. At first the two floors are defined using a Floor specification:

Here Floor 10 and 11 are defined where Floor 10 is above Floor 11. Both floors have a height of 4 and a single interface that is used to call the elevator: Interface 40. This interface is then defined using a Interface specification:

This interface only notifies a single object: Elevator 40. Note that an interface can not only contain references to elevators but also to floors. This is used later in the example test case to specify the elevator. The format for an elevator specification is

In the test case an elevator with a speed of 1 distance units per time unit that can carry at maximum 10 weight units is specified. Initially, the elevator is located at Floor 11 and the elevator has two interfaces, Interface 30 and Interface 31, to interact with it. Those interfaces are specified next and each of them references the floor the elevator should go to. With these specifications the elevator system is completely defined.

Next, the person interacting with the system is defined using a person specification:

```
Person { <ID> <ID of starting floor>
      <ID of destination floor> <give up delay>
      <weight> <start time> }
```

The person in this scenario starts on Floor 11 and wants to ascend to Floor 10. The person is willing to wait 10 time units for an elevator to arrive and weights 5 weight units. Furthermore, the person starts interacting with the elevator system at time 0, i.e., directly at the beginning of the simulation.

In this scenario no non-deterministic events such as elevator malfunctions are specified. Please refer to Section 6 for a complete reference on objects, events, and specifications.

6 Object Reference

In this section first all the objects part of the general event system are introduced. Then all objects part of the elevator system are presented in detail.

6.1 Environment

Description The Environment object controls the event system. It executes the event queue and allows sending and receiving events.

```
Super Class Loadable
```

Methods

```
int SendEvent(const std::string &type, int delay,
EventHandler *src, EventHandler *tgt, const
std::string &data)
```

Sends an event of the given type after the given delay where src is the sending EventHandler. The parameters tgt and data are optional. They are used to pass an EventHandler object and/or arbitrary data along with the event. The return value is an event ID that may be used to cancel an event if it was not executed yet.

bool CancelEvent(int id)

Cancels the event with the given id in case it has not yet been executed. Only useful if an event was sent with a delay.

int GetClock() const

Returns the current logical time in the event system.

```
void RegisterEventHandler(const
std::string &type, EventHandler *obj, void
```

```
(EventHandler::*fnc)(Environment&, const Event&))
```

Registers the function fnc of the object obj as a event handler that should be called whenever an event of the given type is processed.

6.2 Event

Description The Event object represents a single event in the event system.

Super Class Loadable

Methods

```
const std::string &GetEvent() const
```

Returns the event type of the event.

int GetTime() const

Returns the time this event should be processed.

int GetId() const

Returns the ID of this event.

EventHandler *GetSender() const

Returns a reference to the EventHandler object that sent this event.

EventHandler *GetEventHandler() const

Returns a reference to the passed EventHandler object if it was specified.

const std::string &GetData() const

Returns the arbitrary data string if any was specified.

Test Declaration

```
Event { <type> <time> <ID of sender>
     <ID of passed entity> (data string) }
```

<type> The type of this event. Refer to the other objects' references to see which events are permitted in a test declaration.

<time> The absolute time when this event should be processed.

<ID of sender> The ID of the entity that sends this event.

<ID of passed entity> The ID of a an entity to pass along with the event. Specify 0 for none.

(data string) An optional data string to pass along with the event.

6.3 EventHandler

Description The EventHandler class represents an object in the event system that may send and receive events.

Super Class None

Methods

bool ForMe(const Event &e) const

Checks whether the given event is for the EventHandler object, i.e., checks if e.GetEventHandler() is equal to this.

bool FromMe(const Event &e) const

Checks whether the given event is from the EventHandler object, i.e., checks if e.GetSender() is equal to this.

const std::string &GetName() const

Returns the name of the EventHandler object.

6.4 Loadable

Description The Loadable object represents an object that may be loaded from a test file in the event system.

Super Class None

Methods

```
int GetId() const
```

Returns the unique ID of this Loadable object.

const std::string &GetType() const

Returns the type of this Loadable object.

6.5 Entity

Description The Entity object represents an entity in the event system, i.e., a loadable object that takes part in the event system by sending and/or receiving events.

Super Class Loadable, EventHandler

6.6 Floor

Description The Floor object represents a single floor in the elevator system. It has a number of Interface objects that should allow a Person object to call one or more elevators to the floor.

Super Class Loadable

Methods

```
bool HasElevator(Elevator *ele) const
```

Checks whether the given elevator stops on this floor.

```
bool IsAbove(Floor *floor) const
```

Checks whether the given floor is above this floor.

```
bool IsBelow(Floor *floor) const
```

Checks whether the given floor is below this floor.

```
int GetHeight() const
```

Returns the height of this floor.

```
int GetInterfaceCount() const
```

Returns the number of Interface objects of this floor.

Interface *GetInterface(int n) const

Returns the Interface object with the given index.

Outgoing Events

None

Incoming Events

None

Test Declaration

<ID> A unique ID that refers to this floor.

- <ID of floor below> The ID of the floor directly below this floor. Specify 0 if this is the bottom floor.
- **ID** of floor above> The ID of the floor directly above this floor. Specify 0 if this is the top floor.
- **<height>** The height of this floor in distance units.
- <number of interfaces> The number of Interface objects of
 this floor.
- d interface IDs> The IDs of the Interface objects for
 this floor separated by spaces.

6.7 Elevator

Description The Elevator object represents an elevator in the elevator system. It moves along its elevator shaft when instructed and updates its status accordingly.

Super Class Entity

Invariants

These are requirements your elevator controller should try to meet.

- An elevator should only open its doors when it is not moving.
- An elevator should only open its doors when it is in the center of a floor.
- An elevator should not move when it is malfunctioning.
- An elevator should not move when its doors are open.
- An elevator should not move when it is overloaded.
- An elevator should not move beyond its top and bottom floors.
- An elevator should only beep when it is overloaded.
- An elevator should only beep when its doors are open.
- An elevator should not close its doors while it is beeping.

Methods

bool HasFloor(Floor *floor) const

Checks whether this elevator has an exit on the passed floor.

bool IsLowestFloor(Floor *floor) const

Checks whether the passed floor is the lowest floor this elevator can stop at.

bool IsHighestFloor(Floor *floor) const

Checks whether the passed floor is the highest floor this elevator can stop at.

bool IsOpen() const

Returns true if the doors are open and false otherwise.

int GetSpeed() const

Returns the speed of this elevator.

int GetMaxLoad() const

Returns the maximum load this elevator may carry.

Floor *GetCurrentFloor() const

Returns the floor this elevator is currently at.

double GetPosition() const

Returns the position of this elevator within the current floor. This is a value in the range [0,1] where 0 indicates the elevator is at the bottom of the current floor and 1 indicates the elevator is at the top of the floor, i.e., has traveled the complete height of the current floor.

Movement GetState() const

Returns the current state of this elevator.

Movement is a public enum of Elevator:

Idle The elevator is currently not moving.

Up The elevator is currently ascending.

Down The elevator is currently descending.

Malfunction The elevator is malfunctioning.

int GetInterfaceCount() const

Returns the number of interfaces this elevator has.

Interface *GetInterface(int n) const

Returns the Interface object with the given index.

Outgoing Events

GetSender() of the Event object references the Elevator object.

Elevator::Moving Sent when the elevator starts to move.

Elevator::Stopped Sent when the elevator stops moving.

Elevator::Opening Sent when the elevator starts opening its doors.

Elevator::Opened Sent when the elevator finishes opening its doors.

Elevator::Closing Sent when the elevator starts closing its doors.

Elevator::Closed Sent when the elevator finishes closing its doors.

Elevator::Beeping Sent when the elevator starts beeping.

Elevator::Beeped Sent when the elevator stops beeping.

Elevator::Malfunction Sent when the elevator is malfunctioning. This message may be specified in an **Event** in a test declaration.

Elevator::Fixed Sent when the elevator is no longer malfunctioning. This message may be specified in an Event in a test declaration.

Incoming Events

GetEventHandler() of the Event object must reference the elevator to instruct.

Elevator::Up Instructs the elevator to begin ascending.

Elevator::Down Instructs the elevator to begin descending.

Elevator::Stop Instructs the elevator to stop moving.

Elevator::Open Instructs the elevator to open its doors.

Elevator::Close Instructs the elevator to close its doors.

Elevator::Beep Instructs the elevator to start beeping.

Elevator::StopBeep Instructs the elevator to stop beeping.

Test Declaration

<ID> A unique ID that refers to this elevator.

<speed> The speed of this elevator in distance units per time unit.

<maximum load> The maximum load this elevator can support in
 weight units.

<ID of starting floor> The ID of the floor where this elevator
is initially located.

<number of interface> The number of Interface objects this
elevator has.

d interface IDs> The IDs of the Interface objects for this elevator separated by spaces.

6.8 Interface

Description The Interface object represents an interface in the elevator system. It can be interacted with and should notify all the Loadable objects referenced by it.

Super Class Entity

Methods

```
int GetLoadableCount() const
```

Returns the number of Loadable objects of this interface.

Loadable *GetLoadable(int n) const

Returns the Loadable object with the given index.

bool HasLoadable(Loadable *e) const

Checks whether the passed Loadable object is referenced by this interface.

Outgoing Events

GetSender() of the Event object references the Interface object.

Interface::Notify Sent when the interface was interacted with.
 GetEventHandler() of the Event object returns the entity
 that interacted with the interface.

Incoming Events

GetEventHandler() of the Event object must reference the interface to interact with.

Interface::Interact Interacts with the interface.

Test Declaration

```
Interface { <ID> <number of loadables>
     f loadable IDs> }
```

<ID> A unique ID that refers to this interface.

<number of loadables> The number of Loadable objects this
interface references.

dist of loadable IDs> The IDs of the Loadable objects this interface references separated by spaces.

6.9 UpDownButton

Description The UpDownButton object is an Interface object that allows a person to express the direction the elevator should move after the person enters an elevator.

Super Class Interface

Methods

None

Outgoing Events

GetSender() of the Event object references the Person object.

UpDownButton::Decide Sent when an entity interacts with this UpDownButton object. GetEventHandler() of the Event object returns the event handler that interacted with the button.

Interface::Notify Sent when an entity decides on a direction.
GetEventHandler() of the Event object returns the entity
that interacted with the interface. GetData() of the Event
object returns either Up or Down depending on the decision.

Incoming Events

GetEventHandler() of the Event object must reference the UpDownButton object to interact with.

UpDownButton::Up Instructs the UpDownButton to relay that the interacting entity wants to ascend.

UpDownButton::Down Instructs the UpDownButton to relay that
 the interacting entity wants to descend.

Test Declaration

<ID> A unique ID that refers to this UpDownButton object.

<number of loadables> The number of Loadable objects this
button references.

t of loadable IDs> The IDs of the Loadable objects this button references separated by spaces.

6.10 Person

Description The Person object represents a person in the elevator system. A person autonomously calls elevators to floors it currently is on in an attempt to get to its desired destination floor. It will enter and exit elevators it called and instruct the elevator to go to certain floors by interacting with the Interface objects. If an elevator starts beeping persons inside the elevator will exit an try to resolve the overloading problem.

Super Class Entity

Invariants

These are requirements your elevator controller should try to meet.

 A person should not have to wait longer than his or her maximum wait time for an elevator to arrive.

Methods

Floor *GetCurrentFloor() const

Returns the floor the person is currently on. Not valid when the person is in an elevator.

Floor *GetFinalFloor() const

Returns the desired destination floor of the person.

int GetGiveUpTime() const

Returns the duration the person is willing to wait for an elevator.

int GetWeight() const

Returns the weight of the person in weight units.

Elevator *GetCurrentElevator() const

Returns the elevator this person is currently riding or nullptr if not in an elevator.

Outgoing Events

GetSender() of the Event object references the Person object.

- Person::Entering Sent when the person starts entering an elevator. GetEventHandler() of the Event object returns the Elevator object.
- Person::Entered Sent when the person finishes entering an elevator. GetEventHandler() of the Event object returns the Elevator object.
- Person::Exiting Sent when the person starts exiting an elevator. GetEventHandler() of the Event object returns the Elevator object.
- Person::Exited Sent when the person finishes exiting an elevator. GetEventHandler() of the Event object returns the Elevator object.
- **Person::Canceled** Sent when the person aborts its current entering or exiting acting.

Incoming Events

None

Test Declaration

```
Person { <ID> <ID of starting floor>
      <ID of destination floor> <give up delay>
      <weight> <start time> }
```

<ID> A unique ID that refers to this person.

- <ID of starting floor> The ID of the floor this person starts at.
- <ID of destination floor> The ID of the desired destination floor.
- <give up delay> The time the person is willing to wait for an
 elevator in time units.
- <weight> The weight of the person in weight units.
- <start time> The time when this person starts interacting with
 the elevator system.

7 Notes

7.1 Compilation

The C++ source code is written according to the C++0x standard. To successfully compile the source code, in GCC/G++ you need to pass two command-line arguments to the compiler:

- -D__GXX_EXPERIMENTAL_CXXOX__
- -std=c++0x

On other compilers the necessary settings are probably different. Please see your compiler manual on whether or not C++0x is supported and how to enable it. A Makefile for GCC/G++ to compile the example source code is supplied.

7.2 Standard Library

The C++ standard library may come in handy during development of your ElevatorLogic class. Especially the std::map, std::set, and std::vector classes are useful to store status information. For example, you may need to track the current load of elevators. Then a std::map<Elevator*, int> allows you to create a lookup table for the load. See a reference of the standard library for more information, e.g., http://www.cplusplus.com/reference/.