
Technical Drawing & Component Specifications

Allsky

v1.0

July 2025



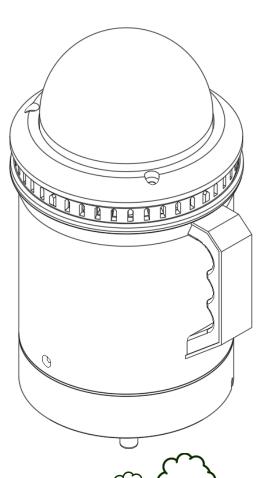




Contents


Electrical Schematic	2
Power Harness	4
Button Harness	5
SHT31 Harness	6
Dimensions	7
Functions	8
Components	9
CS-Mount Lens	9
Characteristic	9
Acrylic Dome	10
Jack plug (female)	11
Power Switch (3-9v)	12
Raspberry Pi5 & Active Cooling Module	13
Waterproof USB-C Pass-thru (only the core section required)	14
Ethernet Port Pass-Thru	14
SHT31 Humidity and Temperature Sensor	15
1/4-20 Tripod Threaded Inserts	16
M3 Threaded Inserts	16
Piezo Buzzer	17
RTC External Battery	17




Electrical Schematic

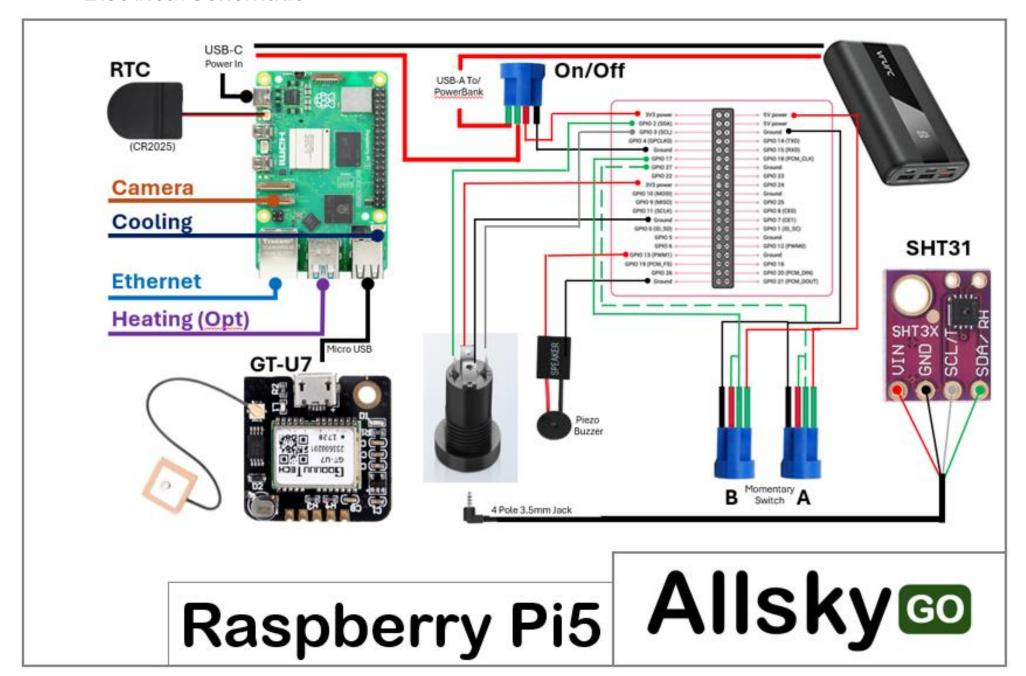


Power Harness

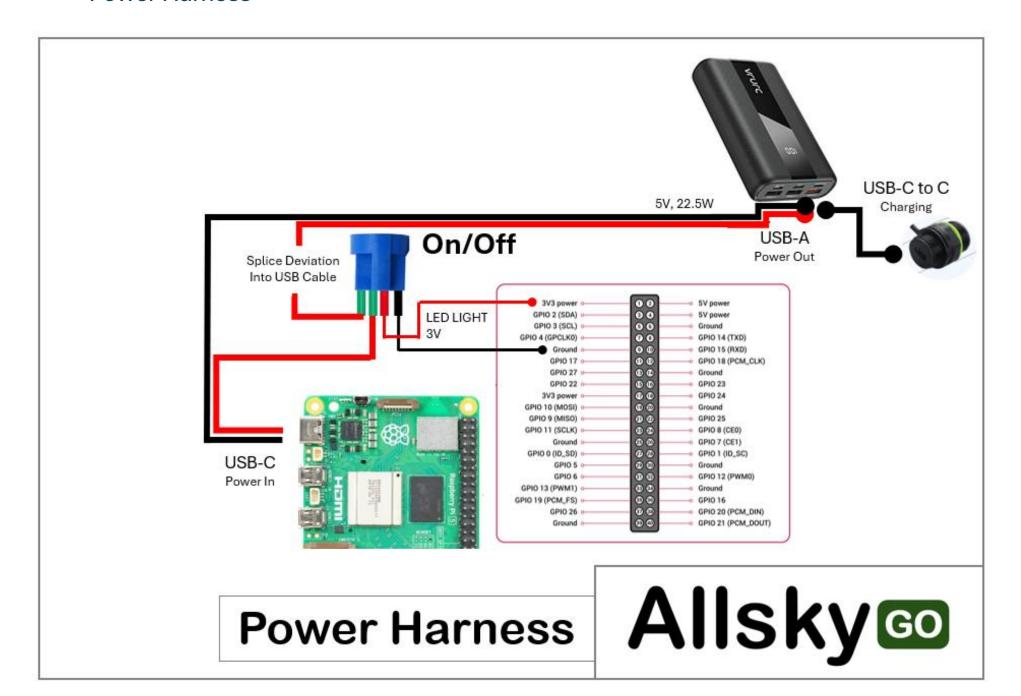


Button Harness

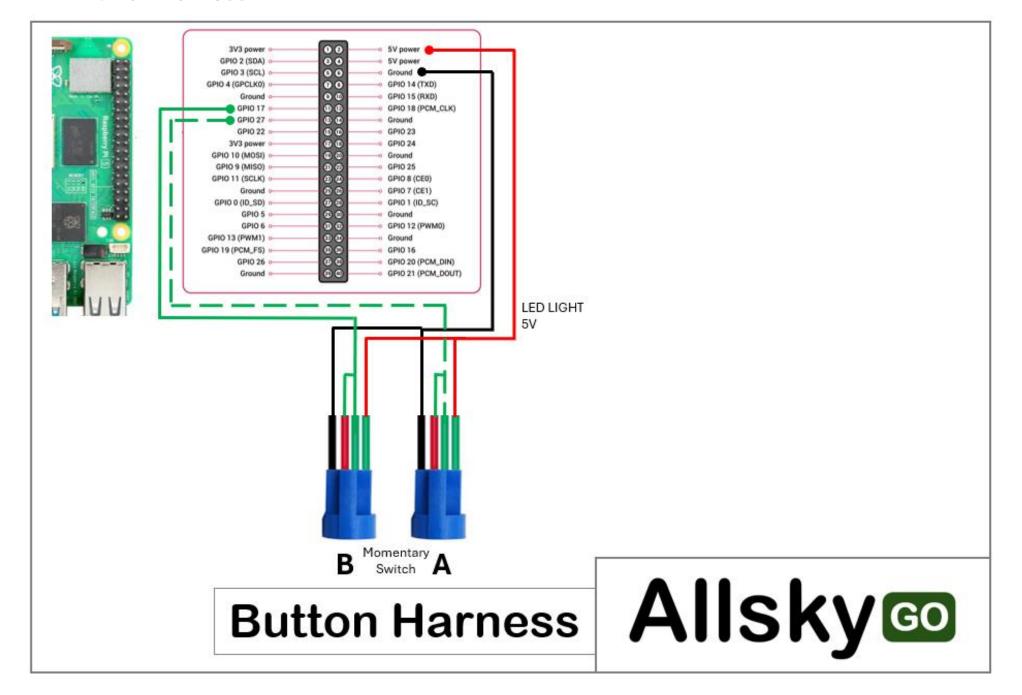


SHT31 Harness

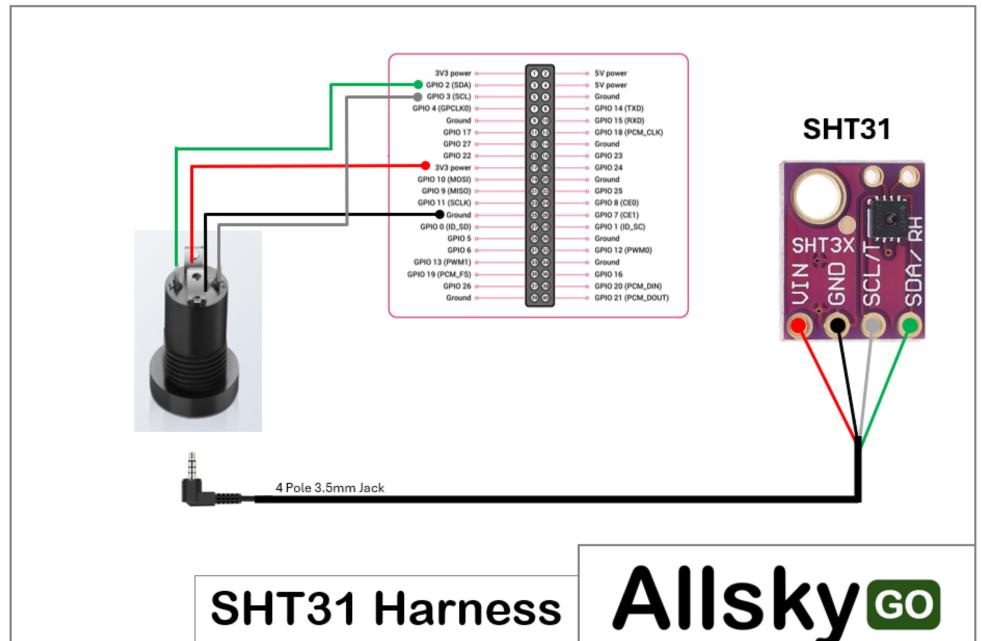

Dimensions

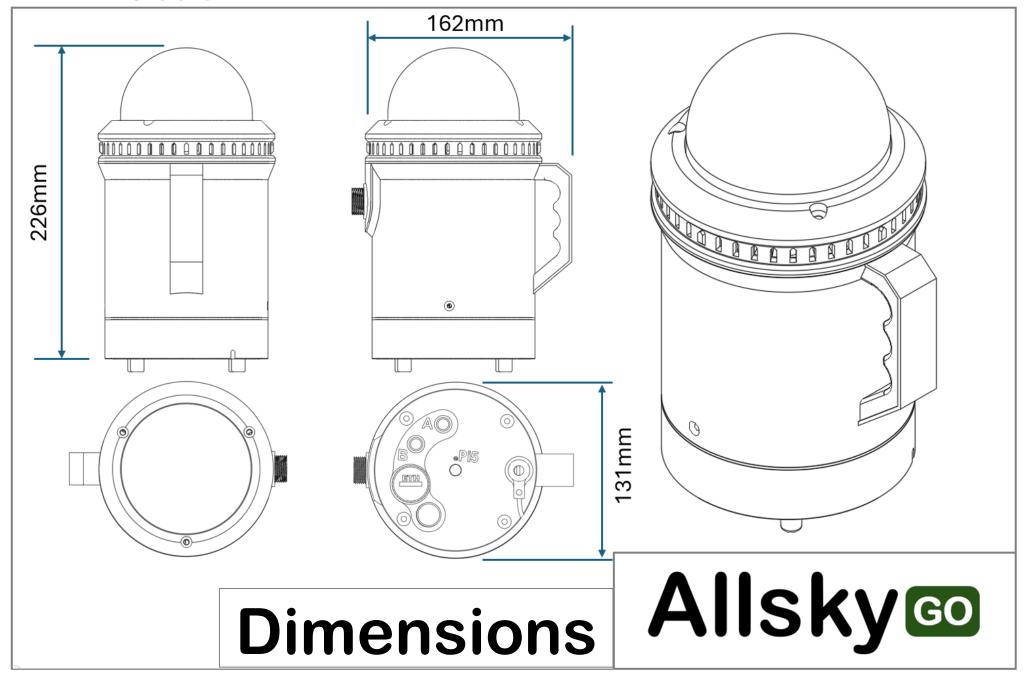

Functions

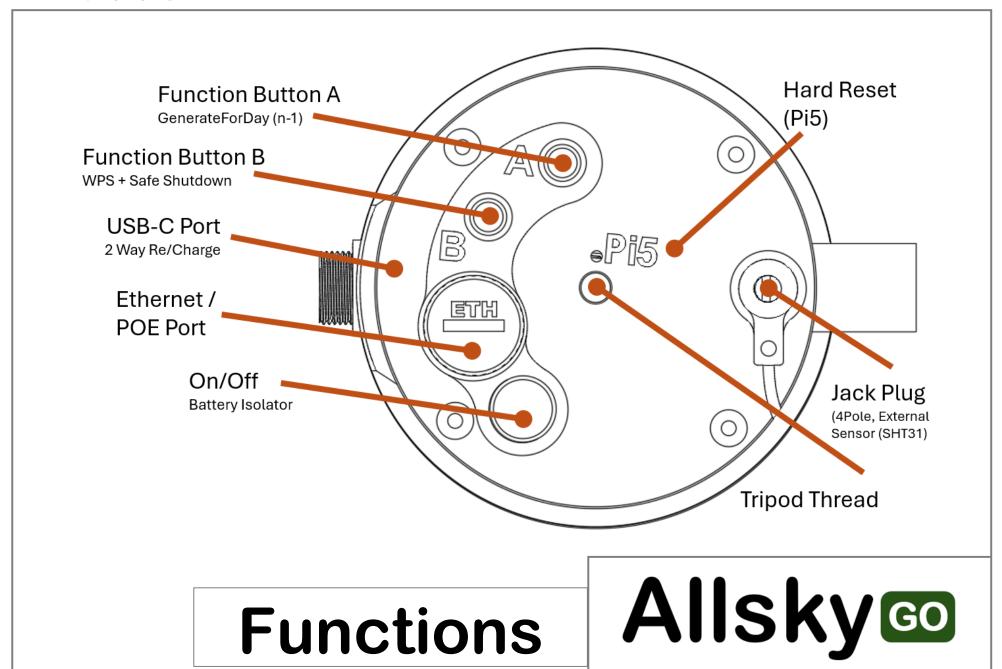


Components

CS-Mount Lens

Characteristic 2.5 or 2.8mm for 150-170deg FOV AliExpress




HQ Camera Mount

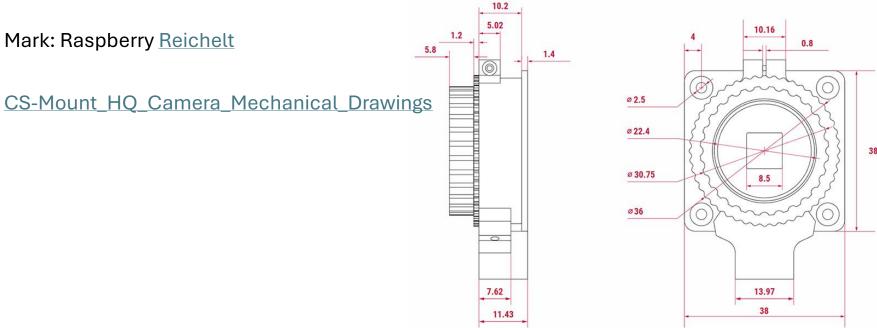


Acrylic Dome

Brand: JMC Amazon

Characteristic 3.5Inc Dome



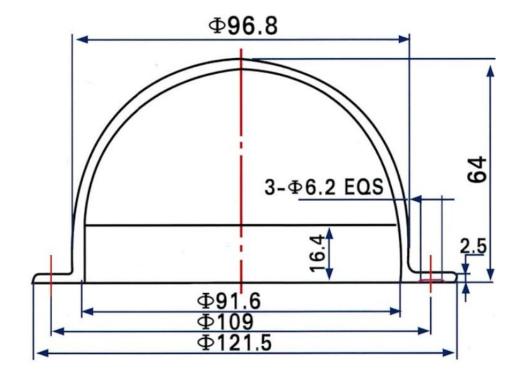

Power Bank

Make: Vrurc Amazon (VRURC Mini Power bank)


Characteristic: 20.000mah



Jack plug (female)

Distributor: PNGKNYOCN - Amazon

Characteristic: 4 Pole – Requires 4 Pole Jack Plug

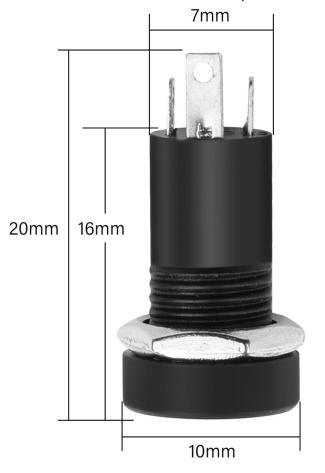



Power Switch (3-9v)

Distributor: Gebildet Amazon

Characteristic: 16mm Thread






Momentary Switch (3-9v)

Distributor: Gebildet Amazon

Characteristic: 12mm Thread

1.8cm
19cm
8mm
Max Panel thickness
14mm
M12×0.75
12mm
Role diameter


Led light on only when you press button
Lumière LED allumée uniquement lorsque vous appuyez sur le bouton
LED-Licht nur an, wenn Sie die Taste drücken
Luce led accesa solo quando si preme il pulsante
Luz LED encendida solo cuando presiona el botón

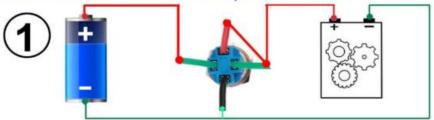

Raspberry Pi5 & Active Cooling Module Reichelt (DE)





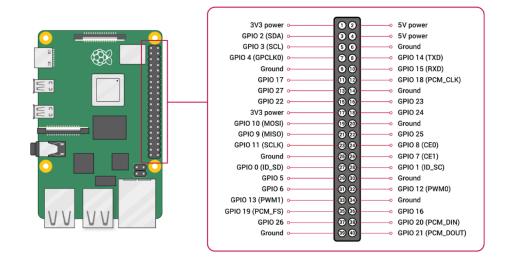

https://datasheets.raspberrypi.com/rpi4/raspberry-pi-4-mechanical-drawing.pdf

Waterproof USB-C Pass-thru (only the core section required)

Distributor: PNGKNYOCN Amazon

Characteristic: 19mm Thread



Distributor: Greluma Amazon

Characteristic: 24mm Diameter






SHT31 Humidity and Temperature Sensor

Different Options exist depending on your circumstance. Sensors with 4 poles can be wired to the Jack Plug and programmed for Raspberry.

<u>Amazon</u>





1/4-20 Tripod Threaded Inserts

Mark: Ruthex Amazon

Characteristic: 7.9-8mm hole – two lengths available

(both compatible)

M3 Threaded Inserts

Characteristic: 3.9-4.0mm width

Mark: Ruthex Amazon









Metal Oxide Film Resistors

Distributor: PATIKIL Amazon

Characteristic: 100 Ohm 5W

Amazon.it

Piezo Buzzer

Distributor: ICQUANZX Amazon

RTC External Battery

Distributor: ZDE Amazon

Characteristics: Coin Battery CR2025

