Allsky V3

PiHQ ZWO





Print Settings

V1.0 Sep 2026

Suggested Print Settings

V3 DOME PROTECTION

Filament Type: (ASA / PETG)
Nozzle Size: (0.4 mm default)
Layer Height: (0.2 mm recommended)

PERIMETERS & SHELLS

Setting	Value
External Perimeters	: 3

INFILL

Setting	Value
Infill Percentage	15 %


SUPPORTS


Setting	Value
Supports	YES
Support Type	ORGANIC
Support	From Build Plate
Paint-On Supports	Recommended

BRIM / SKIRT / RAFT

Setting	Value
Brim	Yes
Brim Type	Inner & Outer


ADHESION & SPECIAL NOTES

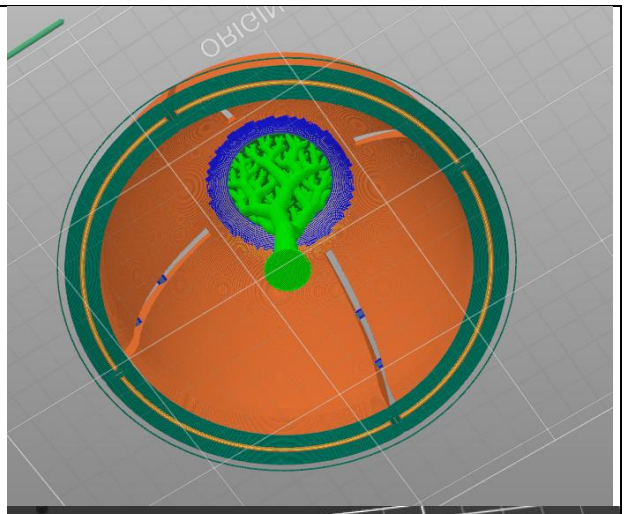

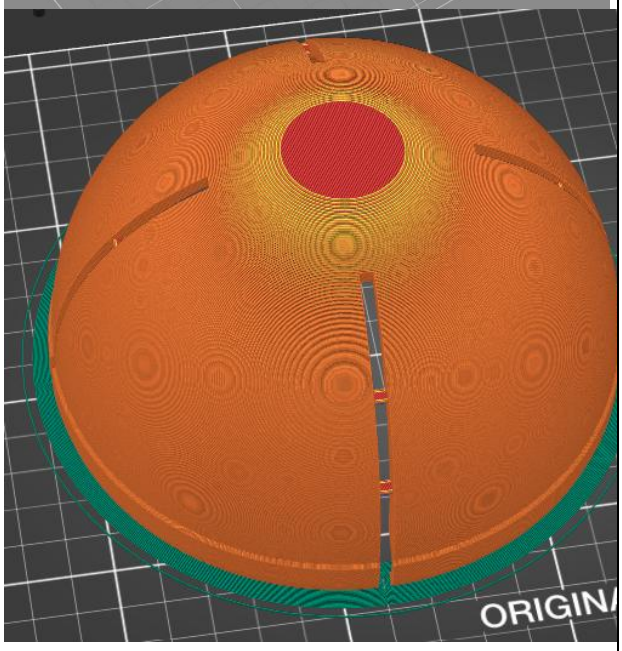

TUB ASSY

Filament Type: (ASA / PETG)
Nozzle Size: (0.4 mm default)
Layer Height: (0.2 mm recommended)

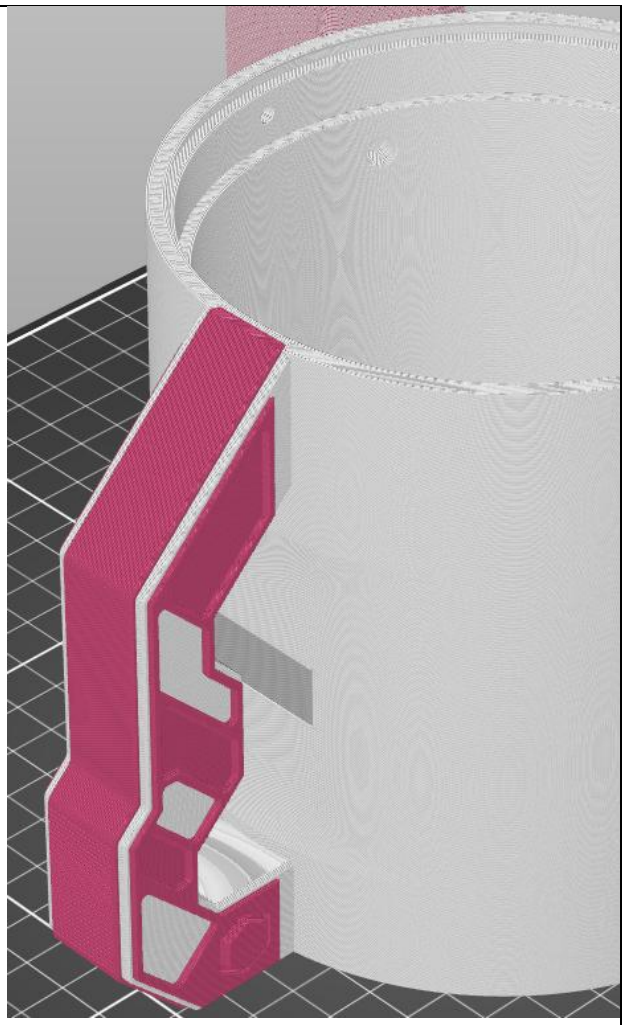

PERIMETERS & SHELLS

Setting	Value
External Perimeters	: 3

INFILL

Setting	Value
Infill Percentage	5 %

SUPPORTS

Setting	Value
Supports	No
Support Type	N/A
Support	N/A
Paint-On Supports	Optional

BRIM / SKIRT / RAFT

Setting	Value
Brim	Optional
Brim Type	Inner

ADHESION & SPECIAL NOTES

Multicolour & Multimaterial Printing Supported.

Separate Print Files available

A-COLOUR SmartBase v2

Filament Type: (ASA / PETG)
Nozzle Size: (0.4 mm default)
Layer Height: (0.2 mm recommended)

PERIMETERS & SHELLS

Setting	Value
External Perimeters	: 3

INFILL

Setting	Value
Infill Percentage	15 %

SUPPORTS

Setting	Value
Supports	Yes
Support Type	From build Plate
Support	Organic/Other
Paint-On Supports	Yes

BRIM / SKIRT / RAFT


Setting	Value
Brim	N/A
Brim Type	N/A


ADHESION & SPECIAL NOTES

PTEG preferred to avoid warping. If printing in ASA please ensure heated enclosure.

SmartBase


Painted Supports on the central Ethernet Port and Jack Interface Rings

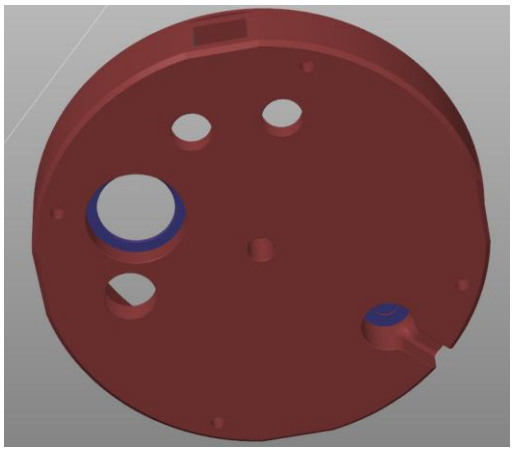

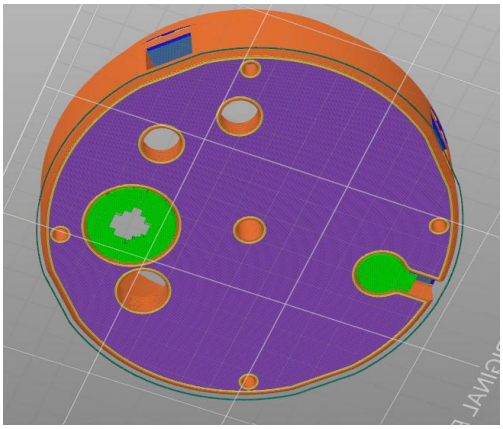

B-Colour Components

Filament Type: (ASA / PETG)
Nozzle Size: (0.4 mm default)
Layer Height: (0.2 mm recommended)

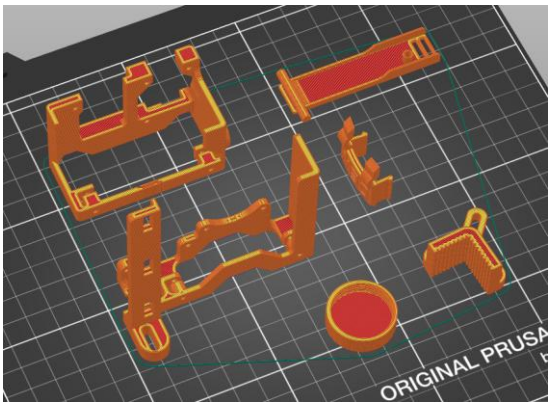

PERIMETERS & SHELLS

Setting	Value
External Perimeters	: 3-4

INFILL

Setting	Value
Infill Percentage	15 %

SUPPORTS

Setting	Value
Supports	No
Support Type	N/A
Support	N/A
Paint-On Supports	Optional

BRIM / SKIRT / RAFT

Setting	Value
Brim	No
Brim Type	N/A

ADHESION & SPECIAL NOTES

Feet Options (MONO)

Filament Type: (ASA / PETG)
Nozzle Size: (0.4 mm default)
Layer Height: (0.2 mm recommended)

PERIMETERS & SHELLS

Setting	Value
External Perimeters	: 3

INFILL

Setting	Value
Infill Percentage	20 %

SUPPORTS

Setting	Value
Supports	Yes
Support Type	From Build Plate
Support	Organic/Other
Paint-On Supports	Optional

BRIM / SKIRT / RAFT


Setting	Value
Brim	Optional
Brim Type	N/A


ADHESION & SPECIAL NOTES

Print Lugs horizontally to ensure maximum strength

Feet

Option A: Landing Feet
Option B: Plugs
Option C: Studs

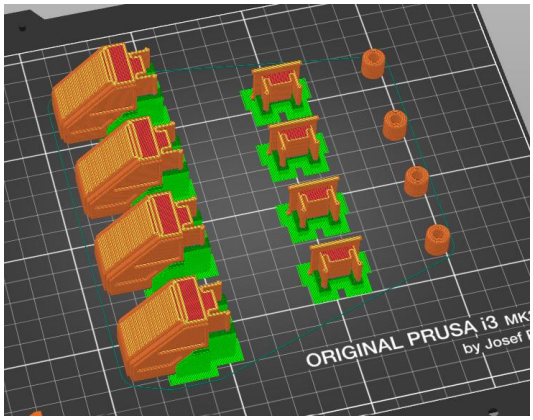

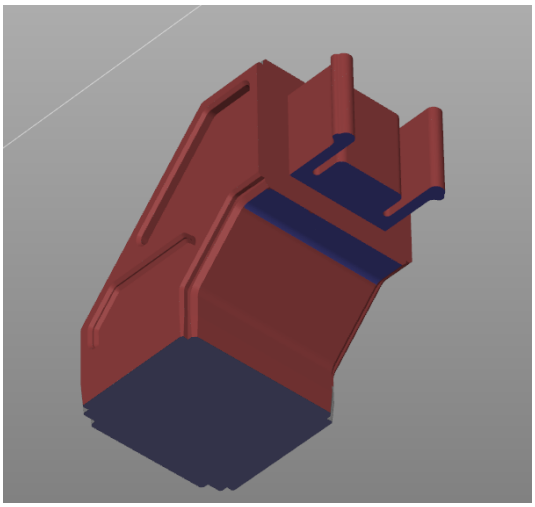

Feet Options (MILTI MATERIAL)

Filament Type: (ASA / PETG)
Nozzle Size: (0.4 mm default)
Layer Height: (0.2 mm recommended)

PERIMETERS & SHELLS

Setting	Value
External Perimeters	: 3

INFILL

Setting	Value
Infill Percentage	20 %

SUPPORTS

Setting	Value
Supports	Yes
Support Type	From Build Plate
Support	Organic/Other
Paint-On Supports	Optional

BRIM / SKIRT / RAFT

Setting	Value
Brim	Optional
Brim Type	N/A


ADHESION & SPECIAL NOTES

Print Lugs in upright position to ensure maximum strength.

Try TPU Foot pads with a multi-material printer


Feet

Landing Feet defined in 5 Bodies
Assign Colour & Material in your MMU

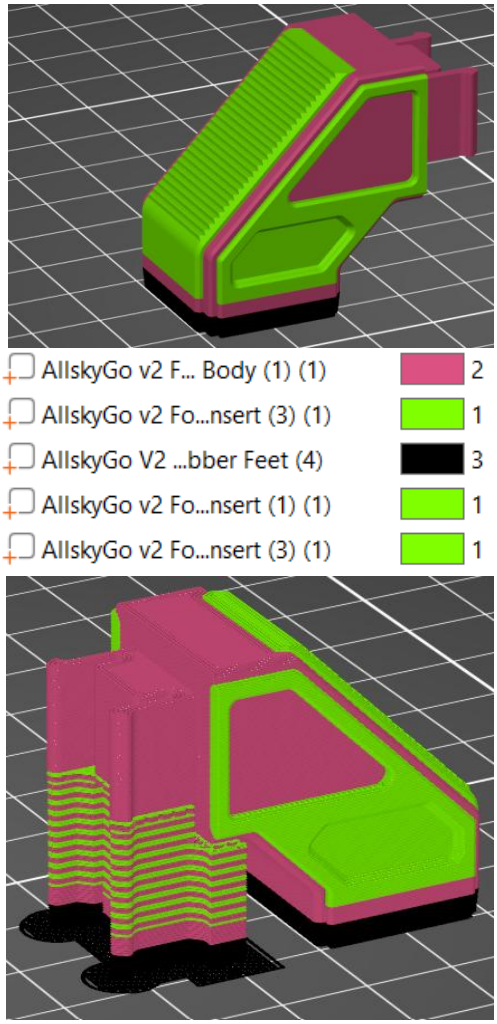

SEALS & GASKETS

Filament Type: (TPU)
Nozzle Size: (0.4 mm default)
Layer Height: (0.2 mm recommended)

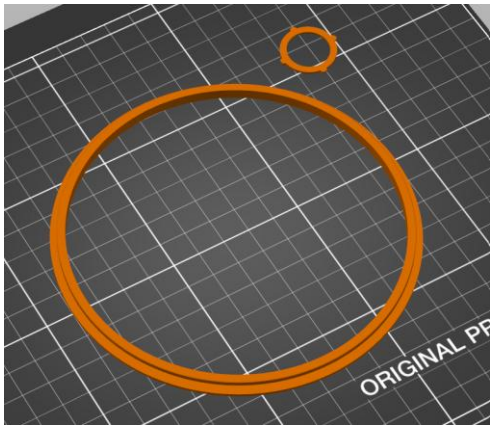

PERIMETERS & SHELLS

Setting	Value
External Perimeters	Default

INFILL

Setting	Value
Infill Percentage	100%

SUPPORTS

Setting	Value
Supports	No
Support Type	N/A
Support	N/A
Paint-On Supports	N/A

BRIM / SKIRT / RAFT

Setting	Value
Brim	N/A
Brim Type	N/A

ADHESION & SPECIAL NOTES

Speed	10mm/s (all)
Cooling	Off
Retraction	Disabled
Gap Fill	Off
Cross Perimeters	Avoid

Print on Smooth Bed to ensure correct Sealing Surface.