



Port Pot V2 Rev A – first schematic draft

for pin order, ESP32 boot pins, and AP63203 layout before PCB routing.


USB-C input + native USB

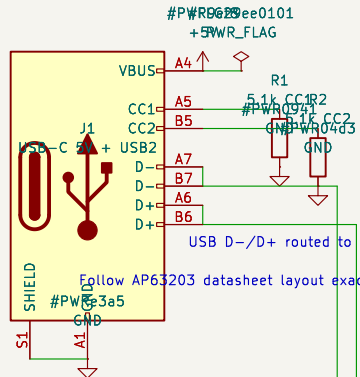

3.3V buck regulator

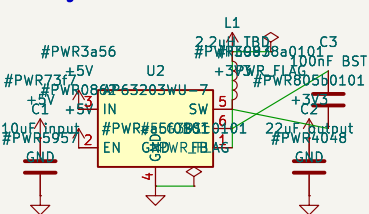


ESP32-S3 + connectors

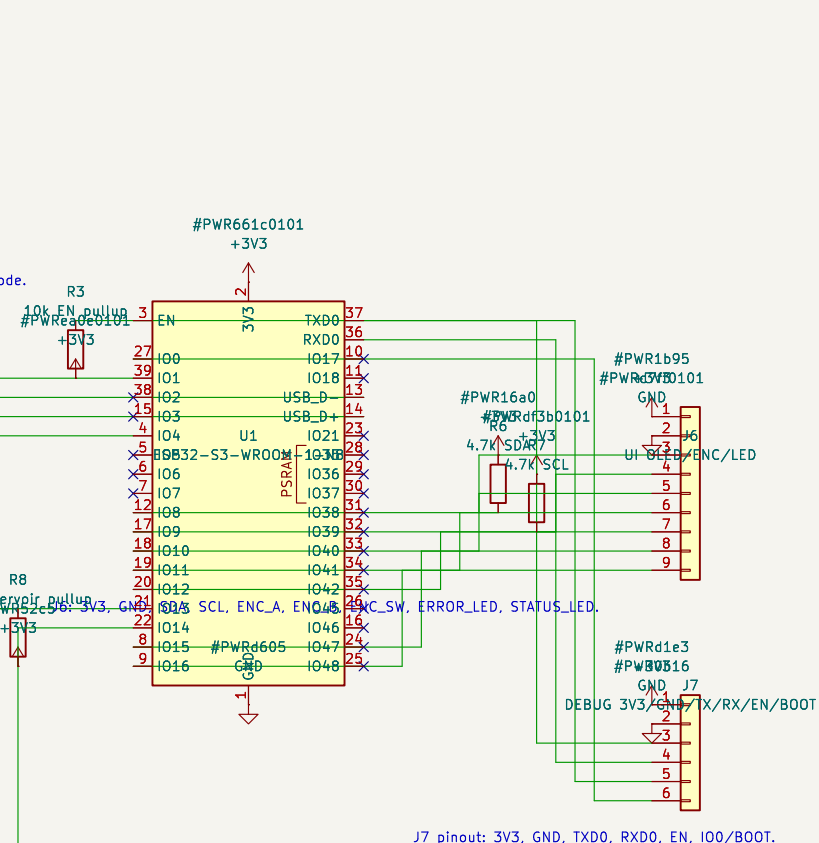

MOISTURE_ADC uses IO1 / ADC1 compatible pin. Sensor output must be <= 3.3V.

Pump low-side driver

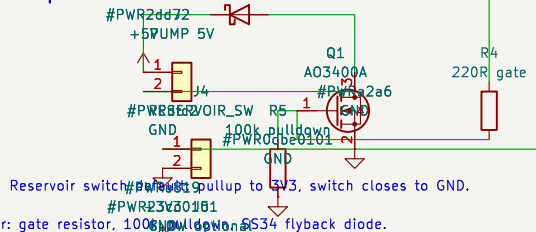

Reservoir switch: pullup to 3V3, switch closes to GND.

AO3400A low-side driver: gate resistor, 100k pullup to 3V3, 5V3 flyback diode.

FLOW_PULSE must be level shifted if selected sensor outputs 5V pulses.

J7 pinout: 3V3, GND, TXD0, RXD0, EN, IO0/BOOT.