



Port Pot V2 Rev A – first schematic draft

for pin order, ESP32 boot pins, and AP63203 layout before PCB routing.


USB-C input + native USB

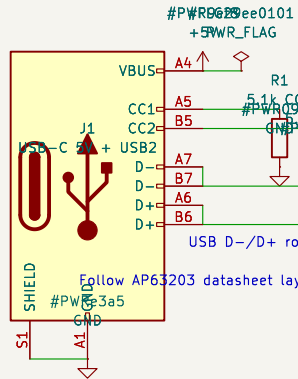

3.3V buck regulator

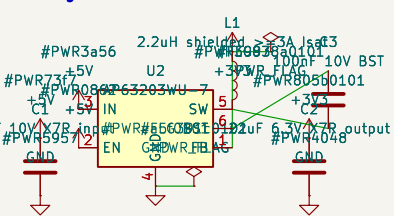


ESP32-S3 + connectors

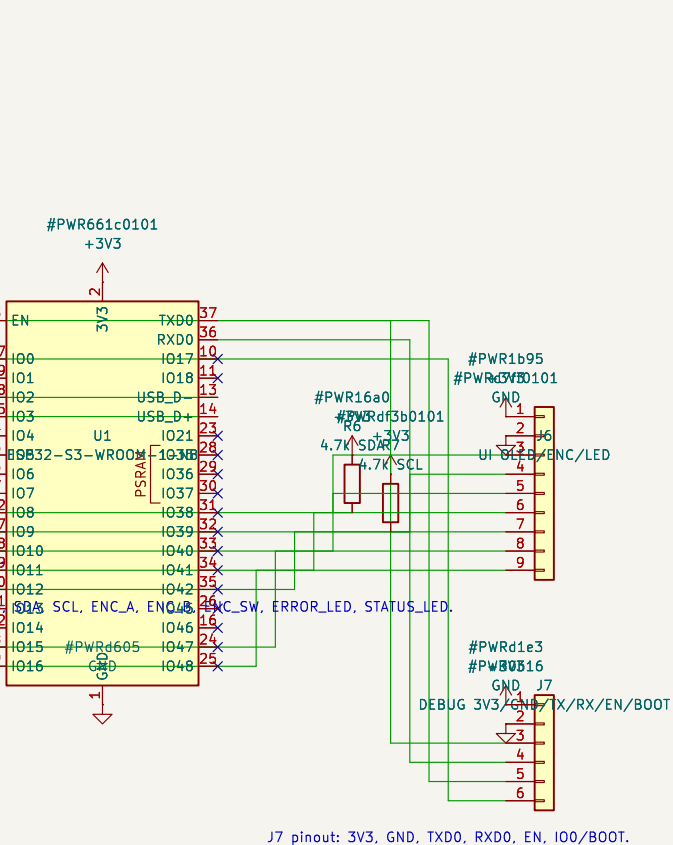

MOISTURE_ADC uses IO1 / ADC1-capable pin through R10. C4 is optional/DNP ADC filter. Sensor output must be $\leq 3.3V$.

Pump low-side driver

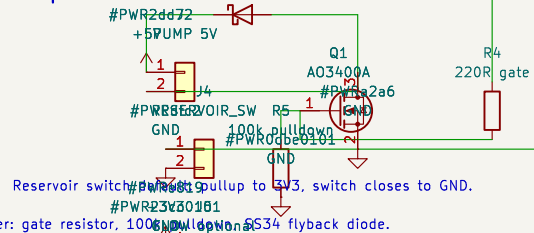

FLOW_PULSE must be level shifted if selected sensor outputs 5V pulses.