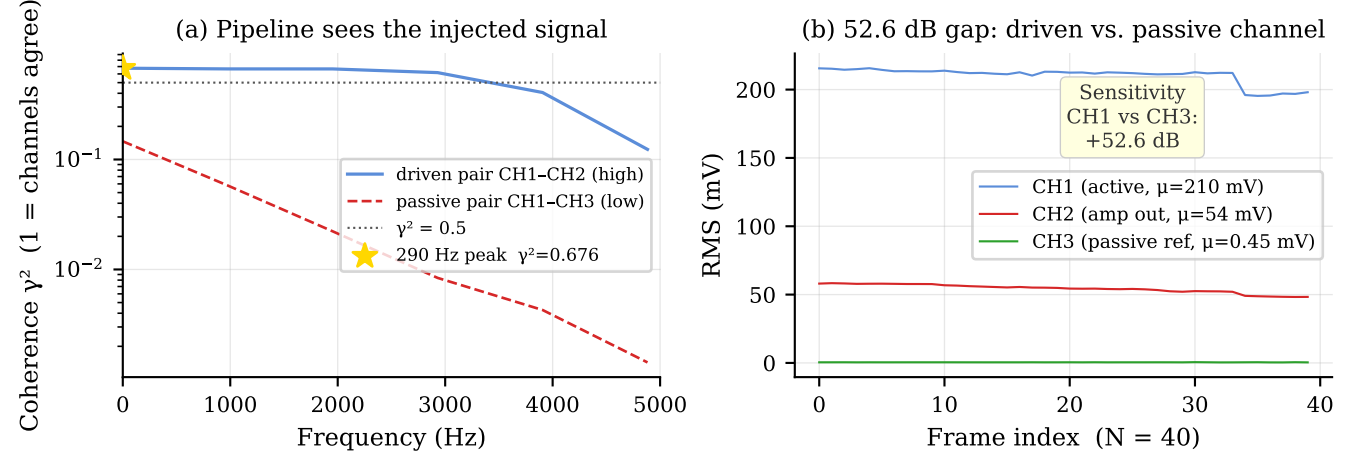
(a) Pipeline sees the injected signal
Coherence γ² (1 = channels agree)
10⁻¹
10⁻²
driven pair CH1–CH2 (high)
passive pair CH1–CH3 (low)
γ² = 0.5
290 Hz peak γ²=0.676
0
1000
2000
3000
4000
5000
Frequency (Hz)
(b) 52.6 dB gap: driven vs. passive channel
RMS (mV)
200
150
100
50
0
Sensitivity
CH1 vs CH3:
+52.6 dB
CH1 (active, μ=210 mV)
CH2 (amp out, μ=54 mV)
CH3 (passive ref, μ=0.45 mV)
0
10
20
30
40
Frame index (N = 40)