
BCR2000 overlay · Ensoniq EPS

Sheet 1 of 2 · top row: push encoders (4 groups) and the two button rows. Preset "EPS I1 L1 WS1 0-63".

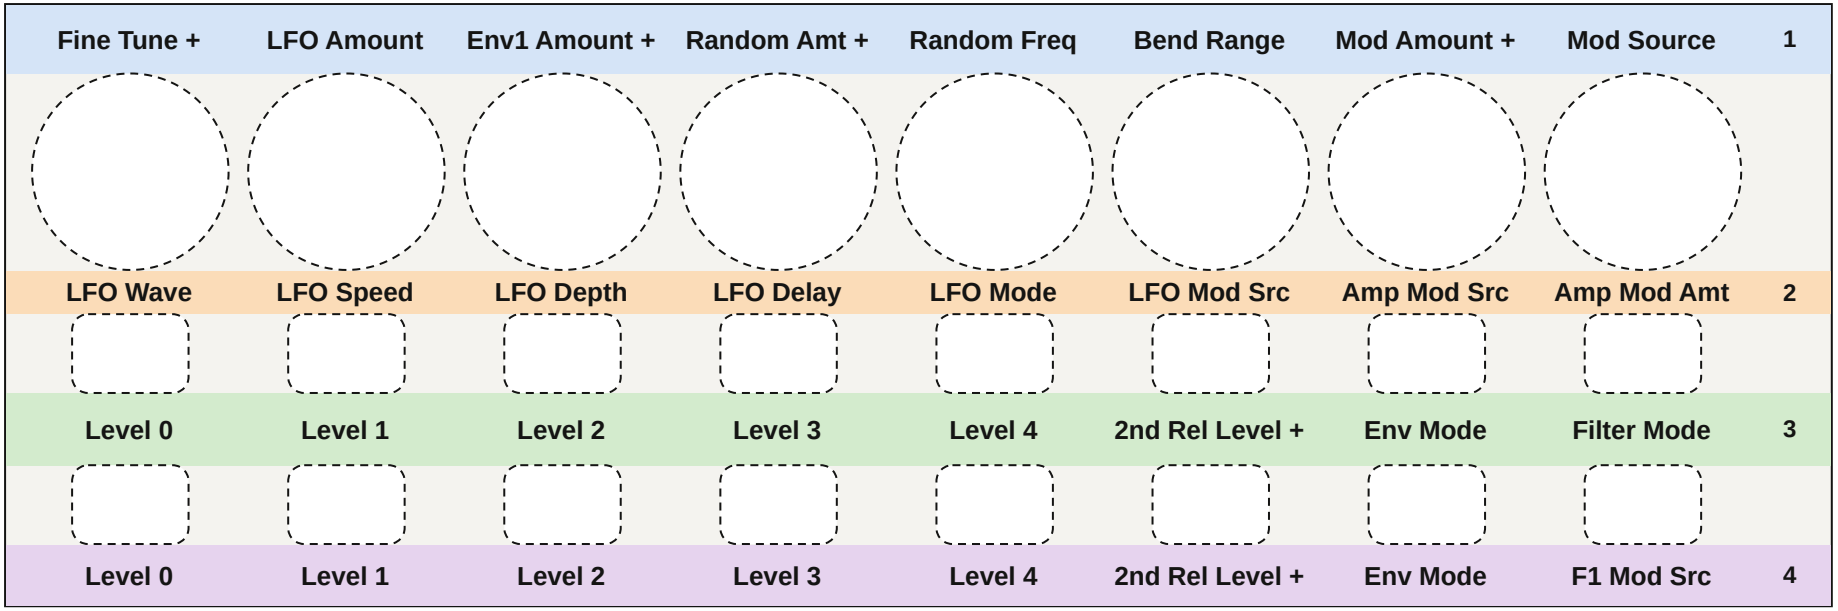

Reading the four bands

- 1 Group 1 · Pitch (above the encoders)
- 2 Group 2 · LFO and amp modulation
- 3 Group 3 · ENV2 (filter), "Hard" levels
- 4 Group 4 · ENV3 (amp), "Hard" levels

The active group is selected with the four ENCODER GROUPS keys of the BCR2000. The + sign marks a bipolar parameter for which the preset only sends positive values (0 to +63).


Printing and cutting

Print on A4 landscape at 100 % ("actual size", no fit-to-page). Check the scale with the line below before cutting.

This line must measure 100 mm

Cut along the solid outline, then cut out the white dashed areas: 8 circles (encoders and LED rings) and 16 button windows. Place the piece against the left edge of the panel.

BCR2000 overlay · Ensoniq EPS

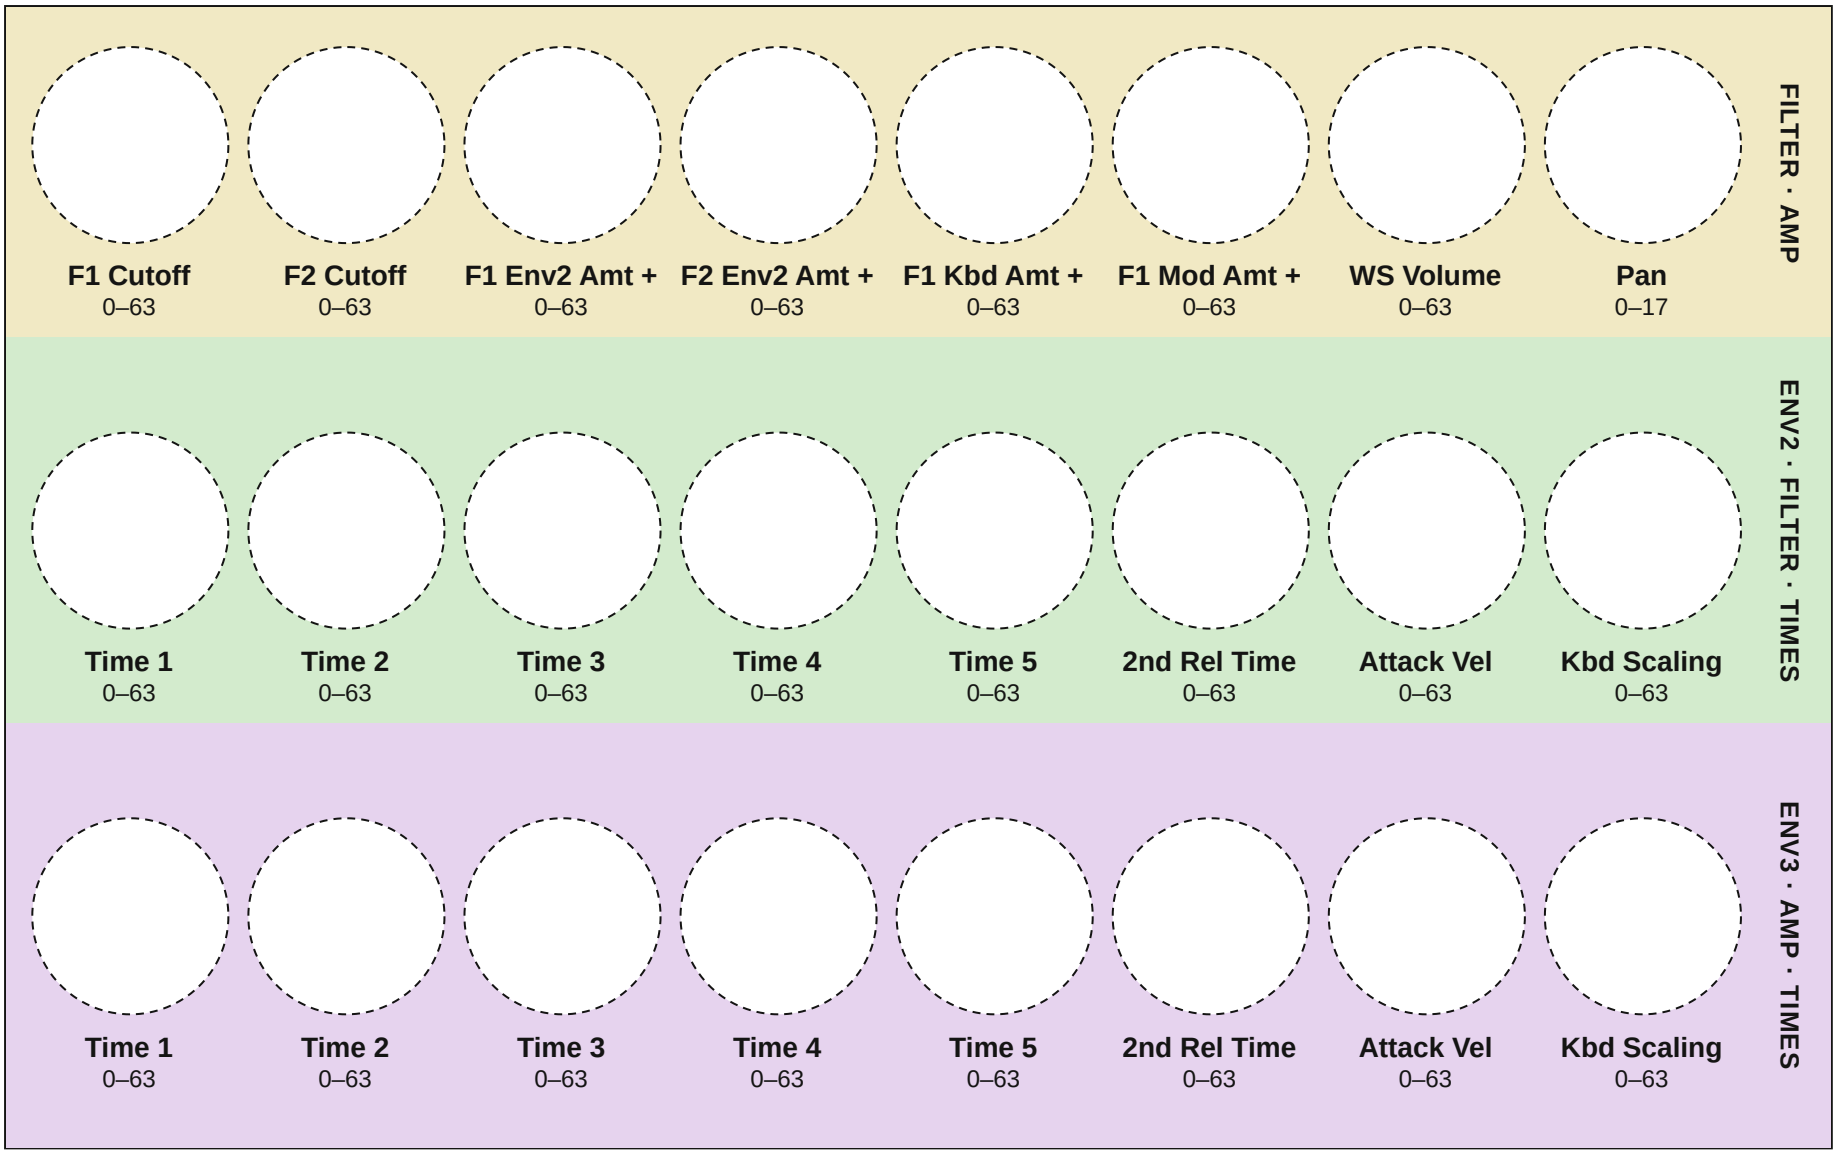

This line must measure 100 mm

Print at 100 %. Cut along the solid outline and cut out the 24 dashed circles.
The + sign marks a bipolar parameter: only positive values are sent.