

BOOST CONTROL CARD - FABRICATION DRAWING

BOOST_control_RC2, 2026-09-30. Files: BOOST_control_RC2_gerbers.zip. Units: mm.

FABRICATION NOTES


- 1. ALL VIAS EPOXY FILLED AND COPPER CAPPED (resin plugged, plated over; IPC-4761 Type VII). 188 of the 393 vias sit in SMD pads. Via drills 0.30 mm (JLCPCB filled-via range 0.2-0.5 mm). Order option "Via Covering: Epoxy Filled & Capped".
- 2. Material FR-4, Tg 155 C or better (JLCPCB "FR4 TG155", Nan Ya NP-155F). 8 copper layers. Finished thickness 1.6 mm +/-10 %.
- 3. Copper 1 oz (35 um) finished on all eight layers: outer 1 oz, inner 1 oz (order option "Inner copper weight 1 oz"; the fab default of 0.5 oz inner is NOT acceptable).
- 4. Stackup: the fab's standard 8-layer 1.6 mm build (no stackup specified), as in the table. No impedance control.
- 5. Surface finish ENIG. Solder mask green LPI both sides. Silkscreen white both sides.
- 6. Minimum track / space: 0.15 / 0.20 mm on every layer. Minimum drill 0.30 mm (vias); smallest plated pad hole 1.00 mm.
- 7. Minimum via annular ring 0.10 mm; minimum plated pad annular ring 0.33 mm. Via-to-via hole gap >= 0.30 mm; filled via to any pad hole >= 0.59 mm.
- 8. Plated hole tolerance +0.13 / -0.08 mm. J11 2x15 header holes are drilled 1.05 mm for Samtec 0.64 mm square posts.
- 9. Non-plated holes: 4 x 3.20 mm (standoffs) and 2 slots 2.80 x 1.40 mm (J9 cable tie), routed; the slots are G85 routes in the NPTH drill file.
- 10. Outline on the Edge.Cuts (GM1) layer, tolerance +/-0.2 mm.
- 11. Electrical test: 100 % flying probe; IPC-D-356 netlist BOOST_control_RC2.ipc356 supplied.
- 12. No order number or other marking to be added ("Remove Mark").
- 13. Assembly panel: standard PCBA needs at least 70 x 70 mm; order "Panel by JLCPCB" (edge rails) for this 45 x 45 mm card.

STACKUP (from the board file; copper + dielectric 1.654 mm, + mask)

F.Mask	solder mask		0.010
F.Cu	copper, 1 oz	signal / parts	0.035
	prepreg 2116 NP-155F, er 4.16		0.109
In1.Cu	copper, 1 oz	GND plane	0.030
	core NP-155F, er 4.23		0.250
In2.Cu	copper, 1 oz	signal	0.030
	prepreg 2 x 2116		0.218
In3.Cu	copper, 1 oz	signal / 5V pour	0.030
	core NP-155F		0.250
In4.Cu	copper, 1 oz	signal / GND fill	0.030
	prepreg 2 x 2116		0.218
In5.Cu	copper, 1 oz	signal	0.030
	core NP-155F		0.250
In6.Cu	copper, 1 oz	GND plane	0.030
	prepreg 2116		0.109
B.Cu	copper, 1 oz	signal / parts	0.035
B.Mask	solder mask		0.010

DRILL TABLE

sym	drill mm	type	count	used for
○	0.30	PTH	393	vias (filled, capped)
□	1.00	PTH	11	J9 wire pads
△	1.05	PTH	30	2x15 header (J11)
◇	1.40	NPTH slot	2	J9 tie slots 2.8 x 1.4
▽	3.20	NPTH	4	standoffs

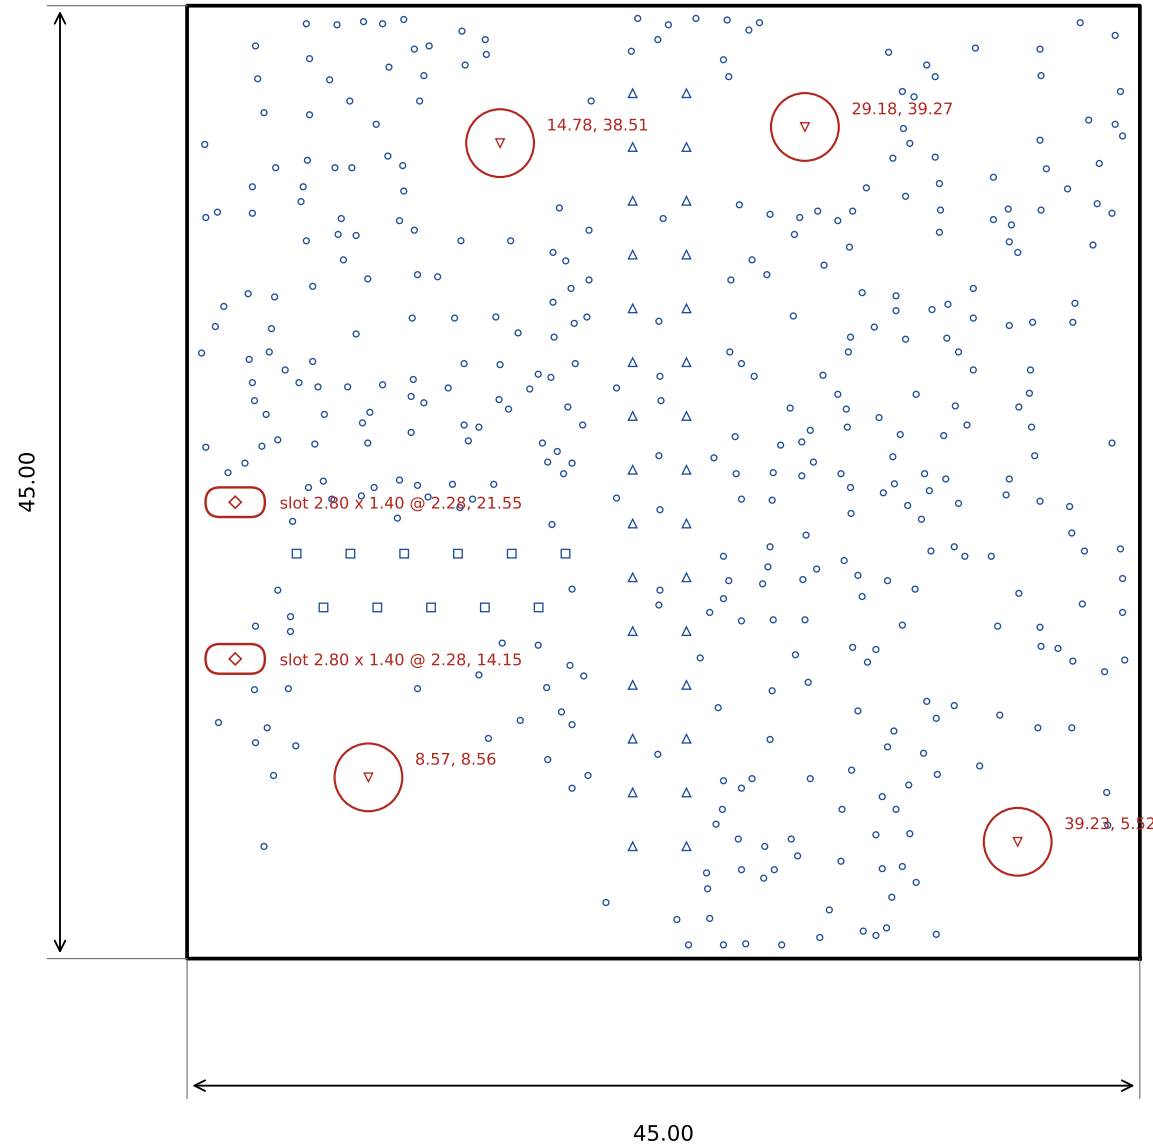

Datum: lower-left corner of the outline (0, 0). Dimensions in mm, outline tolerance +/-0.2 mm.
Drawn from the Excellon files: every drilled hole is shown with its symbol; holes >= 2 mm also to scale.