

I U S

Faculte des Sciences et des Technologies


Reseaux

TD n° 6

Etudiante : Christy G. LAMBERT

Professeur : Ismael SAINT ARMOUR

Le 11 mai 2026

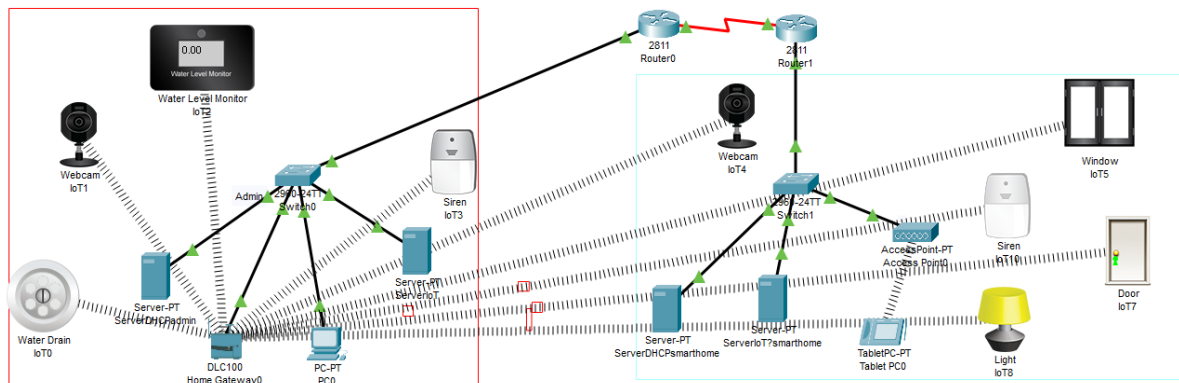

File Edit Options View Tools Extensions Window Help

Logical Physical x 734, y: 388

Time: 00:25:28

Router0

Physical Config CLI Attributes

IOS Command Line Interface

```

256K bytes of system memory, 256K bytes of data memory.
DRAM configuration is 64 bits wide with parity disabled.
256K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)

--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>enable
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Serial0/2/0
Router(config-if)#ip address 192.168.3.1 255.255.255.252
Router(config-if)#clock rate 64000
This command applies only to DCE interfaces
Router(config-if)#no shutdown

%LINK-S-CHANGED: Interface Serial0/2/0, changed state to down
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#ip address 192.168.4.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-S-CHANGED: Interface FastEthernet0/0, changed state to up


%LINEPROTO-S-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
Router(config-if)#exit
Router(config)#

```

Copy Paste

Root

Realtime Simul

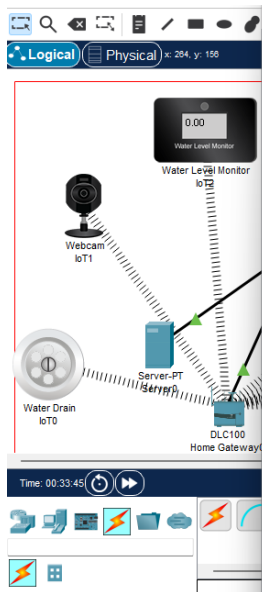

```
Router1
Physical Config CLI Attributes
IOS Command Line Interface
256K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)
Press RETURN to get started!

Router>
Router>enable
Router>conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Se0/2/0
Router(config-if)#ip address 192.168.3.2 255.255.255.252
Router(config-if)#clock rate 64000
Router(config-if)#no shutdown


Router(config-if)#
%LINK-5-CHANGED: Interface Serial0/2/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/2/0, changed state to up

Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#
% Invalid input detected at '^' marker.

Router(config)#interface FastEthernet0/0
Router(config-if)#ip address 192.168.4.2 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#
```

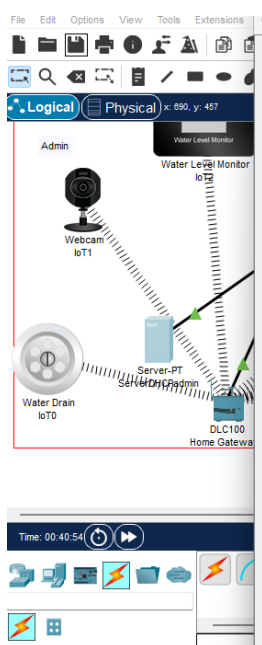

ServerDHCPAdmin

Physical Config Services Desktop Programming Attributes

IP Configuration

☐ DHCP

☒ Static

IPv4 Address: 192.168.5.1

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.10.1

DNS Server: 0.0.0.0

IPv6 Configuration

☐ Automatic

☒ Static

IPv6 Address: /

Link Local Address: FE80::20D:B0FF:FEA1:7935

Default Gateway:

DNS Server:


802.1X

☐ Use 802.1X Security

Authentication: MD5

Username:

Password:

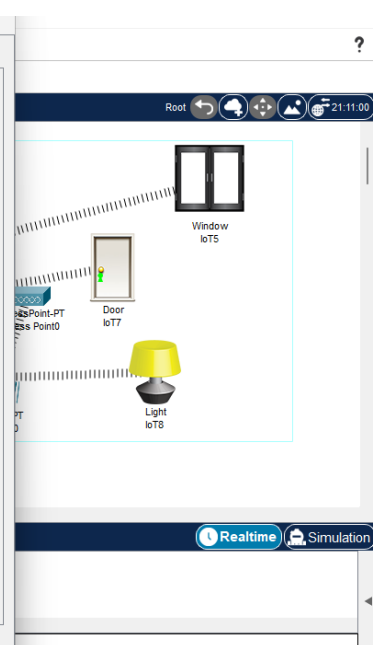

ServerDHCPadmin

Physical
Config
Services
Desktop
Programming
Attributes

SERVICES

HTTP
DHCP
DHCPv6
TFTP
DNS
SYSLOG
AAA
NTP
EMAIL
FTP
IoT
VM Management
Radius EAP

DHCP

Interface
FastEthernet0
Service
On
Off

Pool Name
serverPool

Default Gateway
192.168.10.1

DNS Server
0.0.0.0

Start IP Address :
192
168
5
1

Subnet Mask:
255
255
255
0

Maximum Number of Users :
255

TFTP Server:
0.0.0.0

WLC Address:
0.0.0.0

Add
Save
Remove

Pool Name	Default Gateway	DNS Server	Start IP Address	Subnet Mask	Max User	TFTP Server	WLC Address
serverPool	192.168....	0.0.0.0	192.168....	255.255....	255	0.0.0.0	0.0.0.0

ServerIoT

Physical
Config
Services
Desktop
Programming
Attributes

IP Configuration

IP Configuration

DHCP
Static

IPv4 Address
192.168.10.2

Subnet Mask
255.255.255.0

Default Gateway
192.168.5.2

DNS Server
0.0.0.0

IPv6 Configuration

Automatic
Static

IPv6 Address
/

Link Local Address
FE80::201:42FF:FE66:8EB5

Default Gateway

DNS Server

802.1X

Use 802.1X Security

Authentication
MDS

Username

Password

ServerIoT

Physical

Config

Services

Desktop

Programming

Attributes

SERVICES

HTTP

DHCP

DHCPv6

TFTP

DNS

SYSLOG

AAA

NTP

EMAIL

FTP

IoT

VM Management

Radius EAP

DHCP

Interface

FastEthernet0

Service

On

Off

Pool Name

serverPool

Default Gateway

192.168.5.2

DNS Server

0.0.0.0

Start IP Address :

192

168

10

2

Subnet Mask:

255

255

255

0

Maximum Number of Users :

254

TFTP Server:

0.0.0.0

WLC Address:

0.0.0.0

Add

Save

Remove

Pool Name	Default Gateway	DNS Server	Start IP Address	Subnet Mask	Max User	TFTP Server	WLC Address
serverPool	192.168....	0.0.0.0	192.168....	255.255....	254	0.0.0.0	0.0.0.0

Top

ServerDHCPsmarthome

Physical

Config

Services

Desktop

Programming

Attributes

IP Configuration

IP Configuration

DHCP

Static

IPv4 Address

192.168.10.3

Subnet Mask

255.255.255.0

Default Gateway

192.168.5.3

DNS Server

0.0.0.0

IPv6 Configuration

Automatic

Static

IPv6 Address

Link Local Address

FE80::20A:F3FF:FE1A:ED62

Default Gateway

DNS Server

802.1X

Use 802.1X Security

Authentication

MD5

Username

Password

ServerDHCPsmarthome

PhysicalConfigServicesDesktopProgrammingAttributes

SERVICES

HTTP

DHCP

DHCPv6

TFTP

DNS

SYSLOG

AAA

NTP

EMAIL

FTP

IoT

VM Management

Radius EAP

DHCP

InterfaceFastEthernet0ServiceOnOff

Pool NameserverPool

Default Gateway192.168.5.3

DNS Server0.0.0.0

Start IP Address : 192168103

Subnet Mask: 2552552550

Maximum Number of Users : 253

TFTP Server: 0.0.0.0

WLC Address: 0.0.0.0

AddSaveRemove

Pool Name	Default Gateway	DNS Server	Start IP Address	Subnet Mask	Max User	TFTP Server	WLC Address
serverPool	192.168....	0.0.0.0	192.168....	255.255....	253	0.0.0.0	0.0.0.0

ServerIoT?smarthome

PhysicalConfigServicesDesktopProgrammingAttributes

IP Configuration

IP Configuration

DHCP

Static

IPv4 Address192.168.3.5

Subnet Mask255.255.255.0

Default Gateway192.168.5.4

DNS Server0.0.0.0

IPv6 Configuration

Automatic

Static

IPv6 Address

Link Local AddressFE80::200:CFF:FE88:3CE7

Default Gateway

DNS Server

802.1X

Use 802.1X Security

AuthenticationMD5

Username

Password

Top

ServerIoT?smarthome

PhysicalConfigServicesDesktopProgrammingAttributes

SERVICES

HTTP

DHCP

DHCPv6

TFTP

DNS

SYSLOG

AAA

NTP

EMAIL

FTP

IoT

VM Management

Radius EAP

DHCP

InterfaceFastEthernet0

ServiceOnOff

Pool NameserverPool

Default Gateway192.168.5.4

DNS Server0.0.0.0

Start IP Address : 19216835

Subnet Mask: 2552552550



Maximum Number of Users : 251

TFTP Server: 0.0.0.0

WLC Address: 0.0.0.0

AddSaveRemove

Pool Name	Default Gateway	DNS Server	Start IP Address	Subnet Mask	Max User	TFTP Server	WLC Address
serverPool	192.168....	0.0.0.0	192.168....	255.255....	251	0.0.0.0	0.0.0.0

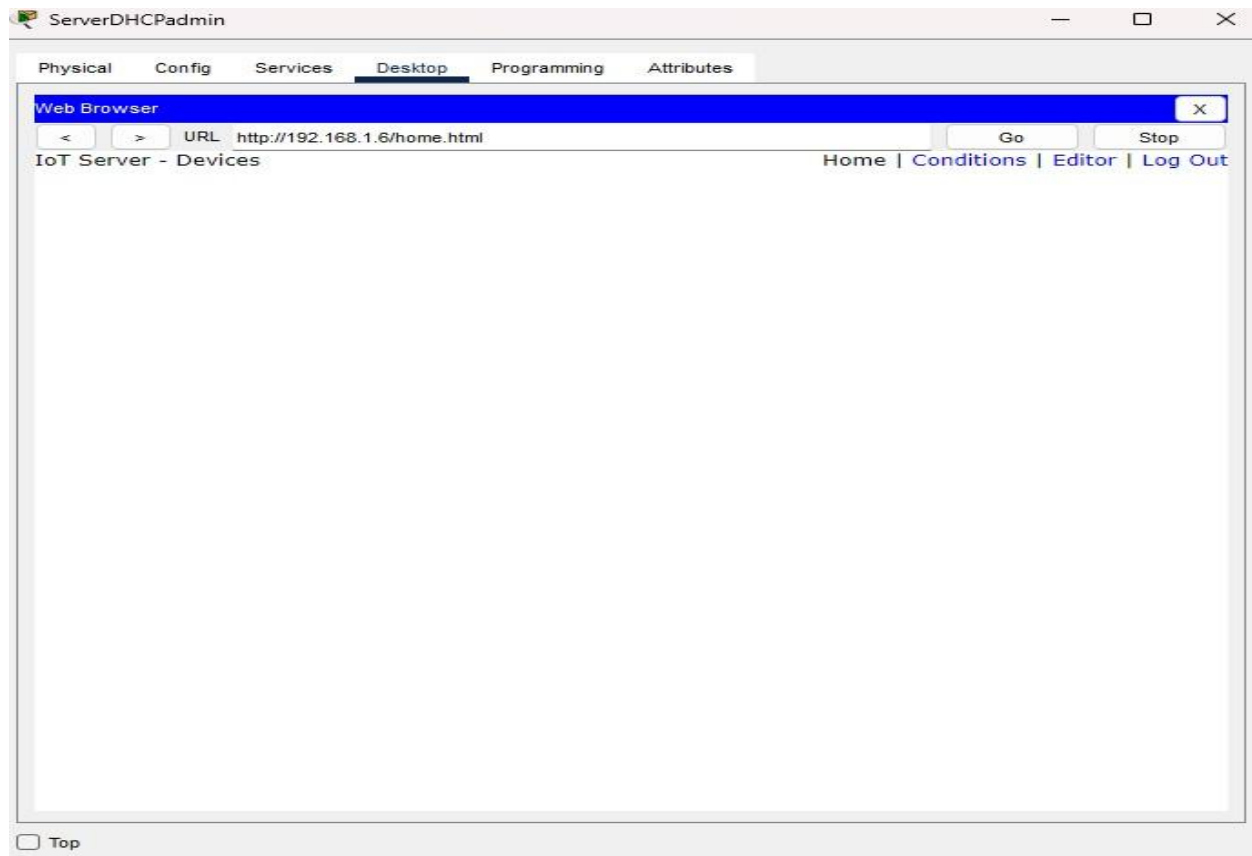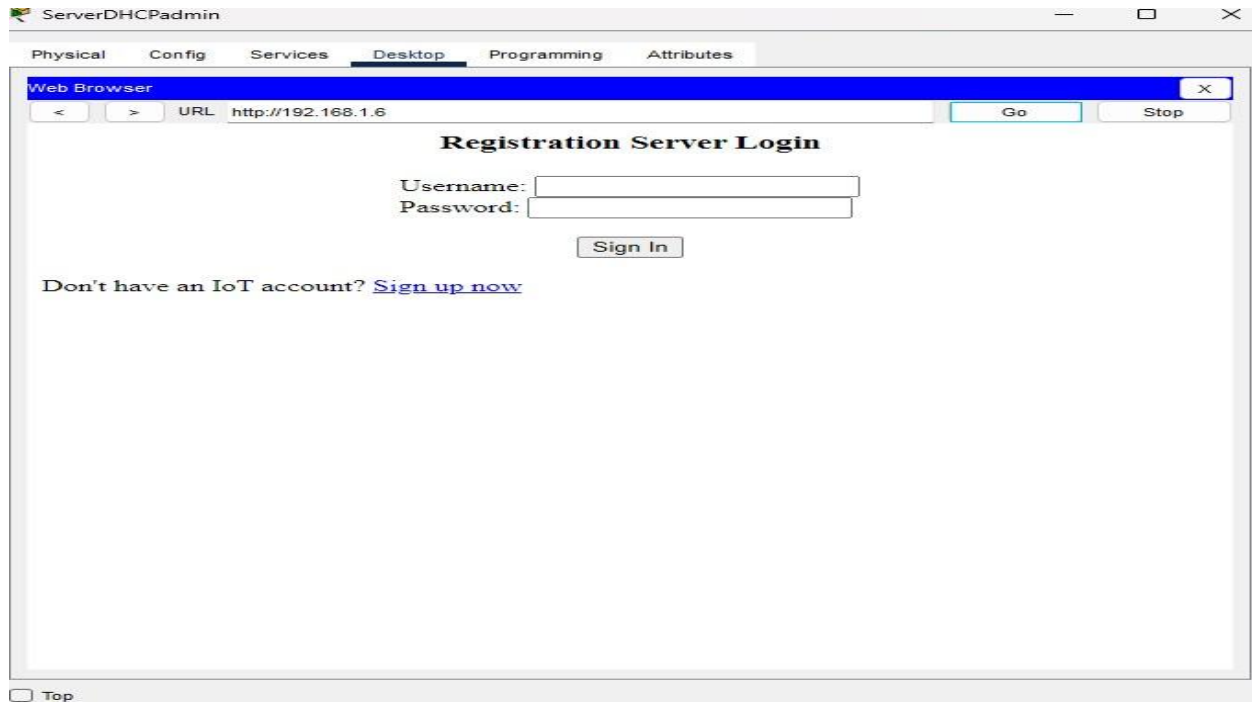

IoT0

Specifications

VO Config

Physical

Config

Thing Editor

Programming

Attributes

GLOBAL

Settings

Algorithm Settings

Files

INTERFACE

Wireless0

Bluetooth

Wireless0

Port Status

On

Bandwidth

300 Mbps

MAC Address

0001.96E6.91CB

SSID

lan1

Authentication

Disabled

WPA-PSK

WPA

802.1X

WEP

WPA2-PSK

WPA2

Method:

WEP Key

PSK Pass Phrase

User ID

Password

MD5

User Name

Password

Encryption Type

Disabled

IP Configuration

DHCP

Static

IPv4 Address

192.168.25.100

Subnet Mask

255.255.255.0

IPv6 Configuration

Automatic

Static

IPv6 Address

/

Link Local Address

FE80::201:96FF:FEE6:91CB

Top

Advanced

Cisco Packet Tracer - C:\Users\magda\Cisco Packet Tracer 8.2.2\saves\...

File Edit Options View Tools Extensions Window Help

Logical Physical x: 988, y: 203

Time: 02:32:43

IoT2

Specifications Physical Config Attributes

GLOBAL

Settings

Algorithm Settings

Files

INTERFACE

Wireless0

Bluetooth

Interfaces Wireless0

Gateway/DNS IPv4

☒ DHCP

☐ Static

Default Gateway 192.168.25.1

DNS Server 0.0.0.0

Gateway/DNS IPv6

☒ Automatic

☐ Static

Default Gateway

DNS Server

IoT Server

☐ None

☐ Home Gateway

☒ Remote Server

Server Address 192.168.3.3

User Name admin

Password admin123

Refresh

Root

Realtime Simulation

Type Color Time(sec) Periodic Num E

Cisco Packet Tracer - C:\Users\magda\Cisco Packet Tracer 8.2.2\saves\...

File Edit Options View Tools Extensions Window Help

Logical Physical x: 878, y: 401

Time: 02:35:04

ServerDHCPIadmin

Physical Config Services Desktop Programming Attributes

Web Browser

< > URL http://192.168.3.3/home.html Go Stop



IoT Server - Devices Home Conditions Editor Log Out


IoT2 (PTT081020PG-) Siren

Root

Realtime Simulation

Type Color Time(sec) Periodic Num Edit

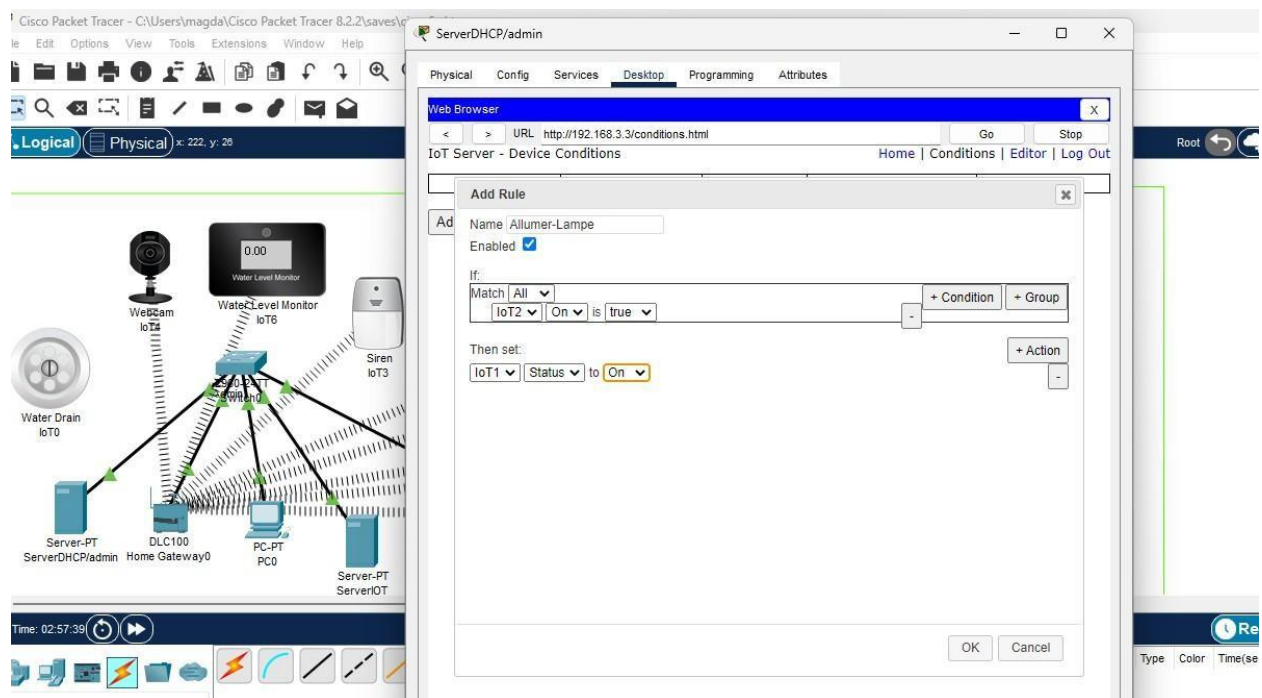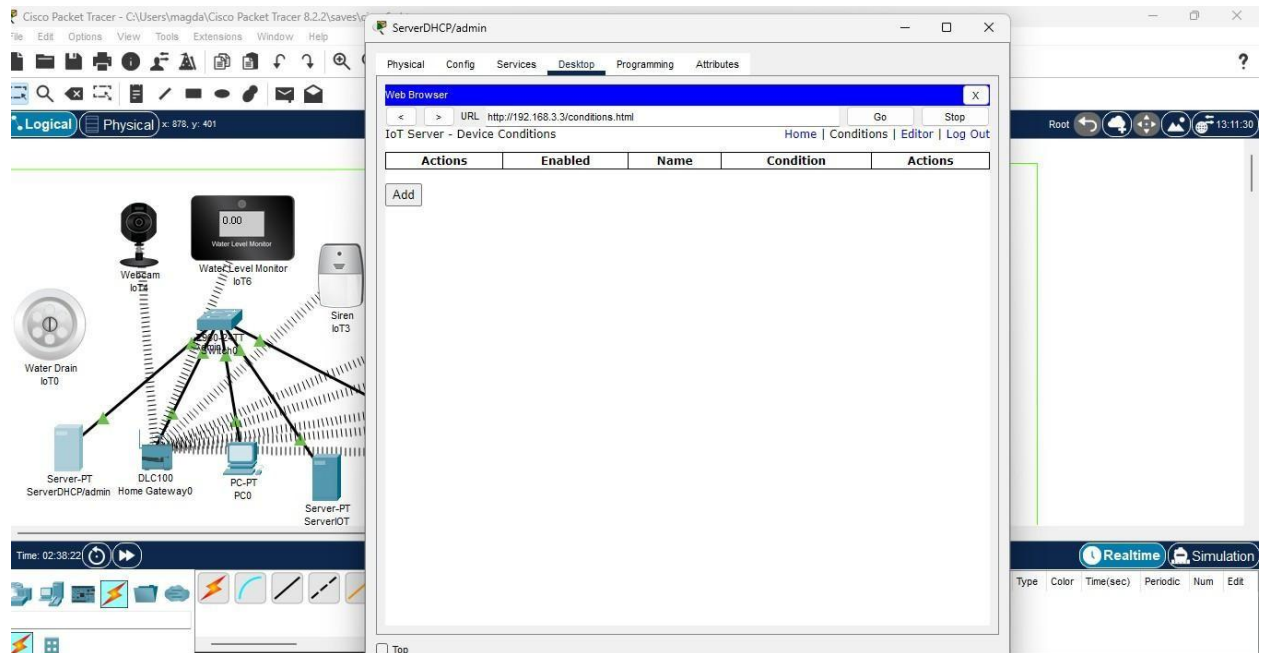

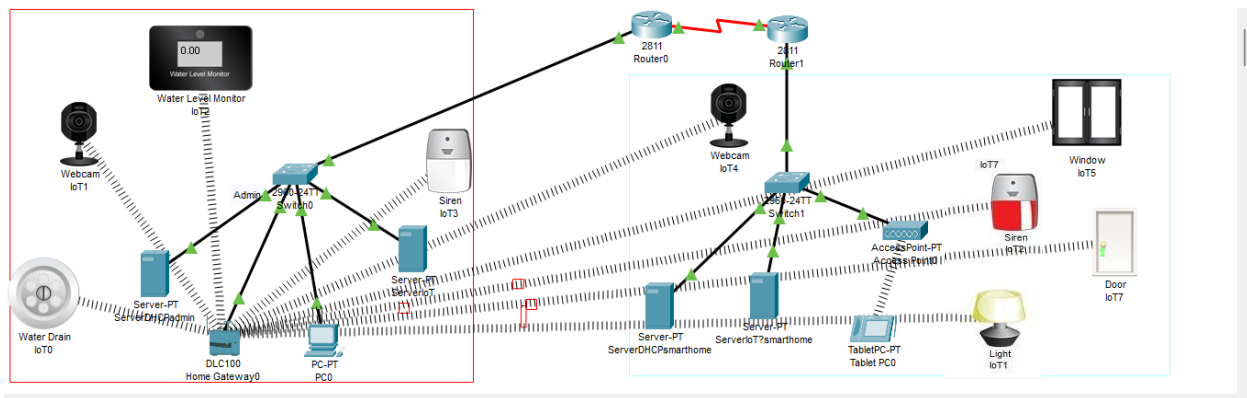

En conclusion, la réalisation de ce réseau **IoT** m'a permis de matérialiser les concepts de sécurité et d'automatiser les concepts abordés en cours.