

NAMOSIM: a Robot Motion Planner for Navigation Among Movable Obstacles

David Brown^{1,4}, Jacques Saraydaryan^{1,3,4}, Benoit Renault^{1,2,4}, and Olivier Simonin^{1,2,4}

1 Inria, CHROMA Team 2 INSA Lyon 3 CPE Lyon 4 CITI Laboratory

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#)
- [Repository](#)
- [Archive](#)

Editor: [Open Journals](#)

Reviewers:


- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

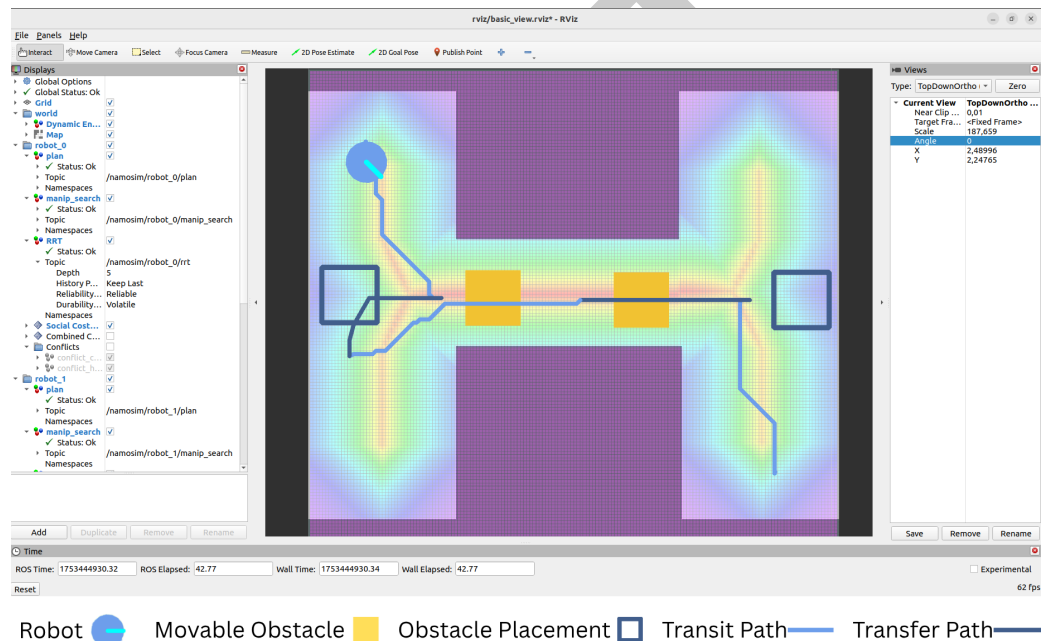

Robot Movable Obstacle Obstacle Placement Transit Path Transfer Path

Figure 1: A NAMOSIM scenario with one robot and two obstacles is visualized in RViz. The robot's plan is shown by the blue lines. The darker shade of blue indicates the part of the path involving an obstacle transfer. The empty rectangles indicate the calculated obstacle placements. The social costmap is seen in the rainbow background.

Summary

NAMOSIM is a mobile robot motion planner designed for the problem of **Navigation Among Movable Obstacles (NAMO)**. The planner simulates robots navigating in 2D polygonal environments where certain obstacles can be grasped and relocated to enable robots to reach their goals. NAMOSIM thus extends the classic navigation problem with a layer of interactivity, posing interesting research questions while remaining well-defined and amenable to various algorithmic approaches. NAMOSIM is intended for researchers and developers working on robot navigation in dynamic environments, particularly where physical interaction is necessary.

NAMOSIM supports the development of custom NAMO algorithms using a modular agent-based architecture. It includes a baseline agent that implements Stilman's NAMO algorithm (Stilman & Kuffner, 2005) and also incorporates a communication-free coordination strategy for multi-robot scenarios (Renault et al., 2024). A variety of other agent behaviors are implemented, and new agents utilizing alternative approaches can be created and integrated

19 into the planner by implementing the **Agent** base class. NAMOSIM thus supports reproducible
20 research in single and multi-robot NAMO algorithms.

21 NAMOSIM is packaged as a ROS2 package for easy integration into robotics projects and can
22 also be used as a standalone Python module. It utilizes ROS2 messages for visualization of
23 environments, plans, and execution via RViz and includes several prebuilt scenarios for testing
24 and benchmarking. Scenarios are stored as SVG files, allowing the convenient creation of
25 custom scenarios using a free SVG editor such as Inkscape.

26 Statement of Need

27 Many interesting applications in autonomous mobile robotics involve some kind of physical
28 interaction with the environment as well as social coordination with other agents. However,
29 global navigation planners typically assume static, non-interactive environments, leaving
30 higher-level behaviors to other parts of the robot software stack and thus complicating their
31 implementation. This limits the applicability of the standard navigation stack in complex
32 real-world scenarios. Ideally, motion planners should be able to reason about physical and social
33 interactions. NAMOSIM addresses this gap by offering a simulation environment explicitly
34 designed to study NAMO problems, which involve not only path planning but also reasoning
35 about which obstacles to move, where to move them, and how to combine standard navigation
36 with obstacle manipulation. Additionally, NAMOSIM supports multi-robot environments,
37 facilitating reproducible research in social navigation.

38 Major Features

39 NAMOSIM provides a robust set of features to support research and development in Navigation
40 Among Movable Obstacles (NAMO):

- 41 ■ **Modular Agent-Based Architecture:** The simulator is built around a flexible Agent inter-
42 face, allowing users to implement and test custom NAMO planning algorithms. A baseline
43 NAMO algorithm implementation is available for immediate use and benchmarking.
- 44 ■ **Support for Multiple Robot Models:** NAMOSIM supports both holonomic and differential-
45 drive robot models, enabling realistic simulation of various robotic platforms.
- 46 ■ **ROS2 Integration:** NAMOSIM forms a ROS2 package, enabling seamless integration
47 into simulated and physical robotics projects and visualization via RViz.
- 48 ■ **2D Environment Simulation:** The simulator provides a customizable 2D environment
49 where users can define static and movable obstacles, supporting complex scenarios for
50 testing multi-robot coordination strategies and NAMO algorithms.
- 51 ■ **Prebuilt Scenarios and Tests:** NAMOSIM includes several custom scenario files for
52 benchmarking and testing specific situations.
- 53 ■ **Multi-Robot Coordination:** The simulator supports multi-robot scenarios, and our
54 baseline agent implements a communication-free coordination strategy (Renault et al.,
55 2024).

56 These features make NAMOSIM a versatile tool for prototyping, evaluating, and deploying
57 NAMO algorithms in diverse robotic applications.

58 Customizable Scenarios

59 NAMOSIM environments, or **scenarios**, are stored in SVG format and can be edited using any
60 SVG editor, such as Inkscape. The scenario SVG file contains the following key elements:

- 61 ■ The geometry of the static map
- 62 ■ The polygons and orientations of all robots and movable obstacles
- 63 ■ Configuration settings that define the behavior of the environment and robots

64 The static map can also be included as an image layer within the SVG to conveniently
65 incorporate ROS grid-map images generated by standard mapping tools.

66 Architecture

67 At a high level, NAMOSIM executes a SENSE-THINK-ACT loop that performs the following
68 functions at each iteration:

- 69 1. **SENSE**: Each agent senses the environment and updates its internal representation.
- 70 2. **THINK**: Each agent computes a new plan or updates its current plan.
- 71 3. **ACT**: Each agent selects a single discrete action to execute.

72 The loop is expected to execute at a regular frequency, with the assumption that all agent
73 functions run sequentially in a synchronized manner.

74 Stilman's NAMO Algorithm

75 NAMOSIM includes a baseline implementation of Stilman's 2005 NAMO algorithm ([Stilman
76 & Kuffner, 2005](#)). The key idea of this algorithm is to move obstacles to merge disjoint
77 components of the robot's free configuration space. The map is divided into a set of disjoint
78 **connected components**, where each grid cell in a given component is reachable from all other
79 cells in the same component. It can be proven that components are separated by movable
80 obstacles or are otherwise unreachable. The algorithm functions by moving obstacles to join
81 components until the robot's current component includes the goal cell.

82 The algorithm works by recursively performing the following two stages:

- 83 1. **SELECT_OBSTACLE_AND_COMPONENT**: The first stage performs a simplified
84 A* grid search, allowing the agent to pass through movable obstacles. It returns the ID
85 of the first movable obstacle encountered on the optimal path to the goal and the ID of
86 the component encountered after passing through the obstacle.
- 87 2. **OBSTACLE_MANIPULATION_SEARCH**: The second stage finds a **transit path**
88 from the robot's current position to a grasp pose near the obstacle. Then, it finds a
89 **transfer path** by performing an obstacle manipulation search to join the robot's current
90 component to the component selected in stage 1. If this stage fails, the obstacle and
91 component pair are added to an avoid-list, and the algorithm returns to stage 1.

92 Each iteration of the algorithm continues with a copy of the environment where the robot and
93 obstacle start from the poses resulting from the previous obstacle manipulation search. See
94 also ([Renault, 2023](#)) for more details.

95 Collision Detection

96 Custom agents are free to implement their own collision detection routines; however, the
97 baseline agent detects collisions using a simple binary-occupancy grid during transit paths
98 (when not carrying an obstacle), assuming a circular robot footprint. When transporting a
99 movable obstacle, the robot footprint is non-circular, and collision detection is based on the
100 **convex swept volume** resulting from the area swept by the combined robot-obstacle footprint
101 due to the action motion. Although computationally expensive, this ensures all possible
102 collisions are detected, regardless of the shape of the robot or obstacle.

103 Social Costmap

104 A novel contribution in the baseline implementation is the option to use a social costmap
105 during the obstacle manipulation search to guide obstacle placement decisions. This allows
106 robots to place obstacles in areas less likely to block the free passage of other agents, including
107 humans, reducing the likelihood that obstacles will need to be moved again. The key heuristic

of the social costmap is to **avoid narrow corridors and central areas**, assigning higher costs to narrow corridors and the centers of open spaces. This helps robots avoid placing obstacles in front of doorways or in the center of rooms. The social costmap is explained in greater detail in (Renault et al., 2020; Renault, 2023).

Conflict Avoidance and Deadlock Resolution

NAMOSIM's baseline agent can avoid conflicts and resolve deadlocks with other agents. Conflict avoidance works by looking ahead along the agent's current plan for a fixed number of steps, called the **conflict horizon**. Within this horizon, the agent simulates each planned action and checks for potential conflicts. For example, the agent may have planned to move an obstacle that is no longer at the expected location, or another robot may be crossing the planned path within the conflict horizon, raising the potential for a collision.

The baseline agent avoids conflicts by either pausing or replanning around them. A **deadlock** is detected when the same conflict configuration is repeatedly encountered, even after replanning. To resolve deadlocks, the agent follows an evasion strategy which is optionally based on the local social costmap (Renault et al., 2024).

Acknowledgements

This research was supported by the Inria NAMOEX initiative.

References

- Renault, B. (2023). *Navigation among movable obstacles (NAMO) extended to social and multi-robot constraints* (PhD Thesis No. 2023ISAL0105, INSA Lyon). <https://hal.science/tel-04418723>
- Renault, B., Saraydaryan, J., Brown, D., & Simonin, O. (2024). Multi-robot navigation among movable obstacles: Implicit coordination to deal with conflicts and deadlocks. *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 1–7. <https://hal.science/hal-04705395>
- Renault, B., Saraydaryan, J., & Simonin, O. (2020). Modeling a social placement cost to extend navigation among movable obstacles (NAMO) algorithms. *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 11345–11351. <https://doi.org/10.1109/IROS45743.2020.9340892>
- Stilman, M., & Kuffner, J. J. (2005). Navigation among movable obstacles: Real-time reasoning in complex environments. *International Journal of Humanoid Robotics*, 2(4), 479–503. <https://doi.org/10.1142/S0219843605000545>