

# NAMOSIM: a Robot Motion Planner for Navigation Among Movable Obstacles

David Brown<sup>1,4</sup>, Jacques Saraydaryan<sup>1,3,4</sup>, Benoit Renault<sup>1,2,4</sup>, and Olivier Simonin<sup>1,2,4</sup>

1 Inria, CHROMA Team 2 INSA Lyon 3 CPE Lyon 4 CITI Laboratory

DOI: 10.xxxxxx/draft

## Software

- Review
- Repository
- Archive

Editor: Open Journals

## Reviewers:


- @openjournals

Submitted: 01 January 1970

Published: unpublished

## License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License (CC BY 4.0).

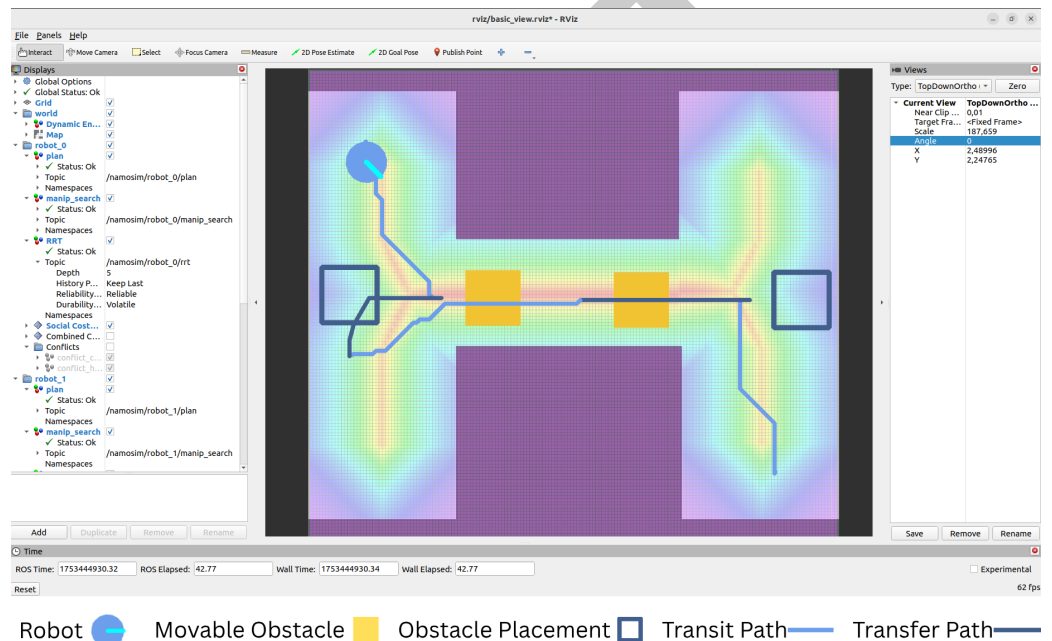

Robot (blue circle) Movable Obstacle (yellow square) Obstacle Placement (empty rectangle) Transit Path (darker blue line) Transfer Path (blue line)

**Figure 1:** A NAMOSIM scenario with one robot and two obstacles is visualized in RViz. The robot's plan is shown by the blue lines. The darker shade of blue indicates the part of the path involving an obstacle transfer. The empty rectangles indicate the planned obstacle placements. The social costmap is seen in the rainbow background.

## Summary

**NAMOSIM** is a mobile robot motion planner designed for the problem of **Navigation Among Movable Obstacles (NAMO)**. The planner simulates robots navigating in 2D polygonal environments where certain obstacles can be grasped and relocated to enable robots to reach their goals. NAMOSIM thus extends the classic navigation problem with a layer of interactivity, posing interesting research questions while remaining well-defined and amenable to various algorithmic approaches. NAMOSIM is intended for researchers and developers working on robot navigation in dynamic environments, particularly where physical interaction is necessary.

NAMOSIM supports the development of custom NAMO algorithms using a modular agent-based architecture. It includes a baseline agent that implements Stilman's NAMO algorithm (Stilman & Kuffner, 2005) and also incorporates a communication-free coordination strategy for multi-robot scenarios (Renault et al., 2024). A variety of other agent behaviors are implemented, and new agents utilizing alternative approaches can be created and integrated

19 into the planner by implementing the **Agent** base class. NAMOSIM thus supports reproducible  
20 research in single and multi-robot NAMO algorithms.

21 NAMOSIM is packaged as a ROS 2 package for easy integration into robotics projects and can  
22 also be used as a standalone Python module. It utilizes ROS 2 messages for visualization of  
23 environments, plans, and execution via RViz and includes several prebuilt scenarios for testing  
24 and benchmarking. Scenarios are stored as SVG files, allowing the convenient creation of  
25 custom scenarios using a free SVG editor such as Inkscape.

## 26 Statement of Need

27 Many interesting applications in autonomous mobile robotics involve some kind of physical  
28 interaction with the environment as well as social coordination with other agents. However,  
29 global navigation planners typically assume static, non-interactive environments, leaving higher-  
30 level behaviors to other parts of the software stack. Ideally, motion planners should be able to  
31 reason about physical and social interactions and adapt to changing conditions. NAMOSIM  
32 takes a first step to address this challenging problem by offering a simulation environment  
33 designed for experimentation with NAMO algorithms, which involve not only path planning  
34 but also reasoning about which obstacles to move, where to move them, and how to combine  
35 standard navigation with obstacle manipulation. NAMOSIM additionally supports multi-robot  
36 environments, facilitating reproducible research in social navigation.

37 While there have been several prior works on NAMO, including (Levihn et al., 2013, 2014;  
38 Scholz et al., 2016; Stilman & Kuffner, 2005; Wu et al., 2010; Zhang et al., 2023), to our  
39 knowledge, an open-source package dedicated to reproducible experimentation with NAMO  
40 algorithms in single and multi-robot environments is unavailable. NAMOSIM aims to fill this  
41 gap, and is designed for compatibility with real robot platforms and integration with the ROS  
42 ecosystem.

## 43 Major Features

44 NAMOSIM provides a robust set of features to support research and development in Navigation  
45 Among Movable Obstacles (NAMO):

- 46 ■ **Modular Agent-Based Architecture:** The simulator is built around a flexible Agent inter-  
47 face, allowing users to implement and test custom NAMO planning algorithms. A baseline  
48 NAMO algorithm implementation is available for immediate use and benchmarking.
- 49 ■ **Support for Multiple Robot Models:** NAMOSIM supports both holonomic and differential-  
50 drive robot models, enabling realistic simulation of various robotic platforms.
- 51 ■ **ROS 2 Integration:** NAMOSIM forms a ROS 2 package, enabling seamless integration  
52 into simulated and physical robotics projects and visualization via RViz.
- 53 ■ **2D Environment Simulation:** The simulator provides a customizable 2D environment  
54 where users can define static and movable obstacles, supporting complex scenarios for  
55 testing multi-robot coordination strategies and NAMO algorithms.
- 56 ■ **Prebuilt Scenarios and Tests:** NAMOSIM includes several custom scenario files for  
57 benchmarking and testing specific situations.
- 58 ■ **Multi-Robot Coordination:** The simulator supports multi-robot scenarios, and our  
59 baseline agent implements a communication-free coordination strategy (Renault et al.,  
60 2024).

61 These features make NAMOSIM a versatile tool for prototyping, evaluating, and deploying  
62 NAMO algorithms in diverse robotic applications.

## Customizable Scenarios

NAMOSIM environments, or **scenarios**, are stored in SVG format and can be edited using any SVG editor, such as Inkscape. The scenario SVG file contains the following key elements:

- The geometry of the static map
- The polygons and orientations of all robots and movable obstacles
- Configuration settings that define the behavior of the environment and robots

The static map can also be included as an image layer within the SVG to conveniently incorporate ROS grid-map images generated by standard mapping tools.

## Architecture

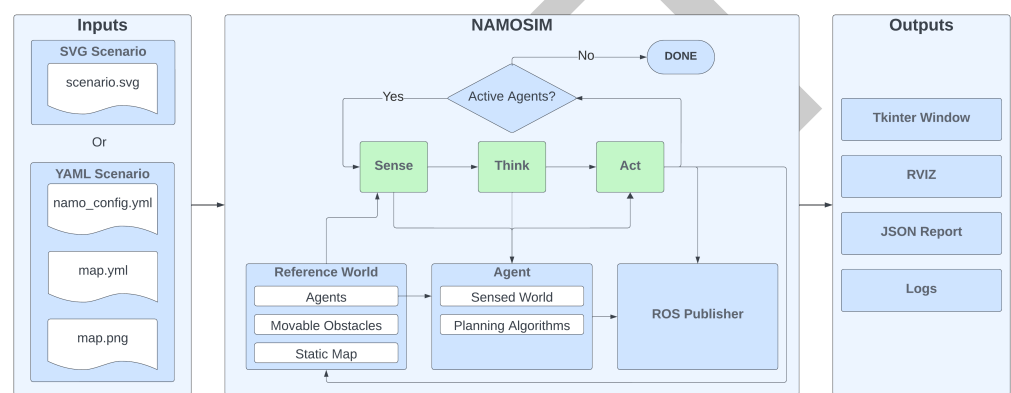


Figure 2: NAMOSIM High-Level Architecture

At a high level, NAMOSIM executes a SENSE-THINK-ACT loop that performs the following functions at each iteration:

1. **SENSE**: Each agent senses the environment and updates its internal representation.
2. **THINK**: Each agent computes a new plan or updates its current plan.
3. **ACT**: Each agent selects a single discrete action to execute.

The loop is expected to execute at a regular frequency, with the assumption that all agent functions run sequentially in a synchronized manner.

## Stilman's NAMO Algorithm

NAMOSIM includes a baseline implementation of Stilman's 2005 NAMO algorithm (Stilman & Kuffner, 2005). The key idea of this algorithm is to move obstacles to merge disjoint components of the robot's free configuration space. The map is divided into a set of disjoint **connected components**, where each grid cell in a given component is reachable from all other cells in the same component. It can be proven that components are separated by movable obstacles or are otherwise unreachable. The algorithm functions by moving obstacles to join components until the robot's current component includes the goal cell.

The algorithm works by recursively performing the following two stages:

1. **SELECT\_OBSTACLE\_AND\_COMPONENT**: The first stage performs a simplified A\* grid search, allowing the agent to pass through movable obstacles. It returns the ID of the first movable obstacle encountered on the optimal path to the goal and the ID of the component encountered after passing through the obstacle.

92 2. **OBSTACLE\_MANIPULATION\_SEARCH**: The second stage finds a **transit path**  
93 from the robot's current position to a grasp pose near the obstacle. Then, it finds a  
94 **transfer path** by performing an obstacle manipulation search to join the robot's current  
95 component to the component selected in stage 1. If this stage fails, the obstacle and  
96 component pair are added to an avoid-list, and the algorithm returns to stage 1.

97 Each iteration of the algorithm continues with a copy of the environment where the robot and  
98 obstacle start from the poses resulting from the previous obstacle manipulation search. See  
99 also (Renault, 2023) for more details.

## 100 Collision Detection

101 Custom agents are free to implement their own collision detection routines; however, the  
102 baseline agent detects collisions using a simple binary-occupancy grid during transit paths  
103 (when not carrying an obstacle), assuming a circular robot footprint. When transporting a  
104 movable obstacle, the robot footprint is non-circular, and collision detection is based on the  
105 **convex swept volume** resulting from the area swept by the combined robot-obstacle footprint  
106 due to the action motion. Although computationally expensive, this ensures all possible  
107 collisions are detected, regardless of the shape of the robot or obstacle.

## 108 Social Costmap

109 A novel contribution in the baseline implementation is the option to use a social costmap  
110 during the obstacle manipulation search to guide obstacle placement decisions. This allows  
111 robots to place obstacles in areas less likely to block the free passage of other agents, including  
112 humans, reducing the likelihood that obstacles will need to be moved again. The key heuristic  
113 of the social costmap is to **avoid narrow corridors and central areas**, assigning higher costs to  
114 narrow corridors and the centers of open spaces. This helps robots avoid placing obstacles in  
115 front of doorways or in the center of rooms. The social costmap is explained in greater detail  
116 in (Renault et al., 2020; Renault, 2023).

## 117 Conflict Avoidance and Deadlock Resolution

118 NAMOSIM's baseline agent can avoid conflicts and resolve deadlocks with other agents.  
119 Conflict avoidance works by looking ahead along the agent's current plan for a fixed number  
120 of steps, called the **conflict horizon**. Within this horizon, the agent simulates each planned  
121 action and checks for potential conflicts. For example, the agent may have planned to move  
122 an obstacle that is no longer at the expected location, or another robot may be crossing the  
123 planned path within the conflict horizon, raising the potential for a collision.

124 The baseline agent avoids conflicts by either pausing or replanning around them. A **deadlock** is  
125 detected when the same conflict configuration is repeatedly encountered, even after replanning.  
126 To resolve deadlocks, the agent follows an evasion strategy which is optionally based on the  
127 local social costmap (Renault et al., 2024).

## 128 Acknowledgements

129 This research was supported by the Inria NAMOEX initiative.

## 130 References

- 131 Levihn, M., Scholz, J., & Stilman, M. (2013). Hierarchical decision theoretic planning for  
132 navigation among movable obstacles. In E. Frazzoli, T. Lozano-Perez, N. Roy, & D. Rus  
133 (Eds.), *Algorithmic foundations of robotics x* (pp. 19–35). Springer Berlin Heidelberg.  
134 ISBN: 978-3-642-36279-8

- 135 Levihn, M., Stilman, M., & Christensen, H. (2014). Locally optimal navigation among movable  
136 obstacles in unknown environments. *2014 IEEE-RAS International Conference on Humanoid*  
137 *Robots*, 86–91. <https://doi.org/10.1109/HUMANOIDS.2014.7041342>
- 138 Renault, B. (2023). *Navigation among movable obstacles (NAMO) extended to social and*  
139 *multi-robot constraints* (PhD Thesis No. 2023ISAL0105, INSA Lyon). [https://hal.science/](https://hal.science/tel-04418723)  
140 [tel-04418723](https://hal.science/tel-04418723)
- 141 Renault, B., Saraydaryan, J., Brown, D., & Simonin, O. (2024). Multi-robot navigation  
142 among movable obstacles: Implicit coordination to deal with conflicts and deadlocks.  
143 *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 1–7. [https://](https://hal.science/hal-04705395)  
144 [hal.science/hal-04705395](https://hal.science/hal-04705395)
- 145 Renault, B., Saraydaryan, J., & Simonin, O. (2020). Modeling a social placement cost to  
146 extend navigation among movable obstacles (NAMO) algorithms. *IEEE/RSJ International*  
147 *Conference on Intelligent Robots and Systems (IROS)*, 11345–11351. [https://doi.org/10.](https://doi.org/10.1109/IROS45743.2020.9340892)  
148 [1109/IROS45743.2020.9340892](https://doi.org/10.1109/IROS45743.2020.9340892)
- 149 Scholz, J., Jindal, N., Levihn, M., Isbell, C. L., & Christensen, H. I. (2016). Navigation  
150 among movable obstacles with learned dynamic constraints. *2016 IEEE/RSJ International*  
151 *Conference on Intelligent Robots and Systems (IROS)*, 3706–3713. [https://doi.org/10.](https://doi.org/10.1109/IROS.2016.7759546)  
152 [1109/IROS.2016.7759546](https://doi.org/10.1109/IROS.2016.7759546)
- 153 Stilman, M., & Kuffner, J. J. (2005). Navigation among movable obstacles: Real-time  
154 reasoning in complex environments. *International Journal of Humanoid Robotics*, 2(4),  
155 479–503. <https://doi.org/10.1142/S0219843605000545>
- 156 Wu, H.-N., Levihn, M., & Stilman, M. (2010). Navigation among movable obstacles in  
157 unknown environments. *2010 IEEE/RSJ International Conference on Intelligent Robots*  
158 *and Systems*, 1433–1438. <https://doi.org/10.1109/IROS.2010.5649744>
- 159 Zhang, K., Lucet, E., Alexandre Dit Sandretto, J., & Filliat, D. (2023, October). Navigation  
160 among movable obstacles using machine learning based total time cost optimization.  
161 *IROS 2023 - IEEE/RSJ International Conference on Intelligent Robots and Systems*.  
162 <https://ip-paris.hal.science/hal-04250608>