

NAMOSIM: A Robot Motion Planner for Navigation Among Movable Obstacles

Benoit Renault^{2 4}, Jacques Saraydaryan^{1 3 4}, David Brown^{1 4}, and Olivier Simonin^{1 2 4}

1 Inria, CHROMA Team 2 INSA Lyon 3 CPE Lyon 4 CITI Laboratory

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- Review [↗](#)
- Repository [↗](#)
- Archive [↗](#)

Editor: [Open Journals](#) [↗](#)

Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

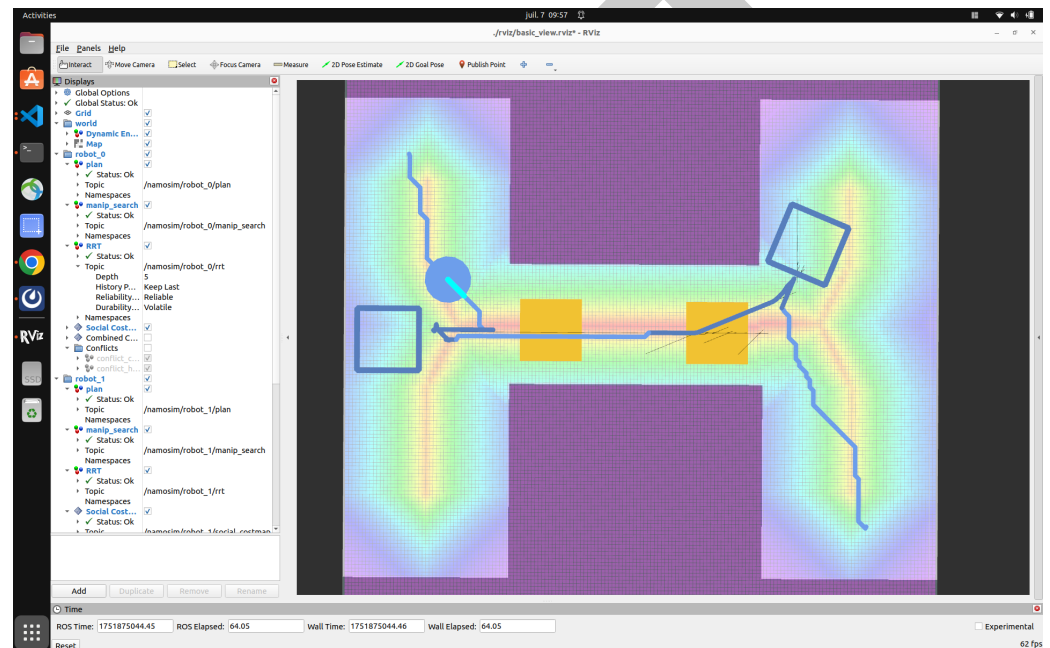


Figure 1: NAMOSIM

Summary

NAMOSIM is a robot motion planning simulator designed for the Navigation Among Movable Obstacles (NAMO) problem. It enables simulation and evaluation of motion planning strategies in 2D environments where certain obstacles can be manipulated by robots to reach their goals. The simulator includes support for holonomic and differential drive models, and integrates with ROS2 for seamless use in both simulated and real robotic platforms.

NAMOSIM provides a modular agent-based architecture, including a baseline implementation of the well-known Stilman2005 NAMO planner. New planning strategies can be implemented via a clean Agent interface, facilitating experimentation and benchmarking. The system includes full ROS2 compatibility, allowing visualization of plans using RViz2, as well as utilities for testing and documentation generation.

This software is intended for researchers, educators, and developers working on robot navigation in dynamic environments, particularly where physical interaction with the environment is necessary.

Statement of need

Most navigation planners assume static environments and non-interactive environments, limiting their usefulness in complex real-world applications. NAMO problems involve not only path planning but also introduce the need for reasoning about which obstacles to move, where to move them, and how to combine standard navigation with obstacle manipulation. NAMOSIM addresses this by offering a simulation environment explicitly designed to study and prototype NAMO algorithms. NAMOSIM additionally supports multi-robot environments and thus facilitates reproducible research in multi-robot navigation among movable obstacles (MR-NAMO).

Major Features

NAMOSIM provides a robust set of features to support research and development in Navigation Among Movable Obstacles (NAMO):

- **Modular Agent-Based Architecture:** The simulator is built around a flexible Agent interface, allowing users to implement and test custom NAMO planning algorithms. A baseline implementation of the Stilman2005 planner is included for immediate use and benchmarking.
- **Support for Multiple Robot Models:** NAMOSIM supports both holonomic and differential drive robot models, enabling realistic simulation of various robotic platforms.
- **ROS2 Integration:** Full compatibility with ROS2 allows seamless deployment on both simulated and physical robots, with built-in support for visualization in RViz2 and integration with ROS2 navigation stacks.
- **2D Environment Simulation:** The simulator provides a customizable 2D environment where users can define static and movable obstacles, supporting complex scenarios for testing navigation and manipulation strategies.
- **Extensive Testing and Documentation Utilities:** NAMOSIM includes tools for automated testing of planning algorithms and generating comprehensive documentation, facilitating reproducible research and educational use.
- **Multi-Robot Coordination:** The simulator supports multi-robot scenarios, enabling the study of implicit coordination and conflict resolution in NAMO tasks, as explored in related research (Renault et al., 2024).

These features make NAMOSIM a versatile tool for prototyping, evaluating, and deploying NAMO algorithms in diverse robotic applications.

Customizable Scenarios

Namosim environments, or **scenarios**, are stored in SVG format and can be edited using any SVG editor such as Inkscape. The scenario SVG file contains the following key elements:

- The geometry of the static map
- The polygons and orientations of all robots and movable obstacles
- Configuration settings that define the behavior of the environment and robots.

The static map can also be included as an image layer inside the SVG to conveniently include ROS grid-map images generated by standard mapping tools.

Architecture

At a high-level, Namosim executes a SENSE-THINK-ACT loop that performs the following functions at each iteration:

- 63 1. SENSE: Each agent senses the environment and updates its internal representation of it.
- 64 2. THINK: Each agent computes a new plan or updates its current plan.
- 65 3. ACT: Each agent selects a single discrete action to execute.

66 The loop is expected to execute at a regular frequency with the assumption that all agent
67 functions are synchronized at run sequentially.

68 Collision Detection

69 Custom agents are free to implement their own collision detection, however our baseline
70 Stilman2005 agent detects collisions using a simple binary-occupancy grid when the robot
71 footprint is circular. However, when transporting a movable obstacle, the robot footprint is
72 non-circular, and collision detection is based on the convex-swept-volume of the combined
73 robot-obstacle footprint's motion to guarantee all possible collisions are detected.

74 Conflict Avoidance and Deadlock Resolution

75 The baseline Stilman2005 agent has the capability to avoid conflicts and attempt to resolve
76 deadlocks. Conflict avoidance works by looking ahead along the agent's current plan for a
77 fixed number of steps, called the **conflict horizon**. Within the horizon, the agent simulates
78 each planned action and checks for a number of possible conflicts. For example, the agent
79 may have planned to move a certain obstacle which has been moved by another robot and
80 is no longer at the expected location. Or as another example, an action within the conflict
81 horizon may collide with another robot that currently crossing the planned path.

82 The Stilman2005 agent avoids conflicts by either pausing or planning around them. A
83 deadlock is detected when a given conflict configuration is re-detected multiple times, even
84 after replanning. To resolve deadlocks, the agent follows an evasion strategy as described in
85 our IROS-2024 paper [1].

86 The Core NAMO Algorithm

87 The core NAMO algorithm implemented in our Stilman2005 agent, is based on the idea of
88 moving obstacles in order to merge disjoint components of the robot's configuration space.
89 The map is divided into a set of disjoint connected-components where each cell in a given
90 component is reachable from all the other cells in the same component. The connected-
91 components must be separated from each other by movable obstacles, otherwise they are
92 unreachable. The agent's goal is to move obstacles in order to join different components to
93 open a path to the goal.

94 The algorithm computes a plan by recursively performing the following two stages:

- 95 1. **SELECT_OBSTACLE_AND_COMPONENT**: The first stage performs a simplified
96 A* grid search where the agent is allowed to pass through movable obstacles. It returns
97 the ID of the first movable obstacle encountered on the path to the goal and the ID of
98 the component encountered after passing through the obstacle.
- 99 2. **OBSTACLE_MANIPULATION_SEARCH**: The second stage first finds a **transit path**
100 from the robot's current position to a grasp pose near the obstacle. Then it finds
101 a **transfer path** by doing an obstacle manipulation search to join the robot's current
102 component to the component selected in stage 1. If this stage fails for any reason, the
103 obstacle and component pair are added to an avoid-list and the algorithm goes back to
104 stage 1.

105 This algorithm is explained in full detail in [3].

106 **Acknowledgements**

107 This project was developed by the CHROMA team at the CITI Laboratory, INSA Lyon, in
108 collaboration with Inria. It is part of ongoing research into autonomous navigation, multi-robot
109 systems, and human-aware robotics.

110 **References**

- 111 Renault, B., Saraydaryan, J., Brown, D., & Simonin, O. (2024). Multi-Robot Navigation among
112 Movable Obstacles: Implicit Coordination to Deal with Conflicts and Deadlocks. *IEEE/RSJ*
113 *International Conference on Intelligent Robots and Systems (IROS)*. [https://hal.science/hal-](https://hal.science/hal-04705395)
114 [04705395](https://hal.science/hal-04705395)
- 115 Renault, B., Saraydaryan, J., & Simonin, O. (2020). Modeling a Social Placement Cost to
116 Extend Navigation Among Movable Obstacles (NAMO) Algorithms. *IEEE/RSJ IROS 2020*.
117 <https://doi.org/10.1109/IROS45743.2020.9340892>
- 118 Benoit Renault. NAVigation en milieu MODifiable (NAMO) étendue à des contraintes sociales
119 et multi-robots. Robotique [cs.RO]. INSA de Lyon, 2023. Français. NNT : 2023ISAL0105 .
120 tel-04418723v2