PANS-OPS
INSTRUMENT APPROACH CHART


AD ELEV 229

ILS RWY 25
BUECKEBURG (ETHB)


BREMEN RADAR	BUECKEBURG RADAR	BUECKEBURG TOWER
259.725 119.490	389.450 124.505	341.250 140.400 123.240

LOCALIZER	APP COURSE	GS	DA	THR ELEV	ALS-LENGTH	LDA
IBBW 111.550	254°	3.2°	**See CAT**	213	900 M	6010

NOTE:
a) GNSS REQUIRED.
b) NON RNAV EQUIPPED ACFT: EXPECT RADAR VECTORS.
c CIRCLING NOT AUTHORIZED SOUTH OF RWY.
d MISSED APCH PDG MIN. 4%.

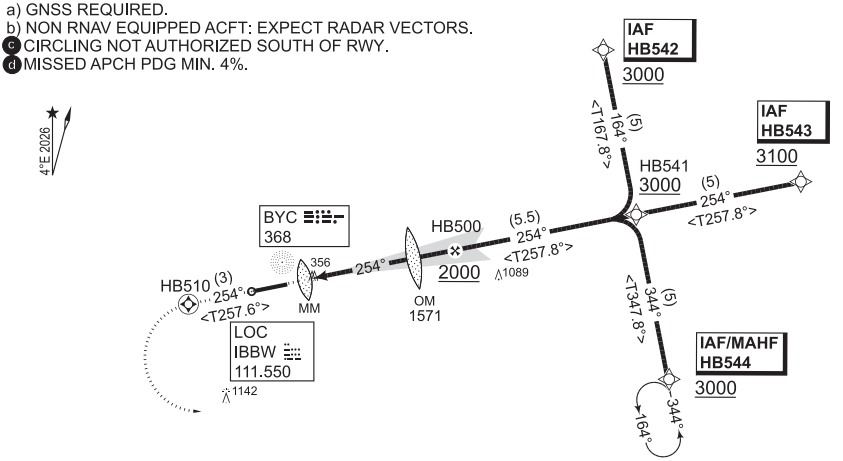

MSA BYC 25 NM




IFR PROFILES WITHIN
AIRSPACE CLASS "E"
WATCH OUT FOR VFR
TRAFFIC UNKNOWN TO ATC.

EMERG SAFE ALT 100 NM 6100

MISSED APPROACH d **TA 5000**

Climb on track 254° to HB510. Turn left
direct to HB544, climb to 3000 ft or above.
HB510 [M254;L]→HB544 [A3000+]

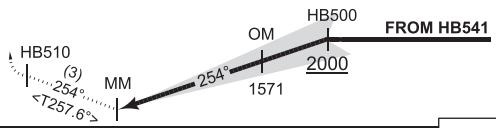

	CATEGORY	A	B	C
MPS	ILS 25 MA 2.5%	**753** - 1.5 540 (600-1.5)	**766** - 1.5 553 (600-1.5)	**774** - 1.9 561 (600-1.9/2.4)
MPS	ILS 25 MA 4%	**486** - 0.8/600 273 (300-0.8/1.3)	**498** - 0.8/650 285 (300-0.8/1.4)	**506** - 0.8/650 293 (300-0.8/1.4)
MPS	c CIRCLING	**820** - 2.7 591 (600-2.7)	**1020** - 3.6 791 (800-3.6)	**1170** - 4.3 941 (1000-4.3)

CHANGE: TWR FREQ, HOLDING (106/26); MINIMA (124/26)

ACC 11 JUN 2026