PANS-OPS
INSTRUMENT APPROACH CHART

AD ELEV 39


RNP RWY 08
HOHN (ETNH)

HOHN TWR	HOHN RADAR	BREMEN RADAR
336.375 141.700 123.710	240.725 141.100 128.380	299.100 124.075

APP COURSE	FAF ALT	GS	DA / MDA	THR ELEV	ALS-LENGTH	LDA
075°	1500	3° / 5.2%	**See CAT**	26	900 M	8004

NOTE:
a) GNSS REQUIRED.
b) PROCEDURE LIMITED TO 220 KIAS MAX.
c) BARO/VNAV NOT AUTHORIZED BELOW -30°C.
d) NO TURN BEFORE MAPT.


IFR PROFILES WITHIN AIRSPACE CLASS "E" WATCH OUT FOR VFR TRAFFIC UNKNOWN TO ATC.

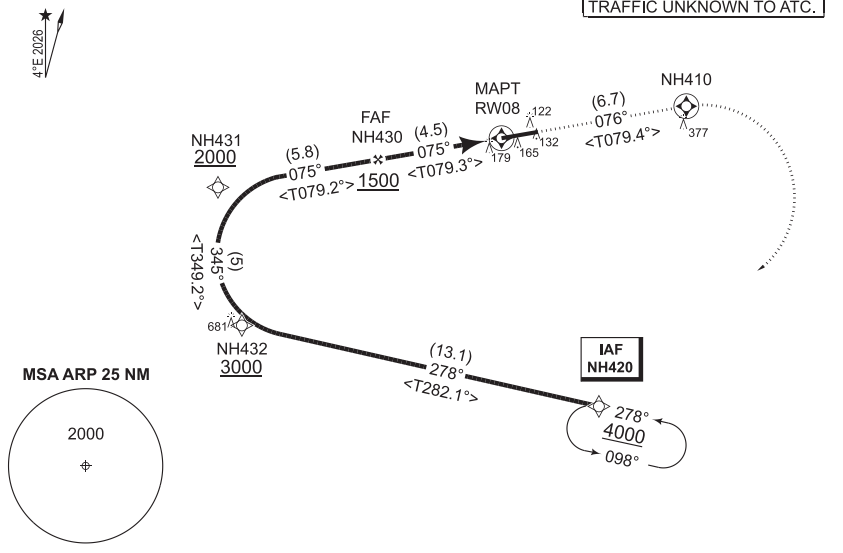

EMERG SAFE ALT 100 NM 2500

TA 5000

MISSED APPROACH
Climb on track 076° to NH410. Turn right direct NH420, climb to 4000 ft.
NH410 [M076;R], → NH420 [A4000]

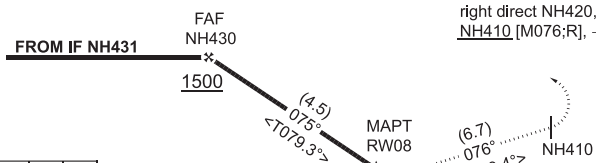

Distance THR	4,5	4	3	2
Altitude	1500	1300	1000	700

4.5 — THR ELEV 26

TCH 50
NO LIGHTS

	CATEGORY	A	B	C	D	E
MIPS	LNAV	**430** - 1.2 404 (500-1.2/1.5)		**430** - 1.2 404 (500-1.2/1.9)		
	LNAV / VNAV	**309** - 0.8 650 283 (300-0.8/1.4)	**321** - 0.8 650 295 (300-0.8/1.4)	**329** - 0.8 700 303 (400-0.8/1.4)	**339** - 0.8 700 313 (400-0.8/1.4)	**358** - 0.8 800 332 (400-0.8/1.5)

CHANGE: VAR, FREQ, MA (063/26)

ACC 16 APR 2026