PANS-OPS
INSTRUMENT APPROACH CHART

AD ELEV 39

RNP RWY 26
HOHN (ETNH)


HOHN TWR			HOHN RADAR			BREMEN RADAR	
336.375	141.700	123.710	240.725	141.100	128.380	299.100	124.075

APP COURSE	FAF ALT	GS	DA / MDA	THR ELEV	ALS-LENGTH	LDA
255°	1800	3° / 5.2%	**See CAT**	38	900 M	8004

NOTE:
a) GNSS REQUIRED.
b) PROCEDURE LIMITED TO 220 KIAS MAX.
c) BARO/VNAV NOT AUTHORIZED BELOW -30°C.
d) NO TURN BEFORE MAPT.

IFR PROFILES WITHIN AIRSPACE CLASS "E" WATCH OUT FOR VFR TRAFFIC UNKNOWN TO ATC.


4°E 2026

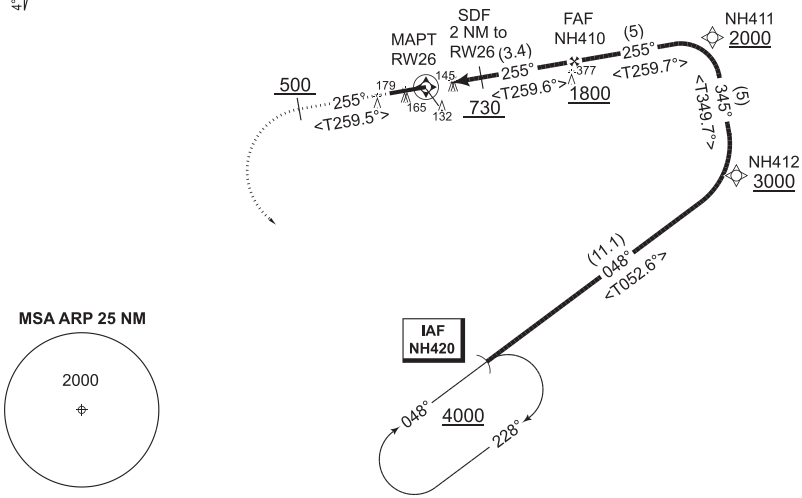

EMERG SAFE ALT 100 NM 2500

MISSED APPROACH
Climb on track 255° to 4000 ft. When passing 500 ft turn left direct to NH420.
M256 [A500;L], → NH420 [A4000]

TA 5000

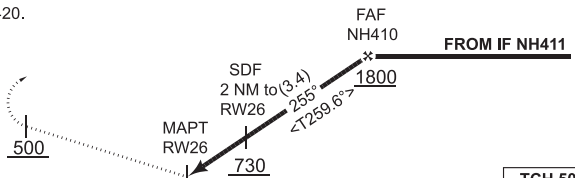

Distance THR	2	3	4	5	5.4
Altitude	730	1000	1300	1600	1800

	CATEGORY	A	B	C	D	E
MIPS	LNAV	**400** - 1.0 362 (400-1.0/1.5)		**400** - 1.0 362 (400-1.0/1.7)		
	LNAV / VNAV	**275** - 0.8 550 237 (300-0.8/1.2)	**288** - 0.8 550 250 (300-0.8/1.3)	**295** - 0.8 600 257 (300-0.8/1.3)	**305** - 0.8 600 267 (300-0.8/1.3)	**324** - 0.8 650 286 (300-0.8/1.4)

CHANGE: VAR, FREQ, TRACKS, MA (063/26)

ACC 16 APR 2026