PANS-OPS
INSTRUMENT APPROACH CHART

AD ELEV 187

RNP RWY 02
WUNSTORF (ETNW)


BREMEN RADAR	WUNSTORF RADAR	WUNSTORF TOWER
259.725 119.490	389.400 124.655 123.300	356.100 132.055

APP COURSE	FAF ALT	DESCENT GR	MDA	THR ELEV	ALS-LENGTH	LDA
023°	2000	3.0° / 5.2%	**See CAT**	179	774 M	5573

NOTE:
a) NAVIGATION SENSOR: GNSS ONLY.
b) NAVIGATION SPECIFICATION:
RNAV 1 UNTIL NW621, RNP APCH THEREAFTER.
c BARO-VNAV NOT AUTHORIZED BELOW -30°C.
d NO TURN BEFORE MAPT.

4°E 2025


IFR PROFILES WITHIN AIRSPACE CLASS "E" WATCH OUT FOR VFR TRAFFIC UNKNOWN TO ATC.

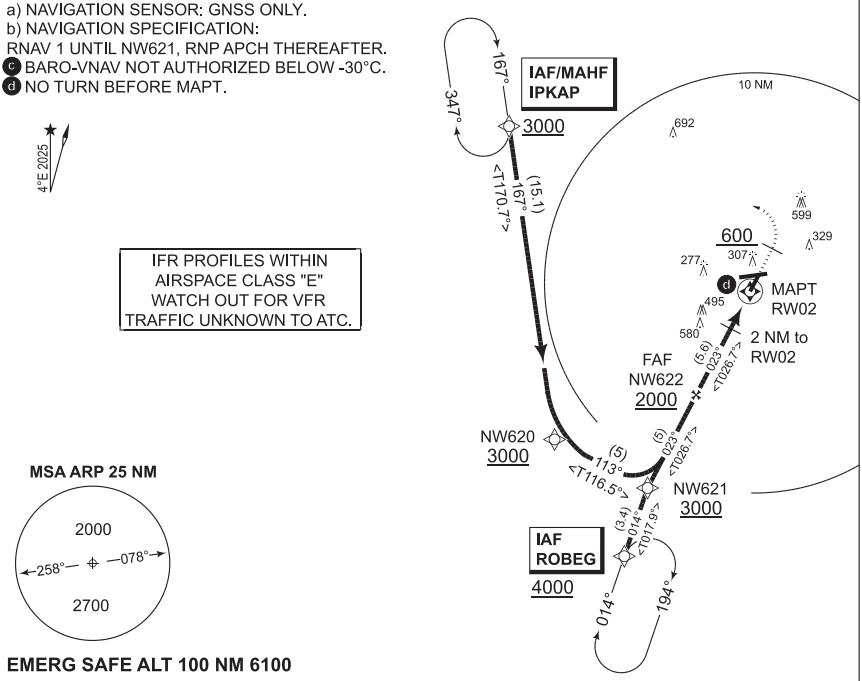

MSA ARP 25 NM

EMERG SAFE ALT 100 NM 6100

TA 5000

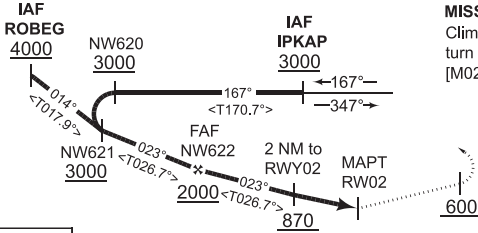

MISSED APPROACH
Climb on track 023° at or above 600 ft, turn left direct to IPKAP, climb to 3000 ft.
[M023 A600+;L]→IPKAP [A3000+]

Distance THR	5	4	3	2	1
Altitude	1810	1490	1180	870	550

TCH 50

CAT I — 5.56 — THR ELEV 179

CATEGORY	A	B	C	D
LNAV	**590** - 1.2 411 (500-1.2/1.5)		**590** - 1.2 411 (500-1.2/1.9)	
LNAV/VNAV c	**432** - 0.8 253 (300-0.8/1.3)	**444** - 0.8 265 (300-0.8/1.3)	**453** - 0.8 274 (300-0.8/1.3)	**463** - 0.8 284 (300-0.8/1.4)
CIRCLING	**680** - 2.3 493 (500-2.3)	**790** - 2.8 603 (700-2.8)	**1000** - 3.8 813 (900-3.8)	**1160** - 4.5 973 (1000-4.5)

MIPS

CHANGE: REVISED CHART (163/25)

ACC 25 DEC 2025