PANS-OPS
INSTRUMENT APPROACH CHART

AD ELEV 187


RNP RWY 08
WUNSTORF (ETNW)

BREMEN RADAR		WUNSTORF RADAR			WUNSTORF TOWER	
259.725	119.490	389.400	124.655	123.300	356.100	132.055

APP COURSE	FAF ALT	DESCENT GR	MDA	THR ELEV	ALS-LENGTH	LDA
078°	2000	3.0° / 5.2%	**See CAT**	171	900 m	7385

NOTE:

a) NAVIGATION SENSOR: GNSS ONLY.
b) NAVIGATION SPECIFICATION: RNAV 1 UNTIL NW506, RNP APCH THEREAFTER.
C) BARO-VNAV NOT AUTHORIZED BELOW -15°C.
d) EXPECT SHORTCUTS FROM NW501/NW520 TO NW506
OR NW502/NW521 TO NW505 AS FAR AS TRAFFIC PERMITS.
e) PROCEDURE LIMITED TO 230 KIAS.

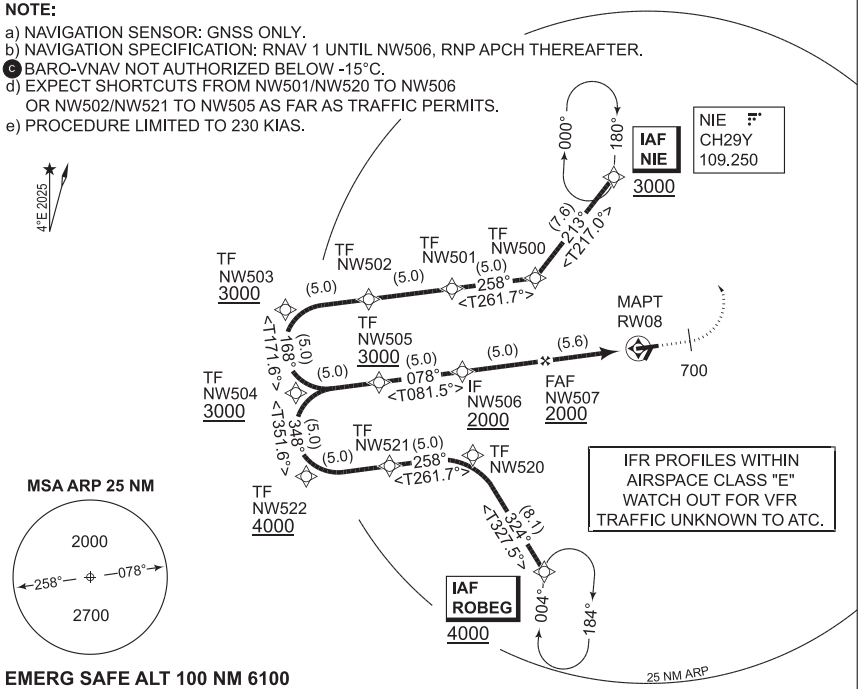


EMERG SAFE ALT 100 NM 6100

MISSED APPROACH

Climb straight ahead to 3000 ft. When passing 700 ft turn left direct to NIE.
[A700;L] → NIE [A3000]

Dist THR	5	4	3	2	1
Altitude	1810	1490	1170	850	530

TA 5000

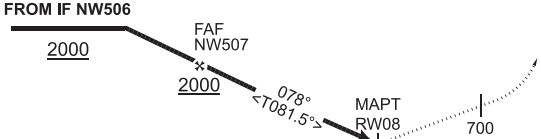

TCH 50
CAT I
5.59
THR ELEV 171

CHANGE: CIRCLING MINIMA (187/26)

MIPS	CATEGORY	A	B	C	D
	LNAV	**550** - 1.1 379 (400-1.1/1.8)		**550** - 1.1 379 (400-1.1/2.4)	
	LNAV/VNAV C	**429** - 0.8 258 (300-0.8/1.5)	**441** - 0.8 270 (300-0.8/1.5)	**449** - 0.8 278 (300-0.8/2.4)	**460** - 0.8 289 (300-0.8/2.4)
	CIRCLING	**680** - 2.3 493 (500-2.3)	**790** - 2.8 603 (700-2.8)	**1000** - 3.8 813 (900-3.8)	**1160** - 4.5 973 (1000-4.5)

ACC 01 OCT 2026