Manual of ASWMS

Ge Jin[1] and James Gaherty[1]

[1]Lamont Doherty Earth Observatory, Columbia University

May 16, 2014

Contents

1 Introduction

This package is developed to measure the phase and amplitude of surface waves from the raw waveforms, and to generate phase velocity maps via Eikonal and Helmholtz equations. The detailed theoritical development of this package can be found in Jin and Gaherty, 2014.

From Section 2 to Section 5 we present you a quick work flow to set up this system on your computer, and adjust the parameters to fit your project. This setup should give a good initial result for most teleseismic studies with the array size ranging from 100 km to continual scale, and with the station spacing smaller than 100 km. You can refer to Section 7 if you want to make more customized adjustment for better result.

In this manual, the names of files and folders are written in blue and the names of variables are written in orange. All the adjustable parameters in this package are stored in the setup_parameters.m, and the input data should be put in the folder eventmat.

The ASWMS package is written in Matlab, and requires these toolboxes:

```
Curve Fitting Toolbox (for lsqcurvefit.m)
Signal Processing Toolbox   Statistics Toolbox
Mapping Toolbox
Statistics Toolbox
```

The Statistics Toolbox is not needed if users download the NaN suite and include all of its *.m files in the /matgsdf directory.

```
http://www.mathworks.com/matlabcentral/fileexchange/6837-nan-suite/
content/nansuite.
```

2 Data Preparation

Users can either use existing SAC files and convert them to the required .mat format (Section 2.2) or use the data_download.m included in the ASWMS package which will download and format data using irisFetch.m (Section 2.3).

2.1 Data Structure

The input data are event-based matlab structure saved in mat files, which should be put in the folder eventmat. The filename for each event should follow the rule of YYYYMMD-Dhhmm_comp.mat, for example: 200901081921_LHZ.mat, and the structure name has to be event.

Here shows an example of this structure:

```
event =
        evla:  10.2152
        evlo:  -84.2159
       otime:  6.3399e+10
          id:  '200901081921'
    otimestr:  '08-Jan-2009  19:21:34'
     stadata:  [1x654  struct]
```

In which the field otime is the number of seconds to a certain time, which the actual time is not critical. We used 1970-01-01 in the sac version, and 0000-01-01 in the IRIS version, but it has to be consist in the whole project.

The field stadata contains the waveform and megadata from each stations, here is an example:

```
event.stadata(1) =

       stla:  32.8920
       stlo:  -116.4223
       stel:  1.8750
       dist:  4.1447e+03
      otime:  6.3399e+10
      delta:  1
       data:  [7200x1  double]
        cmp:  'LHZ'
       stnm:  'MONP2'
```

The stadata.otime has to have the same origin time as the event.otime, and has to have the unit in seconds. The stadata.dist has the unit of km, and delta is the sample interval in seconds.

Rather than writing your own code to transfer your data into the matlab structure, we provide two alternative methods.

2.2 Using SAC files

The script sac2eventmat.m can be used to transfer SAC files into the eventmat files.

The input SAC files have to be stored in the folder sacdata. Each event should have its own folder with the folder's name as YYYYMMDDhhmm. The file name should include the components name defined in setup_parameters.m and end with ".sac". Here shows an example:

```
>>ls  sacdata
200801011855
200801051101
200801051144
200801070312
...
...
```

3

```
>>ls  sacdata/200801011855
200801011855.TA.G09A.LHZ.sac
200801011855.TA.G10A.LHZ.sac
200801011855.TA.G11A.LHZ.sac
200801011855.TA.G14A.LHZ.sac
...
...
```

The origin time of each sac file has to be the origin time of the earthquake, while the waveform starting time can be different. Each sac file should have the following information in its header:

Event information: NZYEAR NZHOUR NZMIN NZSEC NZMSEC EVLA EVLO EVDP

station information: STLA STLO STEL KSTNM

data information: B DELTA KCMPNM

An ASCII file named eventlist with all the names of event folders should be put in the sacdata folder as well. An example of this file is:

```
>>cat  sacdata/eventlist
200801011855
200801051101
200801051144
200801070312
...
...
```

You can easily generate this file by using the shell pipe function.

2.3 Using IRIS DMC Service

The ASWMS package can directly look up event information and download waveform data from IRIS DMC by using the matlab script data_download.m. This script utilizes the DMC's Matlab interface irisFetch.m. For more details of this service please visit IRIS website:

```
http://www.iris.edu/dms/nodes/dmc/software/downloads/irisFetch.
m
```
, or Google: irisFetch.

The following parameters in the setup_parameters.m should be adjusted if you want to use this service.

```
% parameters for data downloading (if using IRIS DMC)
parameters.start_time = '2009−01−07 00:00:00';
parameters.end_time = '2009−06−08 00:00:00';
parameters.is_use_timestamp = 1;
```

```
parameters.network = '_US-ALL';
parameters.minMw = 6;
parameters.maxdepth = 50;
parameters.datalength = 7200;  % in second
parameters.resample_delta = 1; % in second
```

If the parameters.end_time is empty (''), then the end time of the data fetching will be 4 days before the current date. If the is_use_timestamp is 1, then after each successful run of the data_download.m, it will save the end time of this run into a mat file named tempstamp.mat. So the next time data_download.m is triggered, it will start from where the last run left off. This option is useful for setting up a self-updated system.

The station network can be '*' to fetch all the channels available in the region.

In the case of LHZ component is not available, the user can download the BHZ component and resample the data with the sample interval defined by parameters.resample_delta.

The downloaded data are stored in the folder datacache first before they are further processed. It skips the files already existing in this folder to avoid repeat download and save running time (actually, most of the scripts in this program have this feature). Then the station responses are removed, and the data are organized and transformed into the event matlab structure in the folder eventmat.

3   Parameter Adjustment

All the adjustable parameters are defined in the different sections in the setup_parameters.m, and most of them are under the hood and do not need to be changed for most of the teleseismic based projects.

Here is a list of the key parameters that should be changed for each project, with their initial values chosen for the USArray project:

```
parameters.proj_name = 'USArrayExample';
parameters.component = 'LHZ';    % determined by filenames
parameters.lalim =[25  50];
parameters.lolim =[-125  -65];
parameters.gridsize =0.3;    % in degrees
```

where the proj_name can be any string. The component should be included in the sac filenames (if you are using sac as input); it is also shown in the names of the output files. It is recommended to be "LHZ" for teleseismic Rayleigh-wave projects. The lalim, lolim and gridsize define the bounds of the tomorgraphy grid and output files and figures. The final output grid will be defined as:

```
xnode = lalim(1): gridsize : lalim(2);
ynode = lolim(1): gridsize : lolim(2);
[xi yi] = ndgrid(xnode, ynode);
```

Another group of parameters that frequently need to be adjusted are the periods and the smoothing weight in each period (smweight_array). The periods are defined as:

```
parameters.periods = [20 25 32 40 50 60 80 100];  % in seconds
```

which are the central frequencies of the narrow-band filters. The width of the narrow-band filters around 10% of the central frequency and are defined by min_width and max_width.

And the smoothing weight is defined for each period as:

```
parameters.smweight_array = 3*[0.4 0.3 0.2 0.2 0.2 0.5 1 2];
```

It should have the same length as parameters.periods, with smaller value for the frequency bands with higher SNR or short wavelengths. More details on the smoothing parameters can be found in the Section 7. The example presented here shows a good ratio for the periods listed above, and you may only need to change the constant (3 in this case) for your project.

For most projects, changing these parameters should be able to provide you a good initial result. We will discuss other adjustable parameters in the Section 7.

4   Run the Scripts

After the data have been prepared and parameters adjusted, you can start to run this program and get an initial result. The main sequence of the commands is listed in main_driver.m. You can go ahead and run it after you modify it by choosing one of the data preparation methods.

Here we briefly list these commands and describe their function and input/output. We will discuss them in details in the Section 7.

1. sac2eventmat.m OR data_download.m
   choose one of your data preparation method, or build your own.
   Input: sac files/NaN Output: eventmat/*.mat

2. cleanup_events.m
   This script finds and deletes the events in the eventmat folder that are close in time whose surface waves may interfere with each other at the array location.
   Input: eventmat/*.mat Output: NaN

3. run_autowinpick.m
   This script will define the window function to isolate the energy of surface waves. It creates a new field winpara in the event structure, and also generates a ASCII file in the folder winpara. If you want the window to be recalculated, you need to delete the files in winpara.
   Input: eventmat/*.mat Output: winpara/* eventmat/*.mat

4. gsdfmain.m
   This script measures the phase delay between nearby stations using cross-correlation. It is the core part of the entire program. For each event, it generates an structure named

eventcs and saves it to the folder CSmeasure.
Input: eventmat/*.mat Output: CSmeasure/*.mat

5. eikonal_eq.m
This script performs the tomography inversion via Eikonal equation, based on the cross-correlation measurements. It generates a structure named eventphv, which contains the apparent phase velocity maps for each event, and save it to the folder eikonal.
Input: CSmeasure/*.mat Output: eikonal/*.mat

6. stack_phv.m
This script stacks all the events in the folder eikonal, output a structure avgphv containing stacked apparent phase velocity map, and saves it to the file eikonal_stack_LHZ.mat. It would be the final result if the amplitude correction is not applied.
Input: eikonal/*.mat Output: eikonal_stack_LHZ.mat

7. helmholtz_eq.m
This script applies the amplitude correction on the apparent phase-velocity results via Helmholtz equation. It generates a structure named helmholtz, which is stored in the folder helmholtz.
Input: eikonal/*.mat CSmeasure/*.mat eikonal_stack_LHZ.mat Output: helmholtz/*.mat

8. stack_helm.m
This script stacks the corrected phase velocity maps from each event and generates the final result, as a structure named avgphv, and save it to the file helmholtz_stack_LHZ.mat.
Input: helmholtz/*.mat Output: helmholtz_stack_LHZ.mat

5 Reviewing the Result

5.1 Output Format

The final result is stored in helmholtz_stack_LHZ.mat. If helmoltz_eq.m was not run/commented out in main_driver.m, then the final results are in eikonal_stack_LHZ.mat. However, the structures avgphv in these two files have the same structure, only the one in eikonal_stack_LHZ.mat does not contain the correction related fields. Here we only present the structure in the helmholtz_stack_LHZ.m Each of the binary *.mat output files used for figures are also given as ASCII *.xyz files.

Here shows an example of avgphv:

```
avgphv(4) =


        sumV: [84x201 double]
    sumV_cor: [84x201 double]
   sumweight: [84x201 double]
      GV_std: [84x201 double]
  GV_cor_std: [84x201 double]
    eventnum: [84x201 double]
          xi: [84x201 double]
```

```
      yi:  [84 x201  double ]
   xnode:  [1 x84  double ]
   ynode:  [1 x201  double ]
  period:  40
  GV_cor:  [84 x201  double ]
      GV:  [84 x201  double ]
```

where the important fields are:

xi Latitude of the grid.

yi Longitude of the grid.

GV Phase velocity before amplitude correction.

GV_cor Phase velocity after amplitude correction.

eventnum Number of events each grid stacked.

5.2 Result Visualization

There are map plotting scripts contained in the stack_phv.m and stack_helm.m, which can be actived by changing the variable isfigure to 1 at the beginning of these two files. You can also refer them to plot your own figures. Here shows an simple example of plotting the result:

```
load  helmholtz_stack_LHZ.mat
ip = 4;  % plot the 40s result
figure (88)
clf
ax = worldmap ( lalim , lolim )
surfacem ( avgphv ( ip ). xi , avgphv ( ip ). yi , avgphv ( ip ). GV_cor );
% set the color scale
cmap = colormap ('jet ');
cmap = flipud (cmap );
colormap (cmap );
% set the color range
r = 0.1;  % 20 % peak to peak
meanphv = nanmean ( avgphv ( ip ). GV_cor (:));
caxis ([ meanphv *(1-r)  meanphv *(1+r )]);
colorbar
```

.mat output files are also available as ASCII .xyz files for users choosing to plot results themselves.

Another package is available to generate a good summary of the result and database in the format of HTML. This package, named GSDF-Report, can be downloaded here:

```
https://github.com/jinwar/gsdf_report
```

After setting up the path of the ASWMS package in the setup_parameters.m, user can run the main_driver.m script to generate the HTML files in the folder htmls.

5.3 Adjust Parameters and Rerun the result

Depends on your result, you may need to adjust the parameters like cross-correlation distance (parameters.maxstadist), smoothing weight (parameters.smweight_array) and others. However, the package is written in a way that it will pick up where was left since last run and continue with it. In order to generate new results, you may need to delete all the files in the winpara (for run_autowinpick.m), CSmeasure (for gsdfmain.m), eikonal (for eikonal_eq.m), helmholtz (for helmholtz_eq.m) folders, depending on from which step you want to redo.

6 The Limitation of ASWMS

6.1 Array Geometry

The major limitation of this package is on the array geometry. In general, it should be applied on a 2D near-even distributed array with average station spacing smaller than the wavelength of surface in the interested highest frequnecy.

It also requests the cross-correlation paths to have ray crossing. The user can adjust the cross-correlation distance to increase ray crossing. However, if the cross-correlation distance is more than 3-4 wavelength, it is likely to generate cycle-skipping problem at high frequencies.
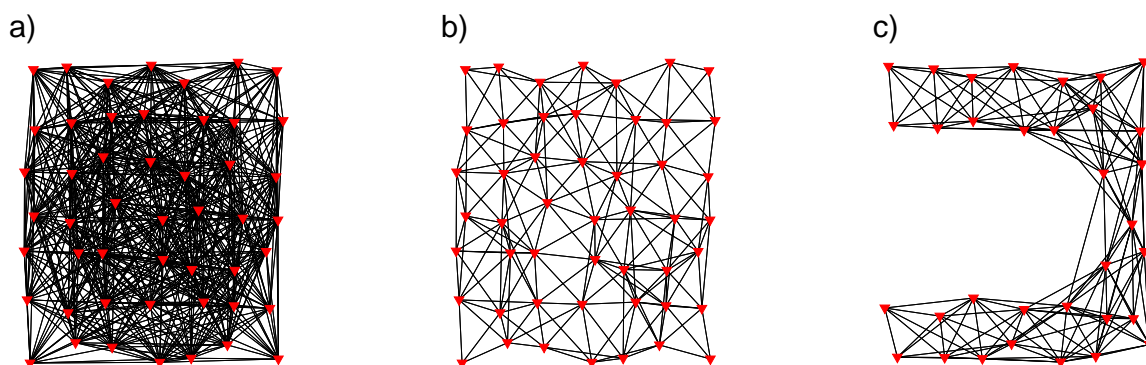
Figure 1 demostrates these different situations.

Figure 1: *Different array geometries and cross-correlation distance a) The ideal array geometry and ray density for ASWMS. b) The cross-correlation measurements are too sparse. parameters.maxstadist should be increased. c) Array geometry is not ideal for ASWMS.*

6.2 Incorrect Instrument Response

Many arraies contain multiple types of sensors, and their instrument response stored in the IRIS DMC may not be correct. This may generate problems in the amplitude correction step and bias the final helmholtz result. In this case, the amplitude correction is not suggested and the Eikonal result eikonal_stack_LHZ.mat is suggested to be final result.

7   Technical Details

In this section we will discuss the technical details in each component of the program, and provide the users more freedom to customize the program to fit their own projects.

7.1   run_autowinpick.m

The script run_autowinpick.m is used to automatically locate the time window to isolate the surface wave energy. Figure 2 shows you an example of this function.
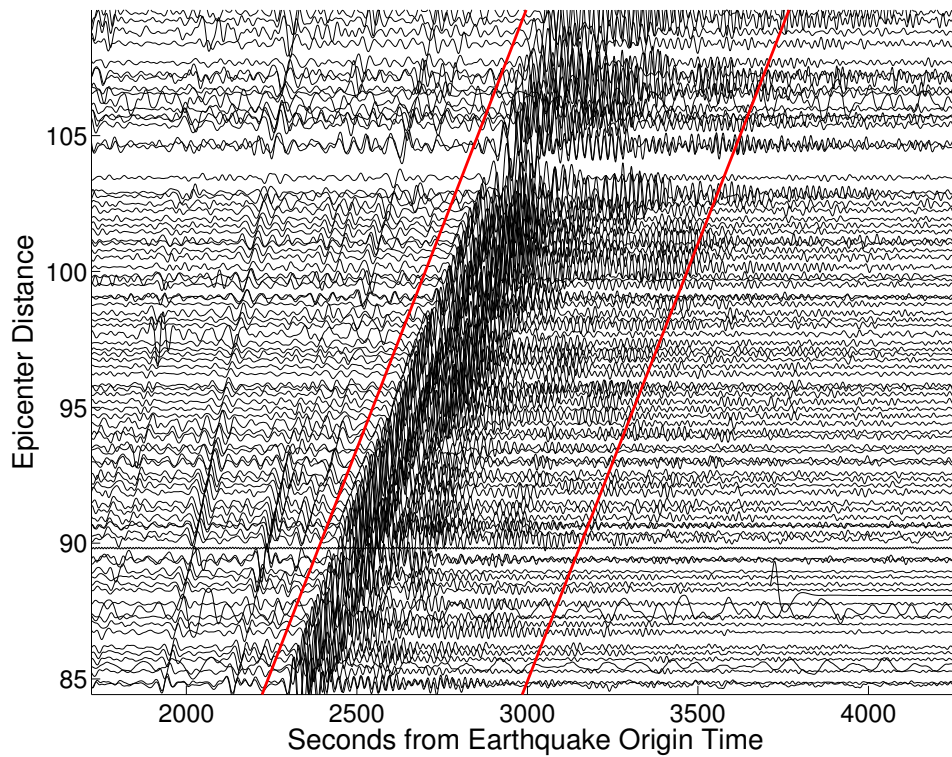

Figure 2: *Window function (red line) to isolate the Rayleigh wave energy*

The notion of this window function selection is based on tracing the frequency dependent group delay of surface wave within a defined group velocity range. The location of the window function is linearly depended on the epicenter distance by:

$$T_1 = \frac{L}{v_1} + t1$$

$$T_2 = \frac{L}{v_2} + t2$$

where T_1 and T_2 are the beginning and ending time of W_S, L is the epicentral distance, and v_1, v_2, t_1, t_2 are the parameters estimated by the linear regression.

The following parameters control the selection of this window function:

```
parameters.min_groupv = 2;
parameters.max_groupv = 5;
parameters.cent_freq = 0.025;
parameters.largest_epidist_range = 3000;
parameters.cycle_before = 2;
parameters.cycle_after = 5;
parameters.min_dist_tol = deg2km(20);
parameters.max_dist_tol = deg2km(160);
```

min_groupv : The minimum group velocity to search for.

max_groupv : The maximum group velocity to search for.

cent_freq : The frequency band that has the best signal to noise ratio. It should in the range of frequencies defined by parameters.periods.

largest_epidist_range : In most regional studies, you don't need to worry about this parameters. For some large arrays (e.g., USArray), the stations span a wide range of epicenter distance so the linear relation between group delay and epicentral distances break down. This parameter defines the largest epicentral distance range that can be processed. If it is exceeded, the program with select the epicentral distance range with the most stations and mark everything outside as bad stations.

cycle_before : The window function should include 1-2 cycles before the group delay (peak of the envelop function).

cycle_after : Number of cycles that the window function should include after the group delay.

min_dist_tol : Minimum distance between the earthquake and the center of the array. Should be large enough to allow the separation between the body wave and surface wave.

max_dist_tol : Maximum distance between the earthquake and the center of the array. Should be small enough to avoid the interference between R1 and R2.

7.2 gsdfmain.m

gsdfmain.m drives the cross-correlation measurement between the nearby stations.

to be added......

8 Reference

Jin, G., and J. B. Gaherty (2014), Surface Wave Measurement Based on Cross-correlation , Geophys. J. Int, submitted.