





Touch-free, Access is easier than ever

Face Access Control Terminal -- BOWE Innovation

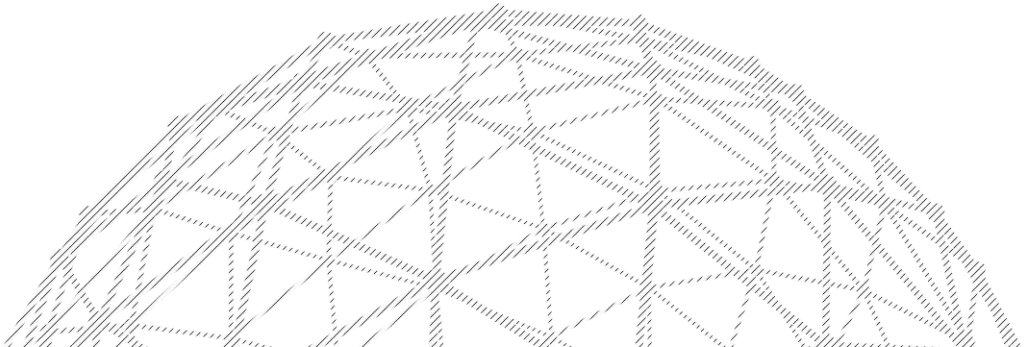

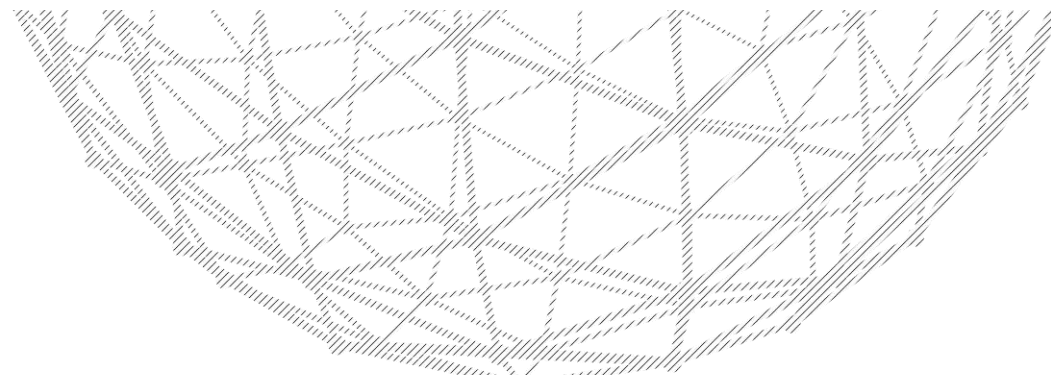

ABOUT US

SINCE 2014

Focus on

Face&Palm recognition terminal

Year Established 2014

Main Product Face& Palm Vein recognition device

Location Shenzhen, China

Web <https://szbowe.en.alibaba.com/>

Officer 90-120 workers (assembly lines)

Company Area 2000m²

Address 411, Building G, Yuxing Technology Industrial Park, Baoan, Shenzhen

- 10 Years OEM&ODM of AI Face Recognition devices.
- Alibaba Top 3 supplier of Face& Palm Vein Recognition Access Control.
- 2 production lines, monthly production capacity can reach out 9,000 units
- Free SDK, R&D support software& hardware customization, and protocol integrate.

Shenzhen BOWE Innovation Co., LTD





OUR FACTORY




— SECURITY —
FACTORY
— EFFICIENT —





OUR TEAM

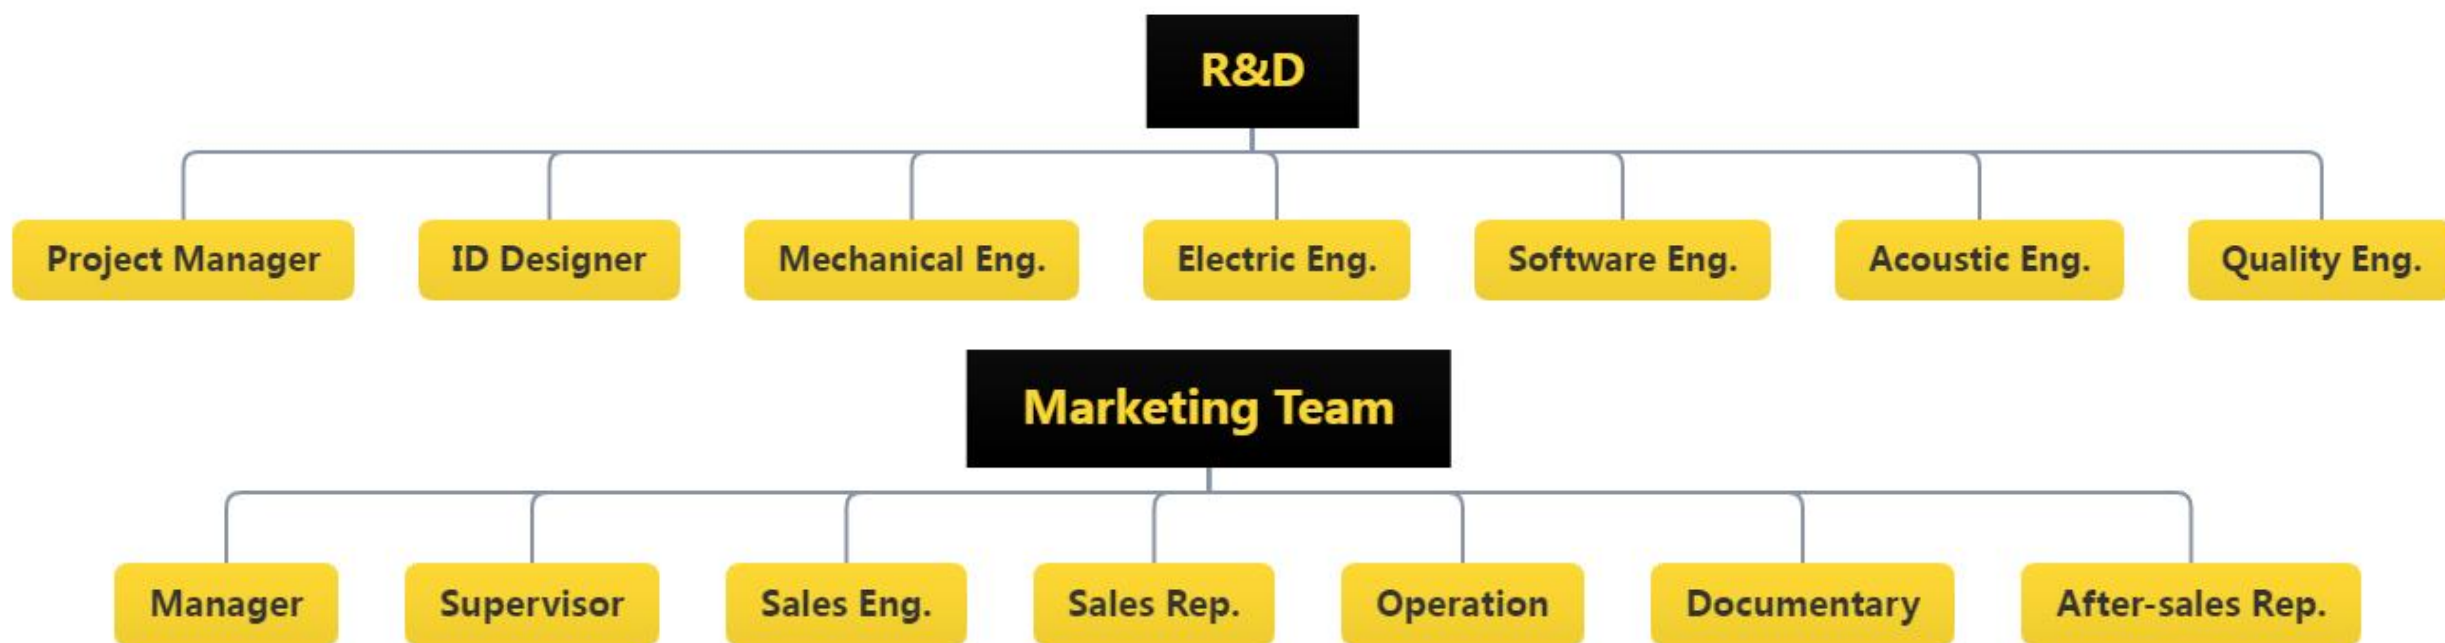

Face Recognition Terminals

Face Recognition Terminals Models:

A2 series:


- Cost down series
- Free SDK
- Support hardware&software customization

A3 series:

- High performance series
- Support BS&CS system
- Free SDK
- Support hardware&software customization

Multi-Languages support: Chinese, English, Korean, Japanese, Spanish, Portugal, Italy, Russian, French, Thai, Turkish, Arabic, Indonesian, Ukrainian, Vietnamese, etc.

Support language customization.

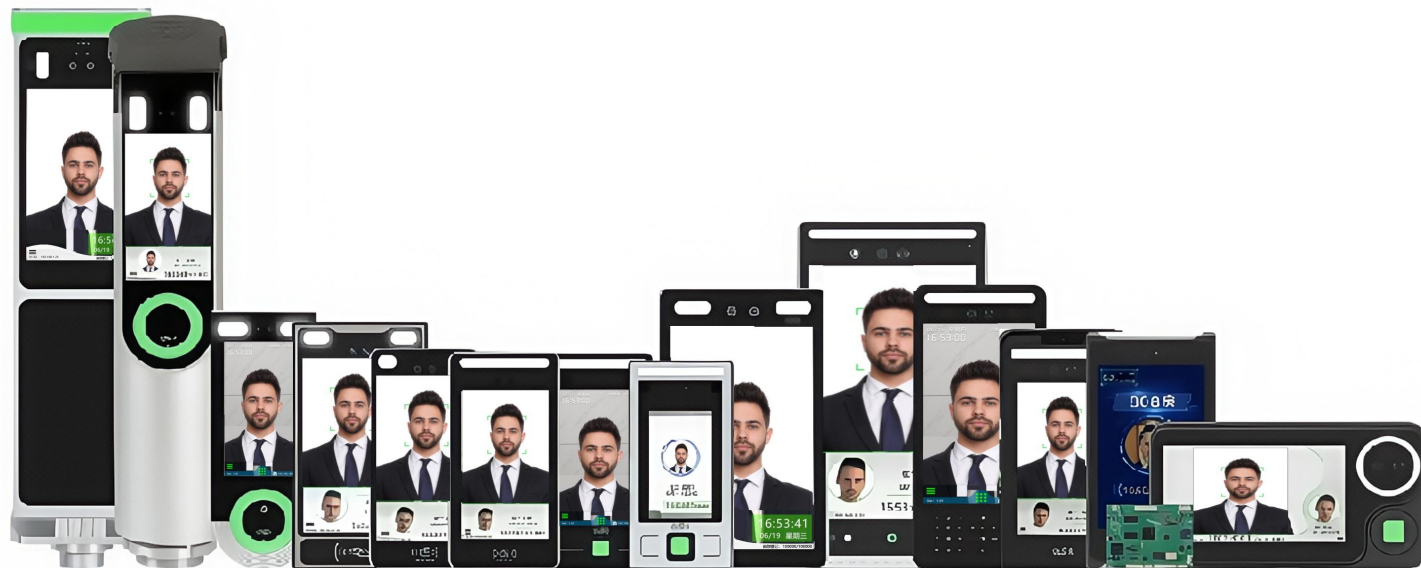

A3-8396

Parameter: Face & Palm & Fingerprint & Card & QR code & Password

Screen: 5 inches IPS full view HD screen

Faces: 3,000

Palm: 3,000

Cards: 3,000

Fingerprint: 100- 3000 available (default 100)

Password: 3,000

Attendance Logs: 200,000

Communication: TCP/IP + USB (WiFi and 4G optional)

Casing: ABS Casing+Acrylic Panel

Camera: wide dynamic SONY binocular cameras


Storage: 128M DDR2, 2GBEMMC

System: LINUX system (Support video intercom function)

Free SDK: HTTP/ MQTT/ WebSocket/ TCP/ DUP/ Web

Wiegand: Exit switch x1, door lock control x1, WG x1, door sensor x1, alarm input x1, alarm output x1

Support Desktop software management & Cloud software management

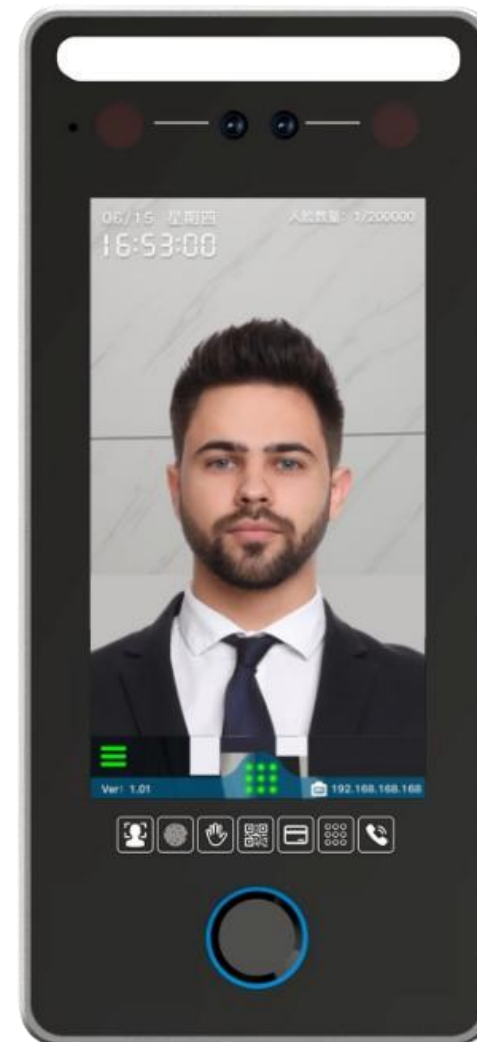

A3-8190/8195

Face & Palm & Card & QR code & Password

Parameter:

Screen: 5 inches IPS full view HD screen

Faces: 20,000

Palm: 10,000

Cards: 20,000

QR code: 20,000

Password: 20,000

Attendance Logs: 1,000,000

Waterproof Level (Optional): IP65, can be install outdoor

Communication: TCP/IP + WiFi+ USB

Casing: Metal Casing+Tempered Glass Panel

Camera: wide dynamic SONY binocular cameras

CPU: 2 cores A7 1.2GHZ


Storage: 256 DDR3 memory; 8GB EMMC storage

System: LINUX system ([Support video intercom function](#))

Free SDK: HTTP/ MQTT/ WebSocket/ TCP/ DUP/ Web

Wiegand: 1 group of Wiegand input; 1 group of Wiegand output (26/34)

Support Desktop software management & Cloud software management

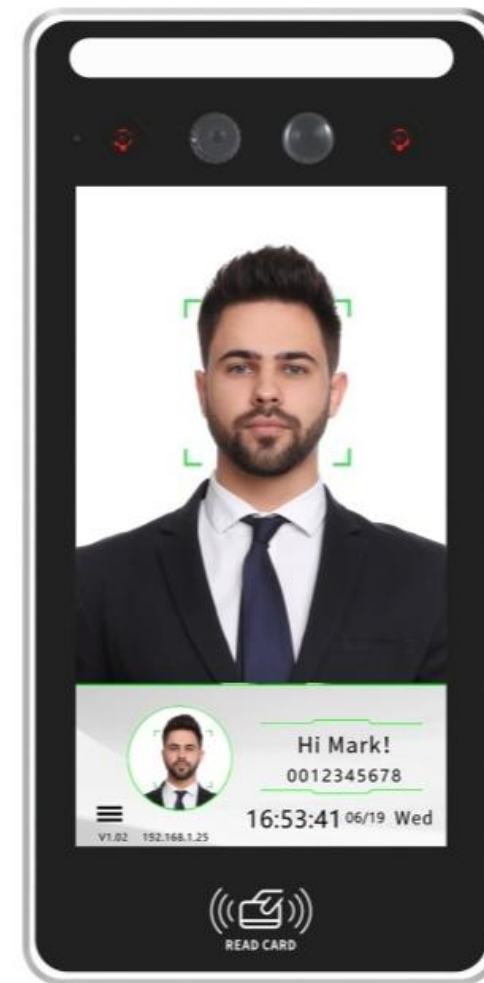

A3-8245

Face & Palm & Fingerprint & Card & QR code & Password

Parameter:

Screen: 4.5 inches IPS full view HD screen

Faces: 5,000

Palm Vein: 5,000

QR code: 5,000

Fingerprint: 5,000

Cards: 5,000

Password: 5,000

Attendance Logs: 200,000

Communication: TCP/IP + USB (WiFi optional)

Casing: ABS Casing+Acrylic Panel

Storage: 256M DDR3+ 8GB EMMC

System: LINUX system

Free SDK: HTTP/ MQTT/ WebSocket/ TCP/ DUP/ Web

Wiegand: 1 group of Wiegand input; 1 group of Wiegand output (26/34)

Support Desktop software management & Cloud software management



A3-8255

Face & Palm & Fingerprint & Card & QR code & Password

Parameter:

Screen: 5.5 inches IPS full view HD screen

Faces: 20,000

Palm Veins: 10,000

QR Codes: 20,000

Fingerprints: 20,000

Cards: 20,000

Attendance Logs: 1,000,000

Communication: TCP/IP + WiFi + USB

Casing: ABS Casing+Tempered Glass Board

Camera: wide dynamic SONY binocular cameras

CPU: 2 cores A7 1.2GHZ


Storage: 1GB memory; 8GB storage

System: LINUX system ([Support video intercom function](#))

Free SDK: HTTP/ MQTT/ WebSocket/ TCP/ DUP/ Web

Wiegand: 1 group of Wiegand input; 1 group of Wiegand output (26/34)

Support Desktop software management & Cloud software management

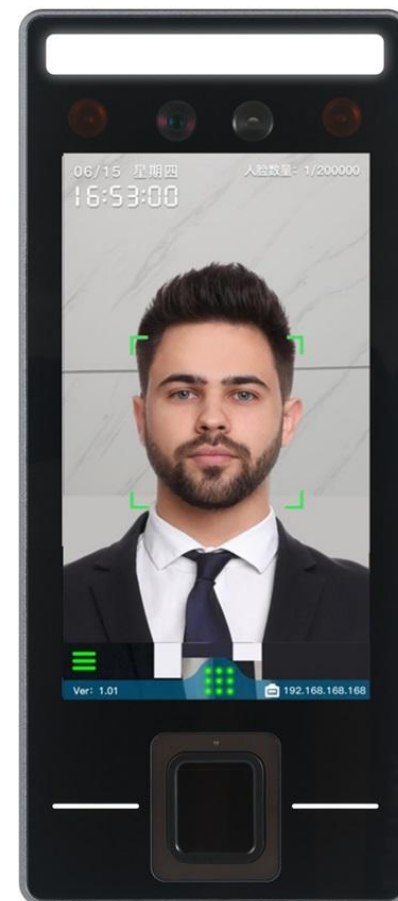

A3-8200

Face & Palm & QR code & Card & Password

Parameter:

Screen: 7 inches IPS full view HD screen

Faces: 20,000

Palm: 10,000

Cards: 20,000

QR code: 20,000

Attendance Logs: 1,000,000

Waterproof Level (Optional): IP65, can be install outdoor

Communication: TCP/IP + WiFi+ USB

Casing: ABS Casing+Tempered Glass Board

Camera: wide dynamic SONY binocular cameras

CPU: 2 cores A7 1.2GHZ


Storage: 1GB memory; 8GB storage

System: LINUX system ([Support video intercom function](#))

Free SDK: HTTP/ MQTT/ WebSocket/ TCP/ DUP/ Web

Wiegand: 1 group of Wiegand input; 1 group of Wiegand output (26/34)

Support Desktop software management & Cloud software management

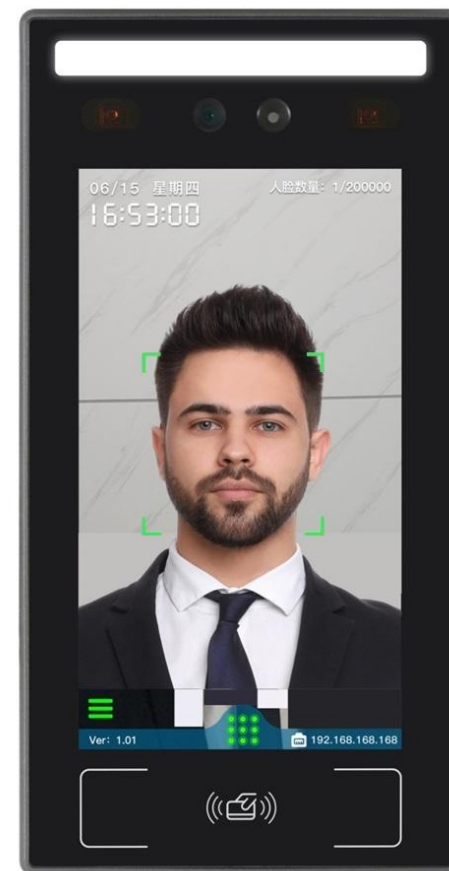

A3-8890

Face & Palm & Fingerprint & Card & QR code & Password

Parameter:

Screen: 8 inches IPS full view HD screen

Faces: 20,000

Palm Veins: 10,000

QR Codes: 20,000

Fingerprints(optional): 20,000

Cards: 20,000

Attendance Logs: 1,000,000

Communication: TCP/IP + WiFi + USB

Casing: ABS Casing+Tempered Glass Board

Waterproof Level: IP65, can be install outdoor

Camera: wide dynamic SONY binocular cameras

CPU: 2 cores A7 1.2GHZ


Storage: 1GB memory; 8GB storage

System: LINUX system ([Support video intercom function](#))

Free SDK: HTTP/ MQTT/ WebSocket/ TCP/ DUP/ Web

Wiegand: 1 group of Wiegand input; 1 group of Wiegand output (26/34)

Support Desktop software management & Cloud software management

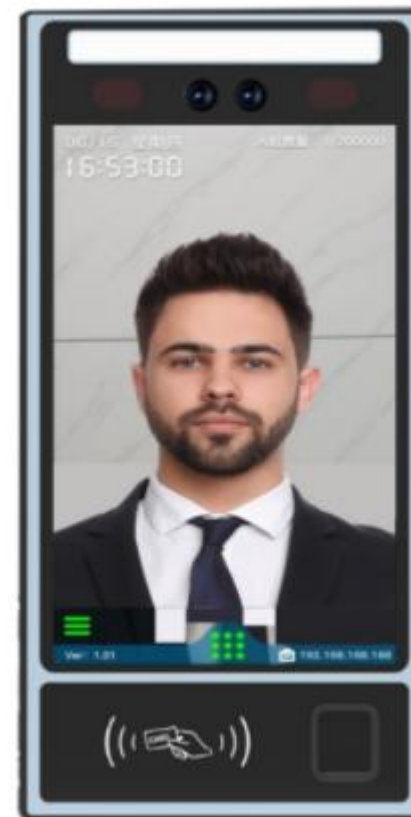

A3-8100

Face & Card & Password

Parameter:

Screen: 5 inches IPS full view HD screen

Faces: 20,000

Cards: 20,000

Attendance Logs: 1,000,000

Communication: TCP/IP (WIFI optional)

Casing: Metal Casing+Tempered Glass Panel

Camera: wide dynamic SONY binocular cameras

Waterproof Level: IP65, can be install outdoor

CPU: 2 cores A7 1.2GHZ

Storage: 1GB memory; 8GB storage

System: LINUX system

Free SDK: HTTP/ MQTT/ WebSocket/ TCP/ DUP/ Web

Wiegand: 1 group of Wiegand input; 1 group of Wiegand output (26/34)

Support Desktop software management & Cloud software management

Special: Masks Detection



A3-8700

Parameter:

Face & Palm & QR code & Card & Password

Screen: 7 inches IPS full view HD screen

Faces: 5,000

Cards: 5,000

Palm Vein: 5,000

QR code: 5,000

Password: 5,000

Attendance Logs: 200,000

Communication: TCP/IP + USB

Casing: ABS Casing+Tempered Glass Board


Waterproof Level (Optional): IP65, can be install outdoor

Storage: Storage: 256M DDR3+ 8GB EMMC

System: LINUX system

Free SDK: HTTP

Wiegand: 1 group of Wiegand input; 1 group of Wiegand output (26/34)

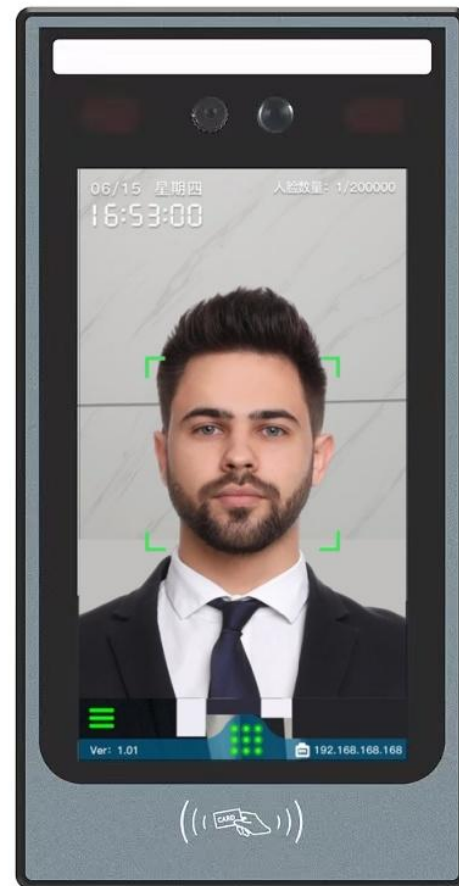

A3-8490

Face & Card & Password

Parameter:

Screen: 7 inches IPS full view HD screen

Faces: 20,000

Cards: 20,000

Attendance Logs: 1,000,000

Communication: TCP/IP + WiFi+ 4G+ USB

Casing: ABS Casing+Tempered Glass Board

Camera: wide dynamic SONY binocular cameras

CPU: 2 cores A7 1.2GHZ

Storage: 1GB memory; 8GB storage

System: LINUX system

Free SDK: HTTP/ MQTT/ WebSocket/ TCP/ DUP/ Web

Wiegand: 1 group of Wiegand input; 1 group of Wiegand output (26/34)

Support Desktop software management & Cloud software management



A3-8280

Face & Palm & Fingerprint & Card & QR code & Password

Parameter:

Screen: 8 inches IPS full view HD screen

Faces: 50,000

Cards: 50,000

Password: 50,000

Attendance Logs: 1,000,000

Communication: TCP/IP + USB (WIFI optional)

Casing: ABS Casing+Tempered Glass Board

Waterproof Level: IP65, can be install outdoor

Camera: wide dynamic SONY binocular cameras

CPU: 2 cores A7 1.2GHZ


Storage: 1GB memory; 16GB storage

System: LINUX system

Free SDK: HTTP/ MQTT/ WebSocket/ TCP/ DUP/ Web

Wiegand: 1 group of Wiegand input; 1 group of Wiegand output (26/34)

Support Desktop software management & Cloud software management

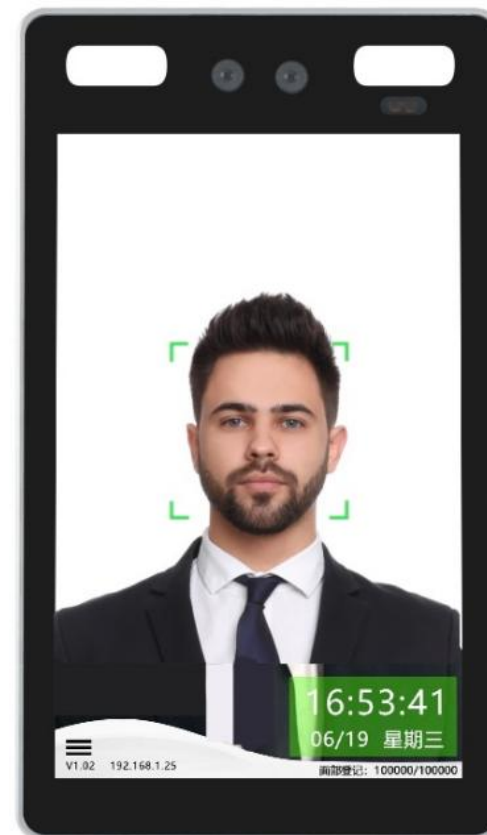

A3-DJ (Video Intercom indoor unit)

Parameter:

Working Voltage: DC12V/2A

Body material: ABS plastic body + tempered glass panel

Display: (A3-DJ01) 7-inch IPS full-view HD touch screen
(A3-DJ02) 4.3-inch IPS full-view HD screen

Communication method: TCP/IP +WIFI

Power supply: 12V input or POE power supply

Management method: Touch/ Button

Storage: 128M DDR3+1GB EMMO

Alarm input: 8 groups (anti-theft, door magnet, window, flooding, fire, gas, smoke, other)

Alarm output: 1 group (can drive 100mA alarm light or horn)

Storage: DDR3 128M Byte, SPI NAND 128M Byte

System: LINUX System

Elevator call: support

Operating system: LINUX

Installation and fixation: support wall installation (compatible with 86 electrical chassis)



A2-6145

Face & Card & Password

Parameter:

Screen: 4.5 Inches IPS Full View HD Screen

Faces: 1,000

Cards: 1,000

Password: 1,000

Attendance Logs: 100,000

Communication: USB

Casing: ABS Casing+Acrylic Panel

CPU: Single Core A7 32-bit RISC CPU 1.0 GHz

Storage: DDR3 128M Byte, SPI NAND 128M Byte

System: LINUX System

Camera: Wide Dynamic Binocular 2 Megapixel HD Camera

Wiegand: 1 group of Wiegand input; 1 group of Wiegand output
(26/34)



A2-6250

Face & Fingerprint & Card & Password

Parameter:

Screen: 5 Inches IPS Full View HD Screen

Faces: 1,000

Fingerprint: 300 (800 can be customize)

Cards: 1,000

Password: 1,000

Attendance Logs: 100,000

Communication: USB

Casing: ABS Casing+Acrylic Panel

CPU: Single Core A7 32-bit RISC CPU 1.0 GHz

Storage: DDR3 128M Byte, SPI NAND 128M Byte

System: LINUX System

Camera: Wide Dynamic Binocular 2 Megapixel HD Camera

Wiegand: 1 group of Wiegand input; 1 group of Wiegand output
(26/34)

Waterproof Level (Optional): IP65, can be install outdoor



Face & Card & QR code & Password

Parameter:

Screen: 5 Inches IPS Full View HD Screen

Faces: 5,000

Cards: 5,000

Password: 5,000

Attendance Logs: 200,000

Communication: TCP/IP + WiFi + USB (4G can be customize)

Casing: ABS Casing+Acrylic Panel

CPU: Single Core A7 32-bit RISC CPU 1.0 GHz

Storage: DDR3 128M Byte, SPI NAND 128M Byte

System: LINUX System

Camera: Wide Dynamic Binocular 2 Megapixel HD Camera

Free SDK: MQTT

Wiegand: 1 group of Wiegand input; 1 group of Wiegand output
(26/34)

Waterproof Level (Optional): IP65, can be install outdoor



A2-5F

Face & Fingerprint & Card & Password

Parameter:

Screen: 5 Inches IPS Full View HD Screen

Faces: 5,000

Cards: 5,000

Fingerprint: 300 (800 can be customize)

Password: 5,000

Attendance Logs: 200,000

Communication: TCP/IP + WiFi + USB (4G can be customize)

Casing: ABS Casing+Acrylic Panel

CPU: Single Core A7 32-bit RISC CPU 1.0 GHz

Storage: DDR3 128M Byte, SPI NAND 128M Byte

System: LINUX System

Camera: Wide Dynamic Binocular 2 Megapixel HD Camera

Free SDK: MQTT

Wiegand: 1 group of Wiegand input; 1 group of Wiegand output
(26/34)

Waterproof Level (Optional): IP65, can be install outdoor



Face & Fingerprint & Card & Password

Parameter:

Screen: 8 Inches IPS Full View HD Screen

Faces: 5,000

Cards: 5,000

Fingerprint: 300 (800 can be customize)

Password: 5,000

Attendance Logs: 200,000

Communication: TCP/IP + WiFi + USB (4G can be customize)

Casing: ABS Casing+Acrylic Panel

CPU: Single Core A7 32-bit RISC CPU 1.0 GHz

Storage: DDR3 128M Byte, SPI NAND 128M Byte

System: LINUX System

Camera: Wide Dynamic Binocular 2 Megapixel HD Camera

Free SDK: MQTT

Wiegand: 1 group of Wiegand input; 1 group of Wiegand output
(26/34)

Waterproof Level (Optional): IP65, can be install outdoor





NEW

A4-608 (Palm Vein Scanner)

Parameter:

Working Voltage: DC12V/2A

Attendance Logs: 100,000

Palm: 2,000

Cards: 2,000

Communication: TCP/IP +WiFi + USB

Casing: ABS Casing+Acrylic Panel

Screen: 320 × 240 Color LCD

CPU: Dual Core A7 32-bit RISC CPU 1.0 GHz

Storage: DDR3 128M Byte, SPI NAND 128M Byte

System: LINUX System

Camera: Wide Dynamic Binocular 2 Megapixel HD Camera

Free SDK: MQTT

Wiegand: 1 group of Wiegand input; 1 group of Wiegand output
(26/34)



A5-M3 Human&Palm detection Automatic Door Operators

Parameter:

CPU: Dual-core A7 32-bit RISC CPU 1.0 GHz

Camera: 2 megapixel HD camera

Senser: CMOS

Recognition Area: 115*95*55

Angle Range: 35 degree adjustable

Night Vision: Supported

Special: Palm detection automatically open door

Human detection automatically open door

Update: Support remote update

Communication: QR code


Working Voltage: DC12V/2A

Current: 150mA+30mA

Work temperature: -20 ° -60 °

Open door mode: Normal open (normal close available)

System: LINUX system

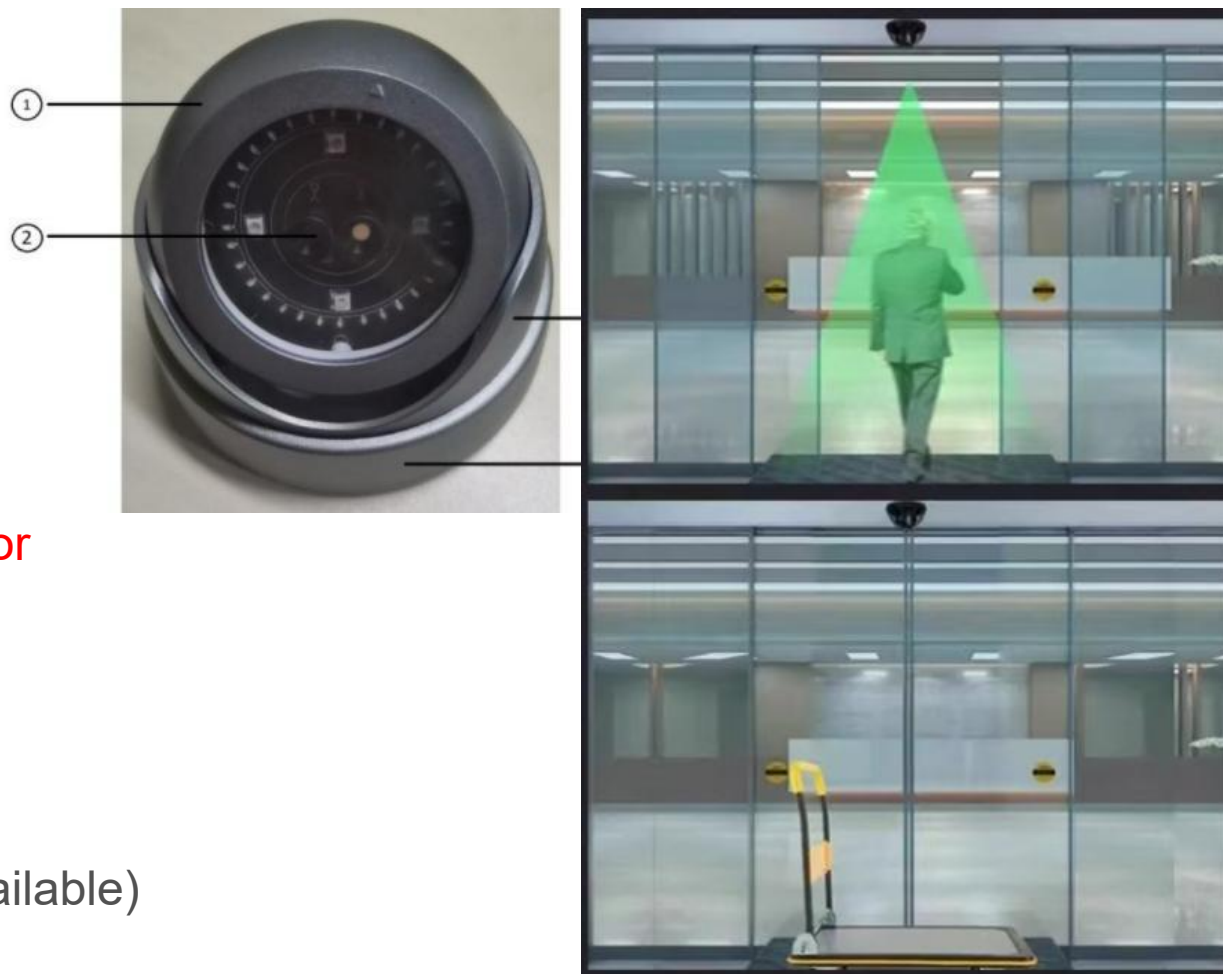

BOWE Management System

Three Types of Management

Keypad Management、CS System Management BS
Cloud/Mobile Management

More Convenient And Practical





Keypad Management



CS System Management



BS Cloud/Mobile
Management

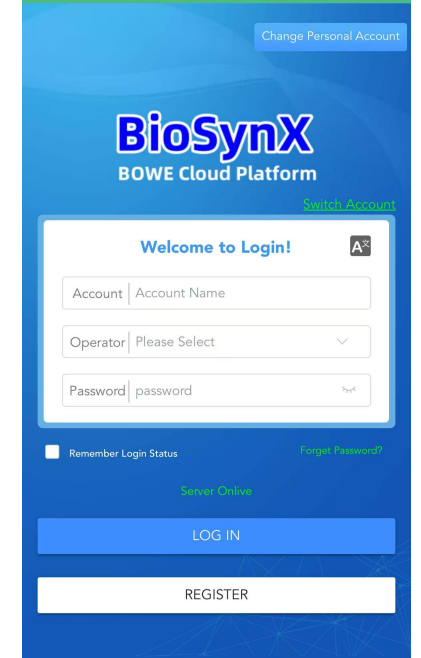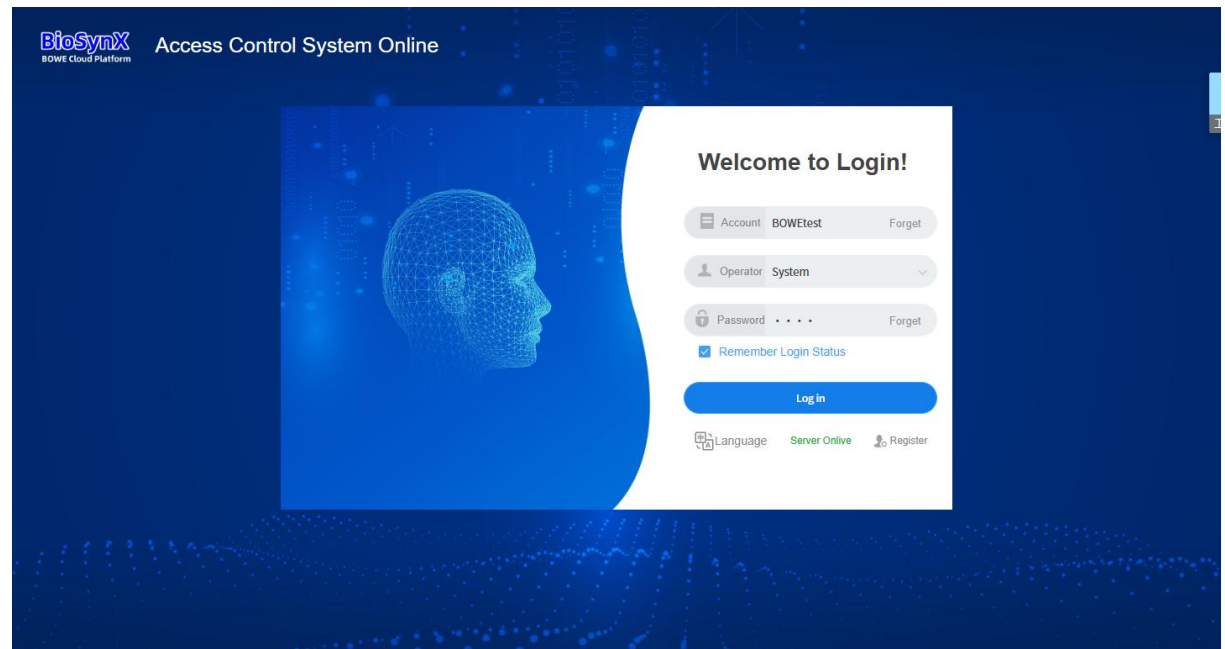

Application

Intelligent Community Passage System, Office Building Hall Corridor Management System, Site Labor System, Club Membership Management System, Scenic Spot Ticket System, etc.



Construction Site



Office Building



Community



Scenic Area



Pedestrian Passage




Club



Government



School

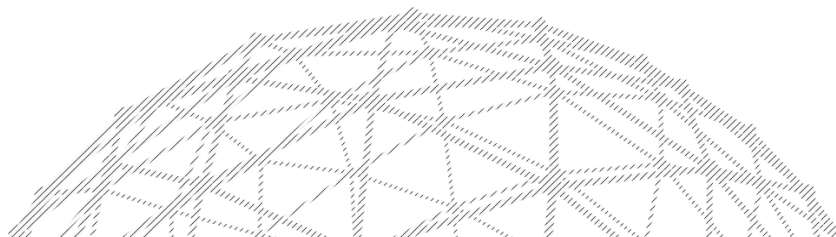

Shenzhen BOWE Innovation Co., LTD

Focus on Face&Palm Recognition Terminal

Ruby Ren

Sales Manager

TEL/ WhatsApp/ WeChat: +86 15914161037

<https://szbowe.en.alibaba.com>