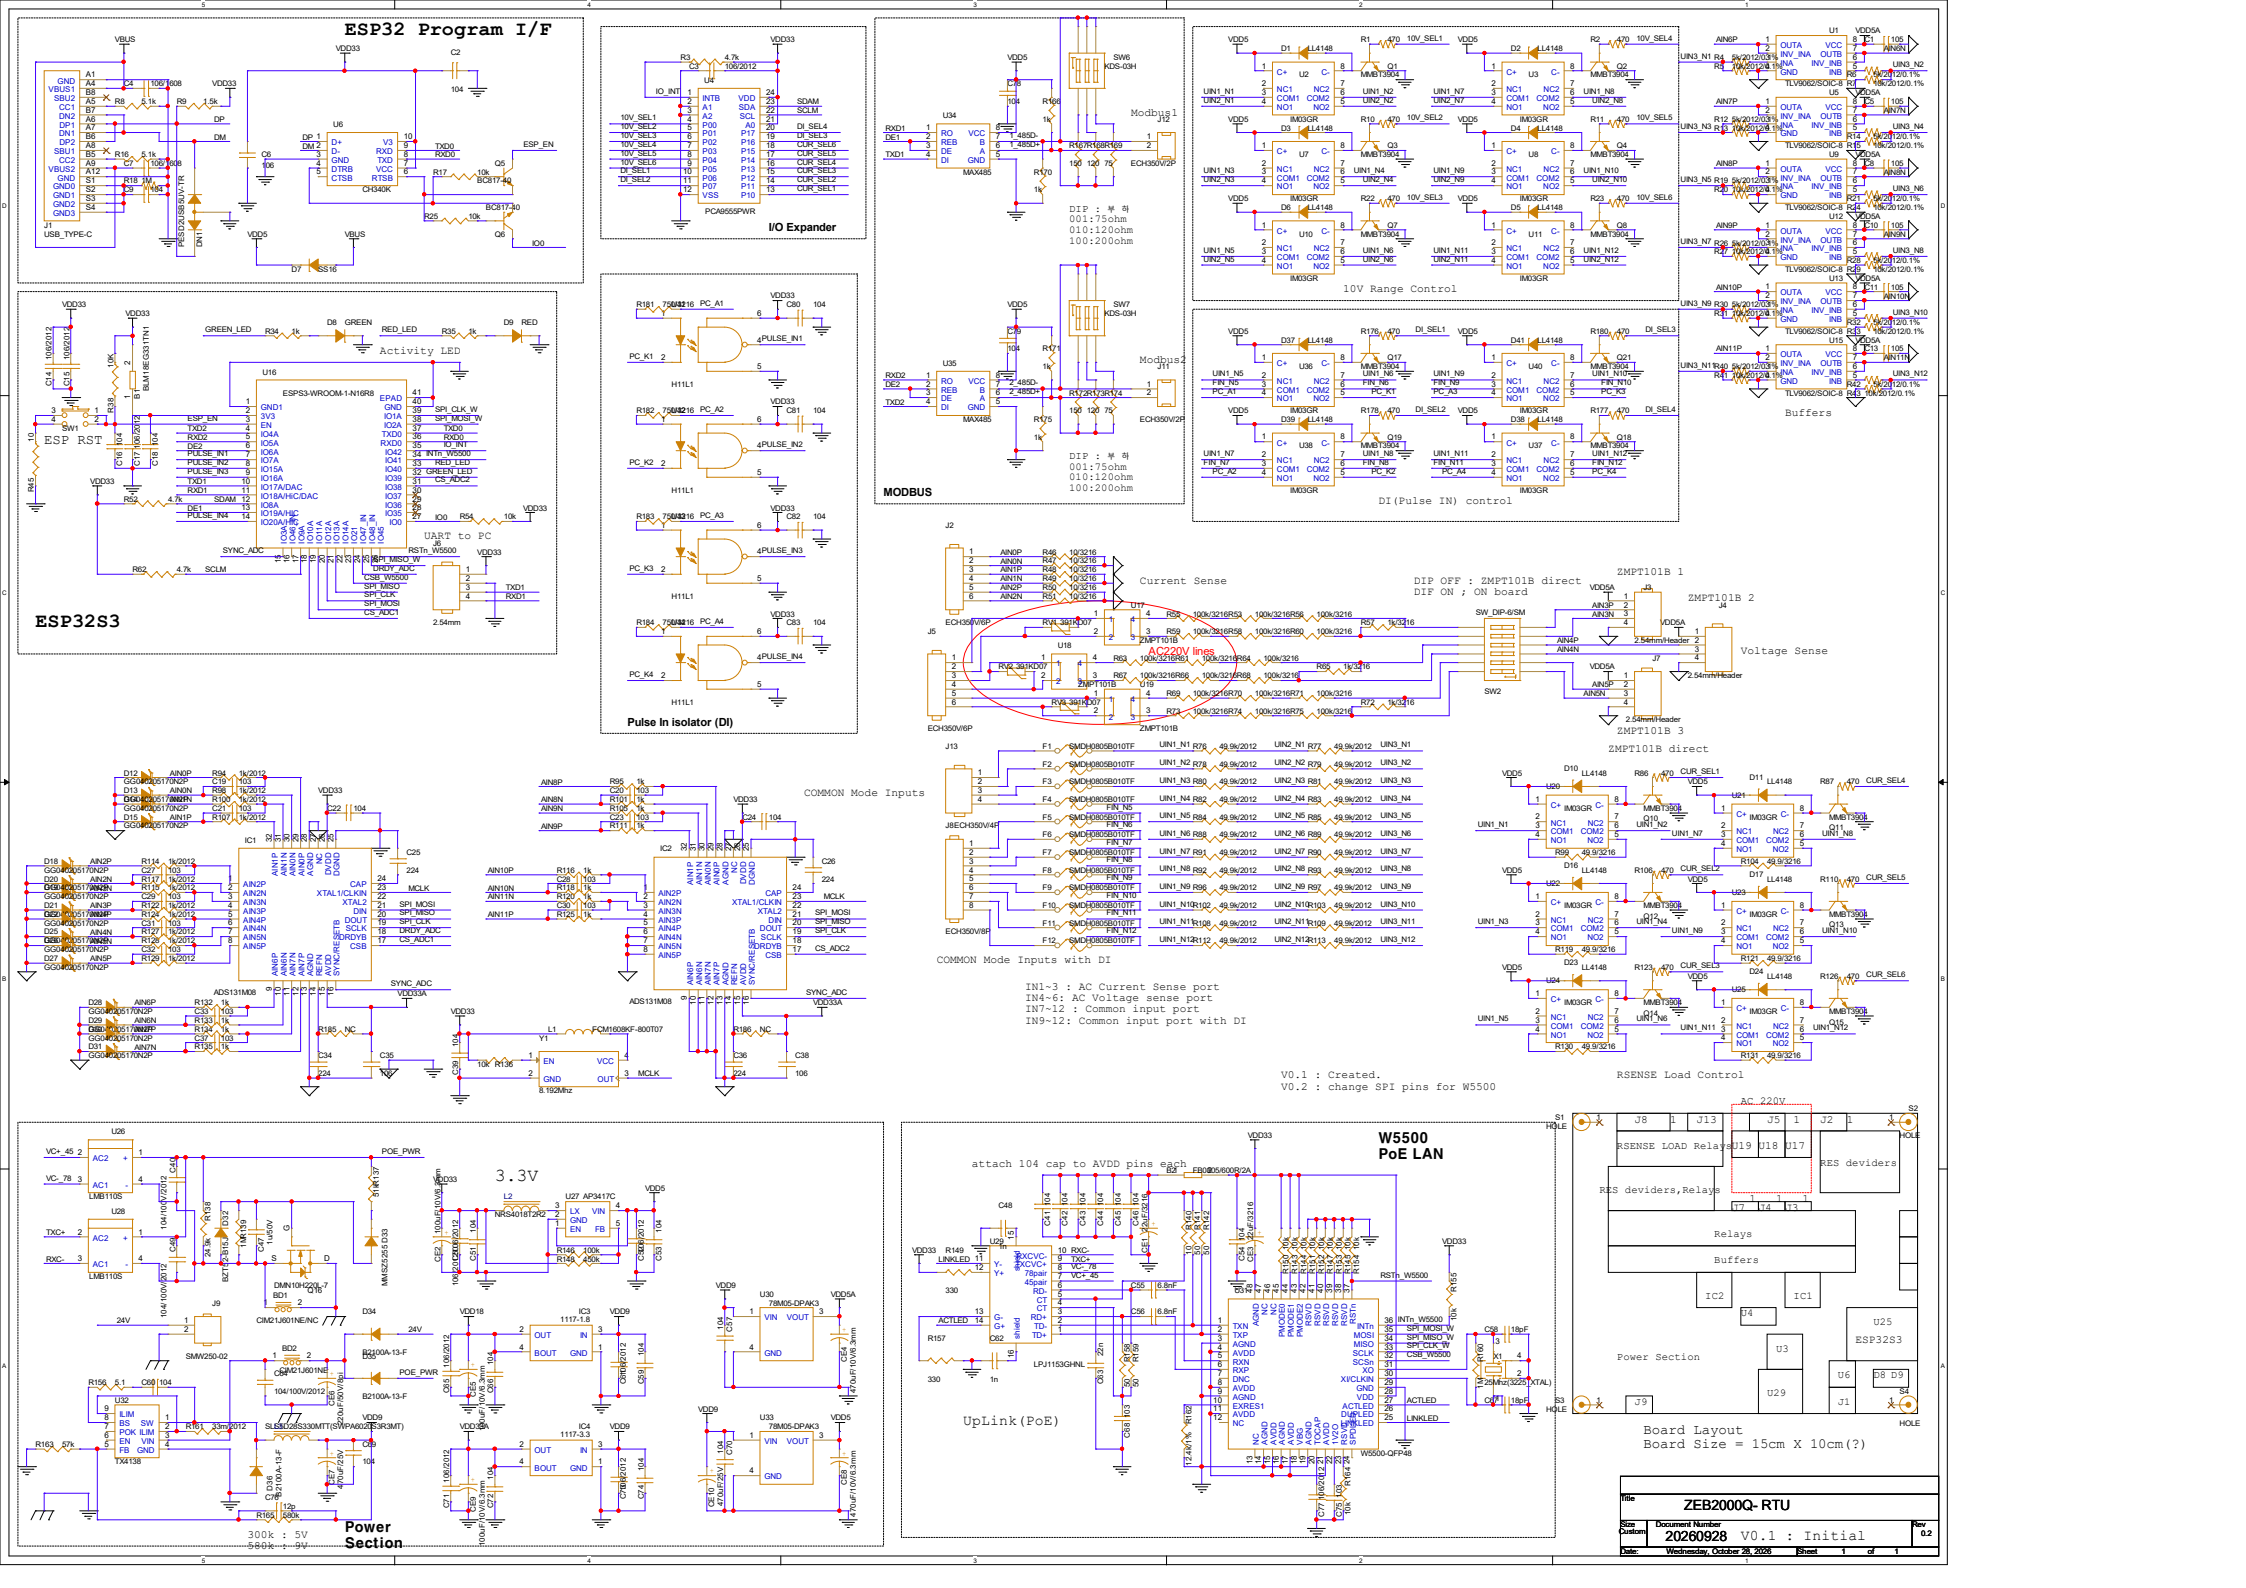

ESP32 Program I/F
ESP32S3
I/O Expander
Modbus1
Modbus2
MODBUS
10V Range Control
DI(Pulse IN) control
Buffers
Activity LED
ESP RST
UART to PC
Pulse In isolator (DI)
Current Sense
AC220V lines
ZMPT101B 1
ZMPT101B 2
ZMPT101B 3
ZMPT101B direct
Voltage Sense
COMMON Mode Inputs
COMMON Mode Inputs with DI
IN1~3 : AC Current Sense port
IN4~6: AC Voltage sense port
IN7~12 : Common input port
IN9~12: Common input port with DI
RSENSE Load Control
V0.1 : Created.
V0.2 : change SPI pins for W5500
W5500
PoE LAN
attach 104 cap to AVDD pins each
UpLink(PoE)
3.3V
Power Section
300k : 5V
580k : 9V
AC 220V
RSENSE LOAD Relays
RES deviders
RES deviders,Relays
Relays
Buffers
Power Section
Board Layout
Board Size = 15cm X 10cm(?)
ZEB2000Q- RTU
20260928 V0.1 : Initial
Wednesday, October 28, 2026