


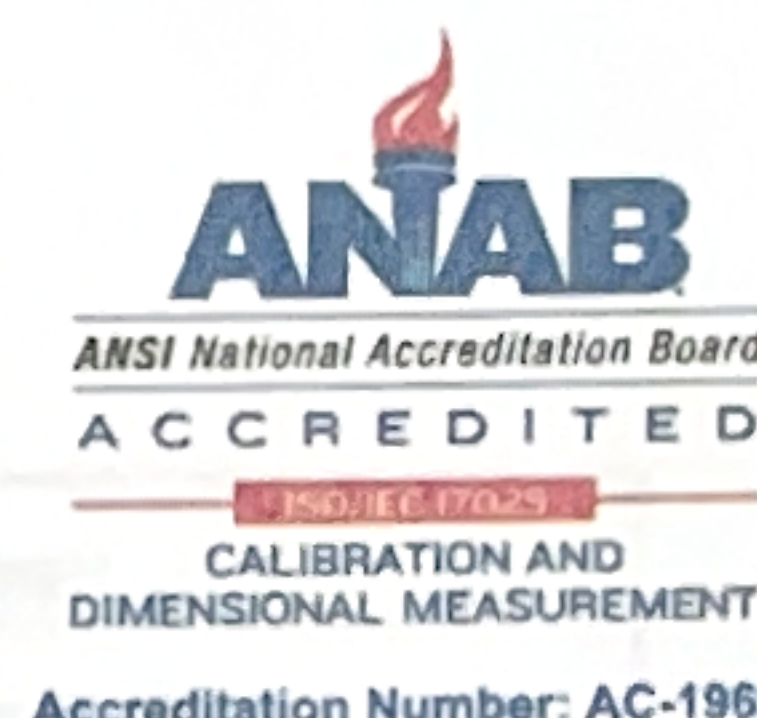

Certificate of Calibration

Certificate Number: 5523631031410674

Customer:

ZHONGLI TALESUN HONG KONG LIMITED
CARRETERA GUADALAJARA MORELIA #19200 INT. 3
COL. BUENAVISTA
TLAJOMULCO DE ZUÑIGA JALISCO 45640

Date : Nov 28, 2024
Work Order : GDL-455940

MP Control #:	DP7251	Serial Number:	1908911
Asset ID:	DP7251	Department:	N/A
Description:	DIGITAL SCALE	Location:	ON SITE CALIBRATION
Manufacturer:	INTERTEK	Received Condition:	IN TOLERANCE
Model Number:	IT3	Returned Condition:	IN TOLERANCE
Size:	0 to 30 kg	Cal. Date:	Nov 22, 2024
Resolution:	0.001kg	Cal. Interval:	12 MONTHS
Temp./RH:	24.7°C / 41 % RH	Cal. Due Date:	Nov 22, 2025

STATEMENTS OF PASS OR FAIL CONFORMANCE: The uncertainty of measurement has been taken into account when determining compliance with specification. All measurements and test results guard banded to ensure the probability of false-accept does not exceed 2% in compliance with ANSI/NCSL Z540.3-2006.

THE CALIBRATION REPORT STATUS:

PASS - Term used when compliance statement is given, and the measurement result is PASS.

PASS² - Term used when compliance statement is given, and the measurement result is conditional passed or PASS².

FAIL - Term used when compliance statement is given, and the measurement result is FAIL.

FAIL² - Term used when compliance statement is given, and the measurement result is conditional failed or FAIL².

REPORT OF VALUE - Term used when reported measurement is not requiring compliance statement in report.

ADJUSTED - When adjustments are made to an instrument which changes the value of measurement from what was measured as found to new value as left.

LIMITED - When an instrument fails calibration but is still functional in a limited manner.

The expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%, unless otherwise stated. This calibration report complies with ISO/IEC 17025:2017 and ANSI/NCSL Z540.3. Calibration cycles and resulting due dates were submitted/approved by the customer. Any number of factors may cause an instrument to drift out of tolerance before the next scheduled calibration. Recalibration cycles should be based on frequency of use, environmental conditions and customer's established systematic accuracy. All standards are traceable to SI through the National Institute of Standards and Technology (NIST) and/or recognized national or international standards laboratories. Services rendered include proper manufacturer's service instruction and are warranted for no less than thirty (30) days. The information on this report pertains only to the instrument identified, this may not be reproduced in part or in a whole without the prior written approval of the issuing MP Calibration Laboratory.

Standards Used to Calibrate Equipment

I.D.	Manufacturer	Description	Model	Traceability Number	Cal. Due Date
DJ8043	EXTECH INSTRUMENTS	TEMPERATURE & HUMIDITY DATALOGG	42280	5523631031211092	Jun 1, 2025
BP4850	METTLER TOLEDO	WEIGHT	CLASS OIML M2	5523631030591830	Aug 5, 2025
EH1274	METTLER TOLEDO	WEIGHT	CLASS OIML M2	5523631030591896	Jan 2, 2025
CJ9852	N/A	WEIGHT SET	CLASS OIML M2	551220085446286	Oct 22, 2025

Procedures Used in this Event

Procedure Name

MPC-WEI-001

Description

Weighing Instruments, General, Rev.08, Jul-15-2024

Additional notes: See attached data.

Calibrating Technician:

CAROLINA RICO

Approved By:

FELIPE DELGADO