autoridad

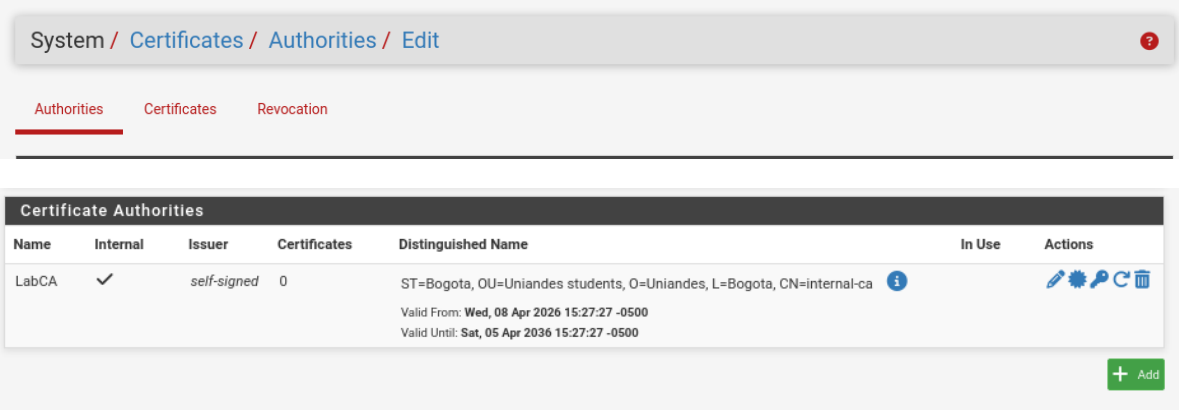

certificado

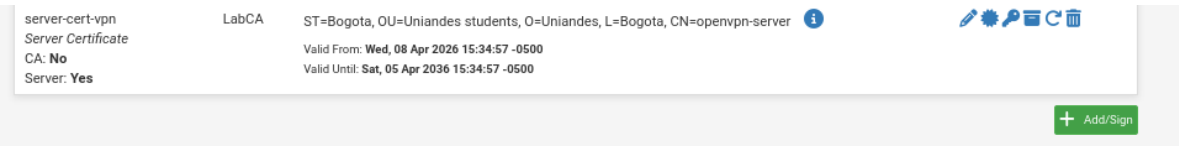

User

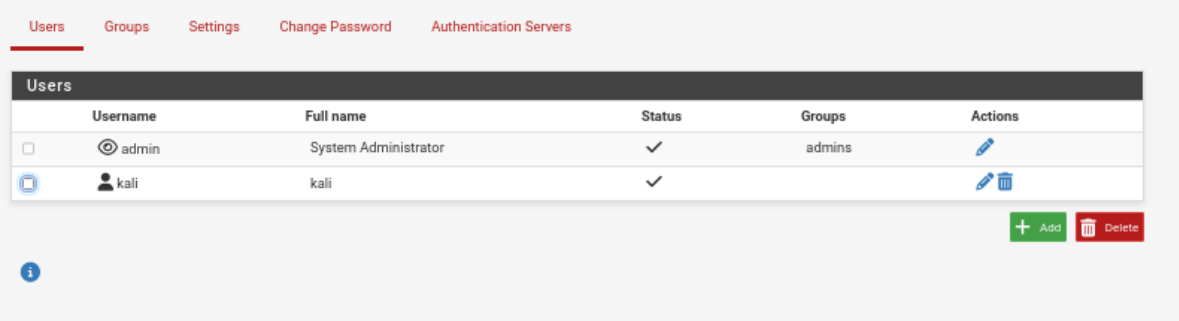

Config openVPN

General Information

Description VPN-HIDDEN

A description of this VPN for administrative reference.

Disabled ☐ Disable this server

Set this option to disable this server without removing it from the list.

Mode Configuration

Server mode Remote Access (SSL/TLS)

Device mode tun - Layer 3 Tunnel Mode

"tun" mode carries IPv4 and IPv6 (OSI layer 3) and is the most common and compatible mode across all platforms.
"tap" mode is capable of carrying 802.3 (OSI Layer 2.)

Endpoint Configuration

Protocol UDP on IPv4 only

Interface WAN

The interface or Virtual IP address where OpenVPN will receive client connections.

Local port 1194

The port used by OpenVPN to receive client connections.

Cryptographic Settings

TLS Configuration ☑ Use a TLS Key

A TLS key enhances security of an OpenVPN connection by requiring both parties to have a common key before a peer can perform a TLS handshake. This layer of HMAC authentication allows control channel packets without the proper key to be dropped, protecting the peers from attack or unauthorized connections.The TLS Key does not have any effect on tunnel data.

☑ Automatically generate a TLS Key.

Peer Certificate Authority LabCA

Peer Certificate Revocation list No Certificate Revocation Lists defined. One may be created here: System > Cert. Manager

OCSP Check ☐ Check client certificates with OCSP

Server certificate server-cert-vpn (Server: Yes, CA: LabCA)

Certificates known to be incompatible with use for OpenVPN are not included in this list, such as certificates using incompatible ECDSA curves or weak digest algorithms.

DH Parameter Length 2048 bit

Diffie-Hellman (DH) parameter set used for key exchange.

ECDH Curve Use Default

The Elliptic Curve to use for key exchange.
The curve from the server certificate is used by default when the server uses an ECDSA certificate. Otherwise, secp384r1 is used as a fallback.

Data Encryption Algorithms

Available Data Encryption Algorithms
Click to add or remove an algorithm from the list

- CHACHA20-POLY1305 (256 bit key, stream cipher)
- DES-EDE-CBC (128 bit key, 64 bit block)
- DES-EDE-CFB (128 bit key, 64 bit block)
- DES-EDE-OFB (128 bit key, 64 bit block)
- DES-EDE3-CBC (192 bit key, 64 bit block)
- DES-EDE3-CFB (192 bit key, 64 bit block)
- DES-EDE3-CFB1 (192 bit key, 64 bit block)
- DES-EDE3-CFB8 (192 bit key, 64 bit block)
- DES-EDE3-OFB (192 bit key, 64 bit block)
- None (No Encryption)

Allowed Data Encryption Algorithms. Click an algorithm name to remove it from the list

- AES-256-GCM
- AES-128-GCM
- CHACHA20-POLY1305

The order of the selected Data Encryption Algorithms is respected by OpenVPN. This list is ignored in Shared Key mode.

Fallback Data Encryption AES-256-CBC (256 bit key, 128 bit block)

Tunnel Settings

IPv4 Tunnel Network	10.10.0.0/24 This is the IPv4 virtual network or network type alias with a single entry used for private communications between this server and client hosts expressed using CIDR notation (e.g. 10.0.8.0/24). The first usable address in the network will be assigned to the server virtual interface. The remaining usable addresses will be assigned to connecting clients. A tunnel network of /30 or smaller puts OpenVPN into a special peer-to-peer mode which cannot push settings to clients. This mode is not compatible with several options, including Exit Notify, and Inactive.
IPv6 Tunnel Network	This is the IPv6 virtual network or network type alias with a single entry used for private communications between this server and client hosts expressed using CIDR notation (e.g. fe80::/64). The ::1 address in the network will be assigned to the server virtual interface. The remaining addresses will be assigned to connecting clients.
Redirect IPv4 Gateway	☐ Force all client-generated IPv4 traffic through the tunnel.
Redirect IPv6 Gateway	☐ Force all client-generated IPv6 traffic through the tunnel.
IPv4 Local network(s)	192.202.40.0/24 IPv4 networks that will be accessible from the remote endpoint. Expressed as a comma-separated list of one or more CIDR ranges or host/network type aliases. This may be left blank if not adding a route to the local network through this tunnel on the remote machine. This is generally set to the LAN network.

VPN / OpenVPN / Servers

Servers | Clients | Client Specific Overrides | Wizards

OpenVPN Servers

Interface	Protocol / Port	Tunnel Network	Mode / Crypto	Description	Actions
WAN	UDP4 / 1194 (TUN)	10.10.0.0/24	**Mode:** Remote Access (SSL/TLS) **Data Ciphers:** AES-256-GCM, AES-128-GCM, CHACHA20-POLY1305, AES-256-CBC **Digest:** SHA256 **D-H Params:** 2048 bits	VPN-HIDDEN	

+ Add

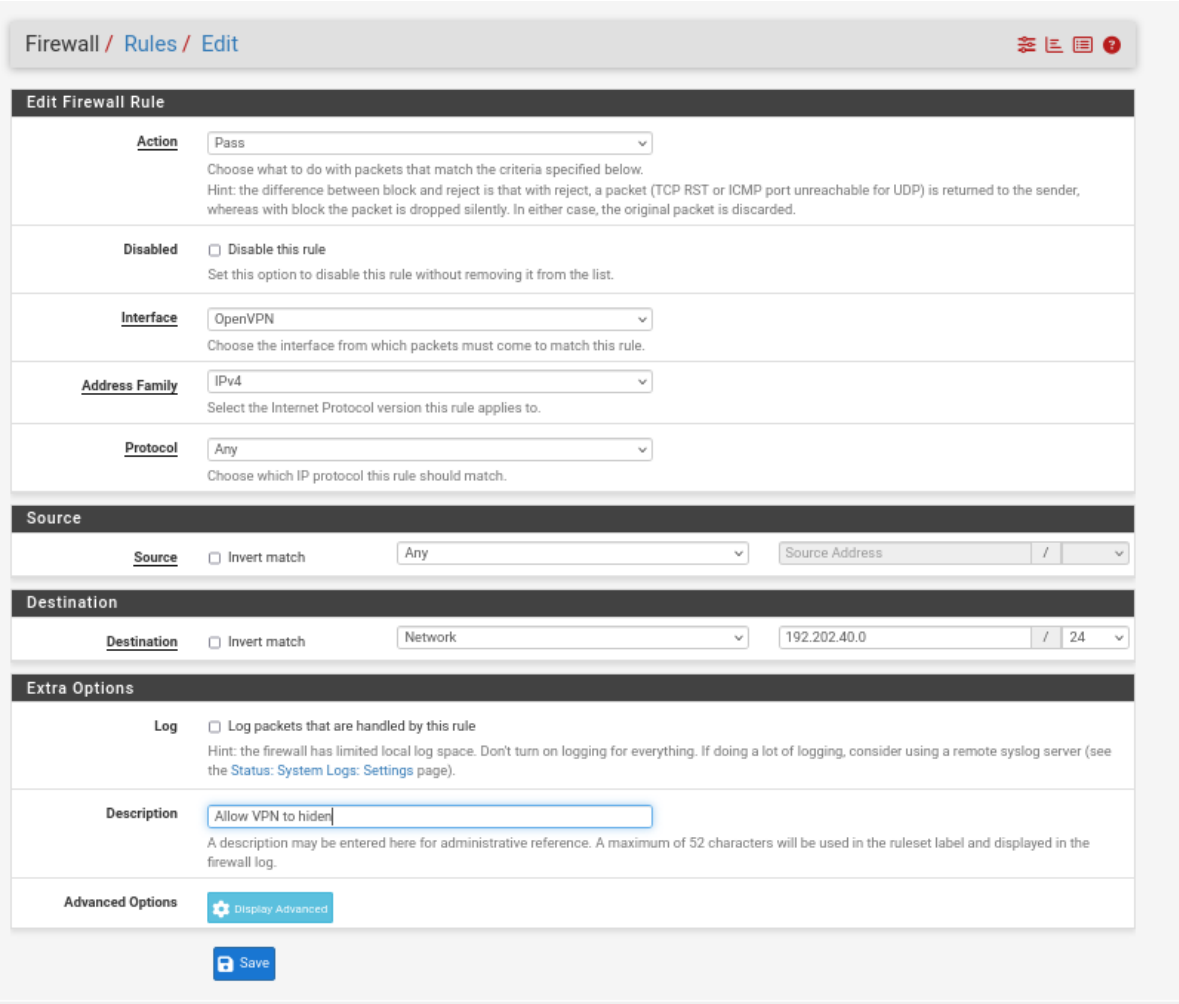
Firewall / Rules / Edit
Edit Firewall Rule
Action
Pass
Choose what to do with packets that match the criteria specified below.
Hint: the difference between block and reject is that with reject, a packet (TCP RST or ICMP port unreachable for UDP) is returned to the sender, whereas with block the packet is dropped silently. In either case, the original packet is discarded.
Disabled
Disable this rule
Set this option to disable this rule without removing it from the list.
Interface
OpenVPN
Choose the interface from which packets must come to match this rule.
Address Family
IPv4
Select the Internet Protocol version this rule applies to.
Protocol
Any
Choose which IP protocol this rule should match.
Source
Source
Invert match
Any
Source Address
Destination
Destination
Invert match
Network
192.202.40.0
24
Extra Options
Log
Log packets that are handled by this rule
Hint: the firewall has limited local log space. Don't turn on logging for everything. If doing a lot of logging, consider using a remote syslog server (see the Status: System Logs: Settings page).
Description
Allow VPN to hiden
A description may be entered here for administrative reference. A maximum of 52 characters will be used in the ruleset label and displayed in the firewall log.
Advanced Options
Display Advanced
Save

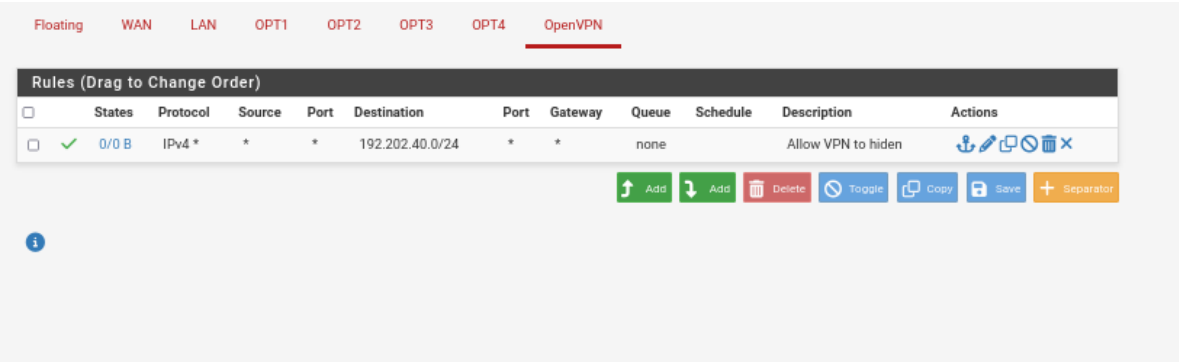
Floating
WAN
LAN
OPT1
OPT2
OPT3
OPT4
OpenVPN
Rules (Drag to Change Order)
States
Protocol
Source
Port
Destination
Port
Gateway
Queue
Schedule
Description
Actions
0/0 B
IPv4 *
*
*
192.202.40.0/24
*
*
none
Allow VPN to hiden
Add
Add
Delete
Toggle
Copy
Save
Separator

Exportar

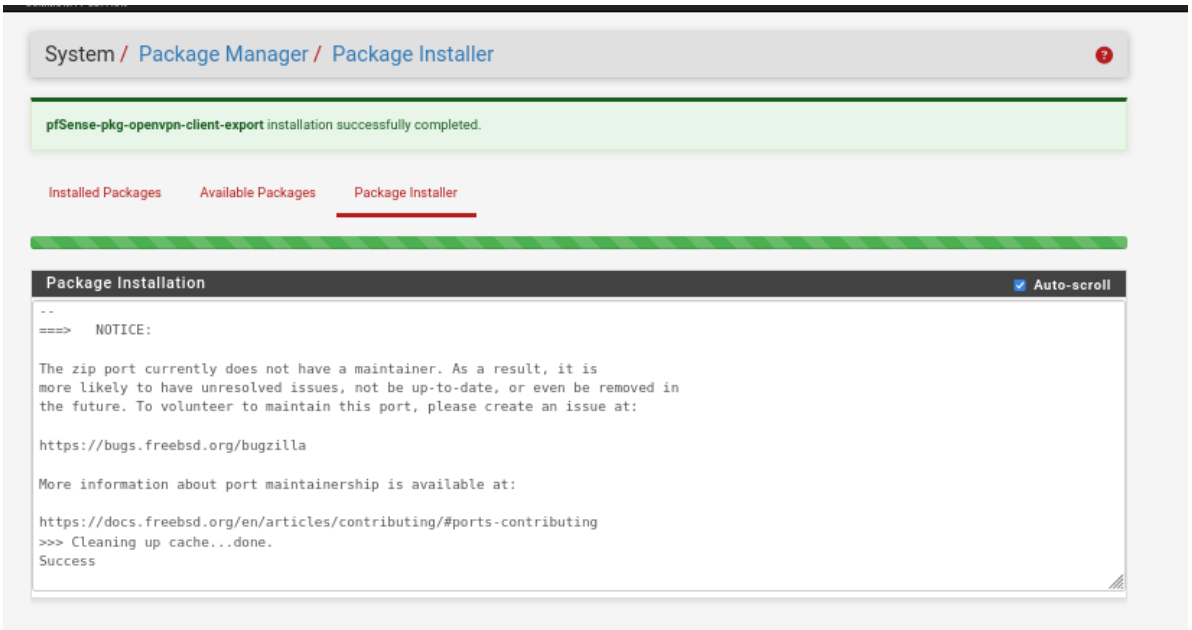

Inicialización

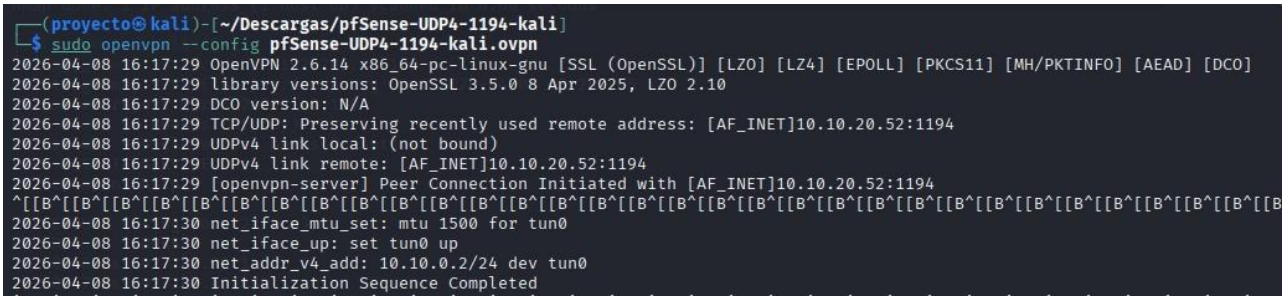

```
┌──(proyecto㉿kali)-[~/Descargas/pfSense-UDP4-1194-kali]
└─$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
       valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
       valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether bc:24:11:0f:1b:10 brd ff:ff:ff:ff:ff:ff
    inet 192.202.99.128/24 brd 192.202.99.255 scope global noprefixroute eth0
       valid_lft forever preferred_lft forever
    inet6 fe80::e899:7a58:90c9:aee9/64 scope link noprefixroute
       valid_lft forever preferred_lft forever
3: tun0: <POINTOPOINT,MULTICAST,NOARP,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UNKNOWN group default qlen 500
    link/none
    inet 10.10.0.2/24 scope global tun0
       valid_lft forever preferred_lft forever
    inet6 fe80::662b:63ca:6762:6f0e/64 scope link stable-privacy proto kernel_ll
       valid_lft forever preferred_lft forever
```

```
┌──(proyecto㉿kali)-[~/Descargas/pfSense-UDP4-1194-kali]
└─$ ip route
default via 192.202.99.1 dev eth0 proto static metric 100
10.10.0.0/24 dev tun0 proto kernel scope link src 10.10.0.2
192.202.40.0/24 via 10.10.0.1 dev tun0
192.202.99.0/24 dev eth0 proto kernel scope link src 192.202.99.128 metric 100

┌──(proyecto㉿kali)-[~/Descargas/pfSense-UDP4-1194-kali]
└─$
```

```
┌──(proyecto㉿kali)-[~/Descargas/pfSense-UDP4-1194-kali]
└─$ ping 192.202.40.1
PING 192.202.40.1 (192.202.40.1) 56(84) bytes of data.
64 bytes from 192.202.40.1: icmp_seq=1 ttl=64 time=0.649 ms
64 bytes from 192.202.40.1: icmp_seq=2 ttl=64 time=0.511 ms
64 bytes from 192.202.40.1: icmp_seq=3 ttl=64 time=0.593 ms
64 bytes from 192.202.40.1: icmp_seq=4 ttl=64 time=0.531 ms
64 bytes from 192.202.40.1: icmp_seq=5 ttl=64 time=0.602 ms
64 bytes from 192.202.40.1: icmp_seq=6 ttl=64 time=0.473 ms
64 bytes from 192.202.40.1: icmp_seq=7 ttl=64 time=0.506 ms
^C
--- 192.202.40.1 ping statistics ---
7 packets transmitted, 7 received, 0% packet loss, time 6141ms
rtt min/avg/max/mdev = 0.473/0.552/0.649/0.058 ms

┌──(proyecto㉿kali)-[~/Descargas/pfSense-UDP4-1194-kali]
└─$
```

```
┌──(proyecto㉿kali)-[~/Descargas/pfSense-UDP4-1194-kali]
└─$ nmap -sn 192.202.40.0/24
Starting Nmap 7.95 ( https://nmap.org ) at 2026-04-08 16:26 -05
Nmap scan report for 192.202.40.1
Host is up (0.00088s latency).
Nmap scan report for 192.202.40.4
Host is up (0.0010s latency).
Nmap scan report for 192.202.40.189
Host is up (0.0012s latency).
Nmap scan report for 192.202.40.231
Host is up (0.0090s latency).
Nmap done: 256 IP addresses (4 hosts up) scanned in 4.45 seconds

┌──(proyecto㉿kali)-[~/Descargas/pfSense-UDP4-1194-kali]
└─$
```