




## USB

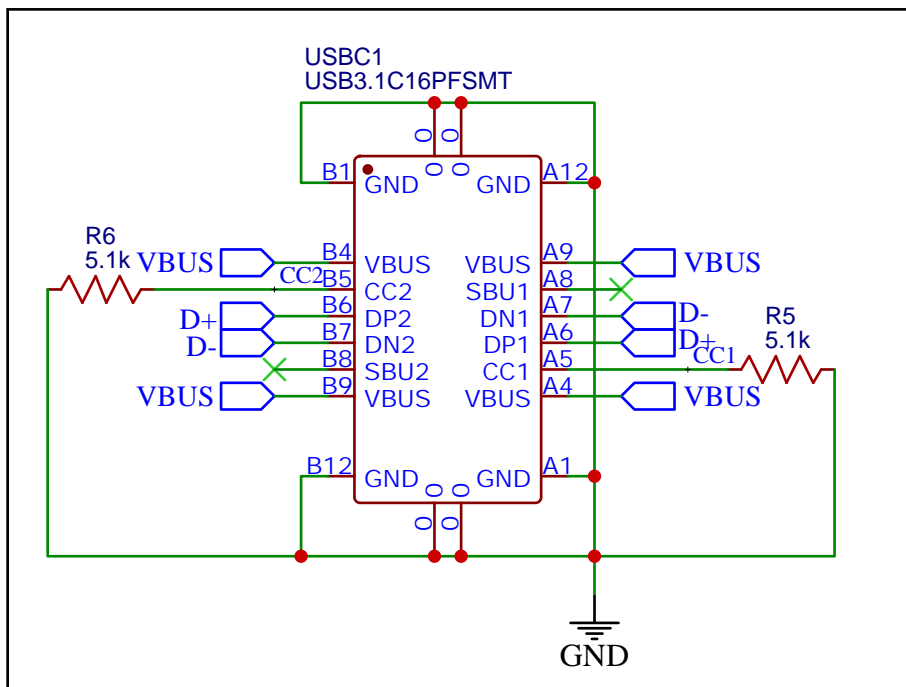


## Resistors

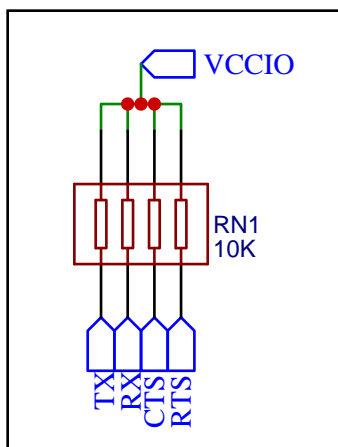


## Output Header

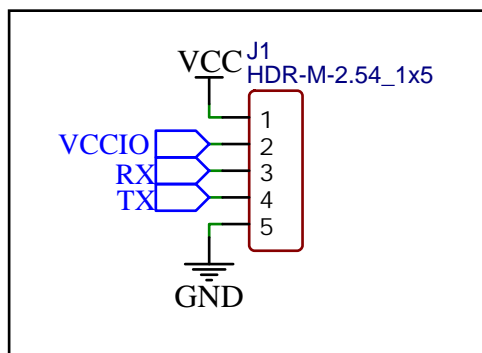


## Caps



## Optional Voltage Regulator

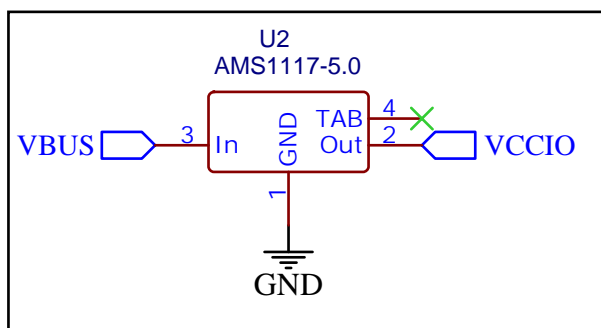

## USB FTDI Converter

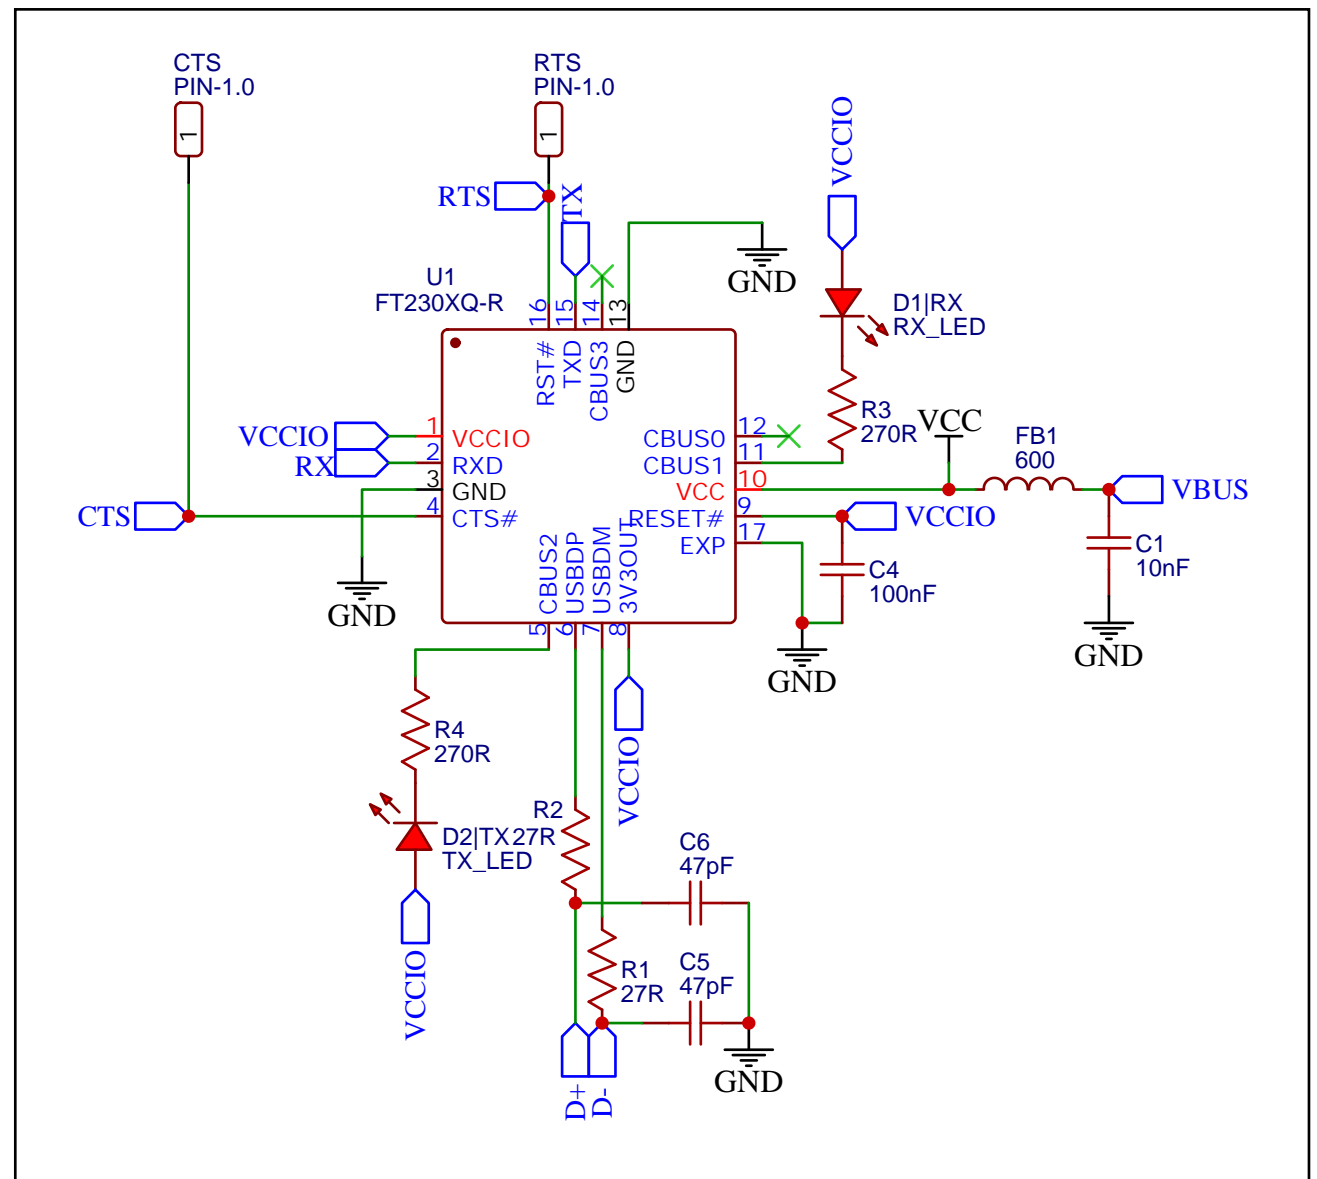

Note:

Internal regulator has max current of 50mA @3.3V.  
Break trace with asterix (\*) on circuit board if using external voltage regulator.  
Must be 1.8-3.3V.