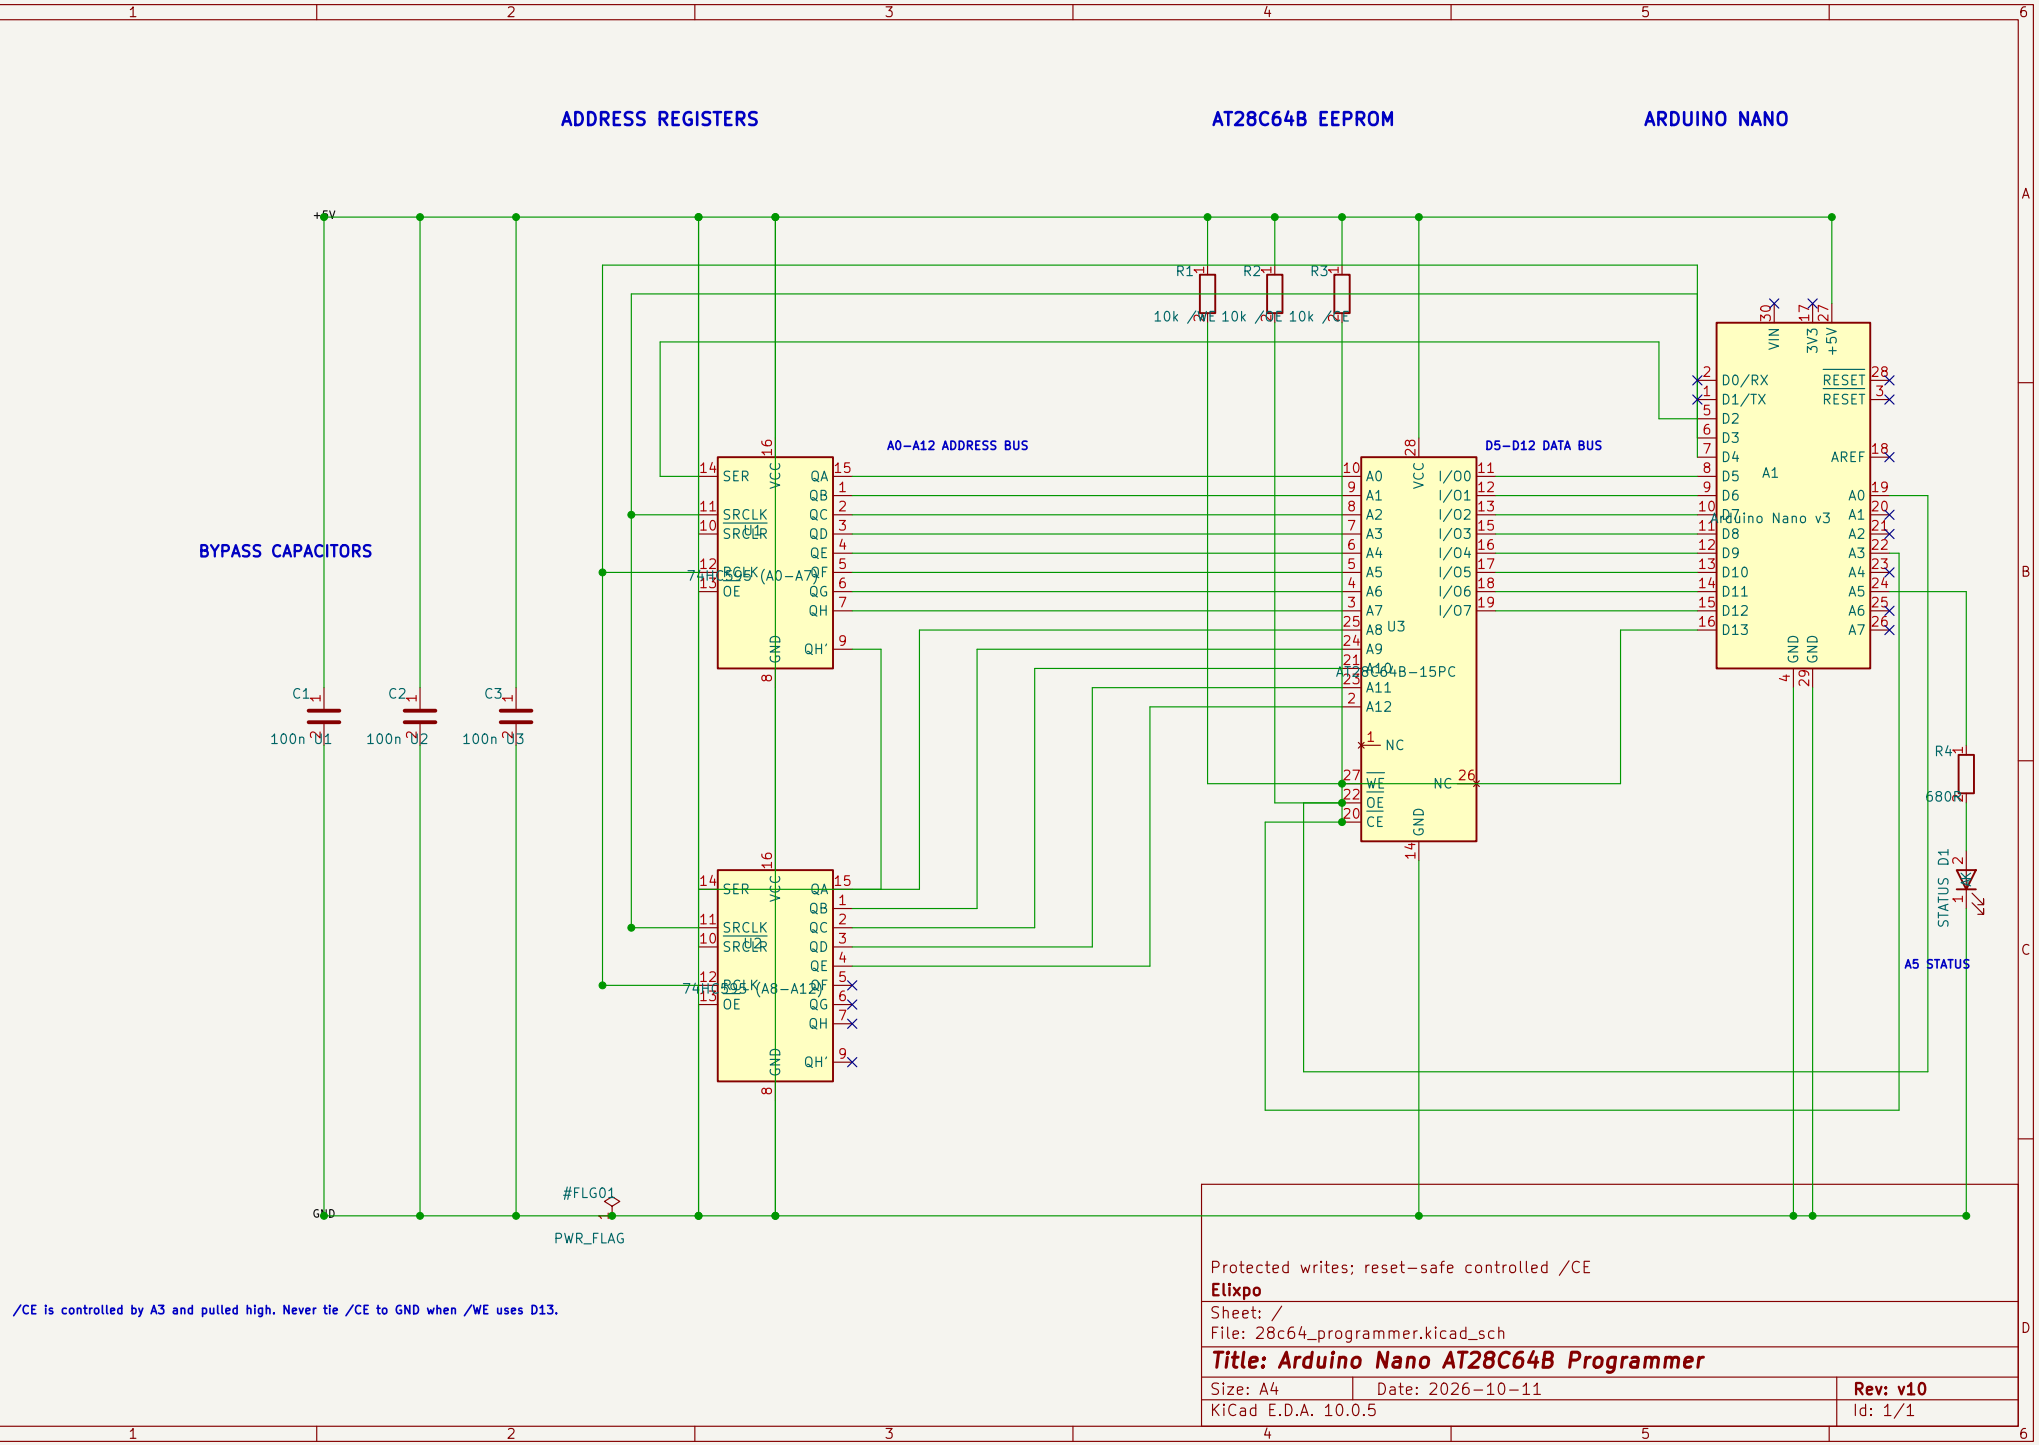

ADDRESS REGISTERS
AT28C64B EEPROM
ARDUINO NANO
BYPASS CAPACITORS
A0–A12 ADDRESS BUS
D5–D12 DATA BUS
+5V
GND
C1
100n
C2
100n
C3
100n
R1
10k
/WE
R2
10k
/OE
R3
10k
/CE
R4
680R
STATUS D1
A5 STATUS
U1
74HC595 (A0–A7)
U2
74HC595 (A8–A12)
U3
AT28C64B-15PC
Arduino Nano v3
#FLG01
PWR_FLAG
/CE is controlled by A3 and pulled high. Never tie /CE to GND when /WE uses D13.
Protected writes; reset-safe controlled /CE
Elixpo
Sheet: /
File: 28c64_programmer.kicad_sch
Title: Arduino Nano AT28C64B Programmer
Size: A4
Date: 2026-10-11
Rev: v10
KiCad E.D.A. 10.0.5
Id: 1/1