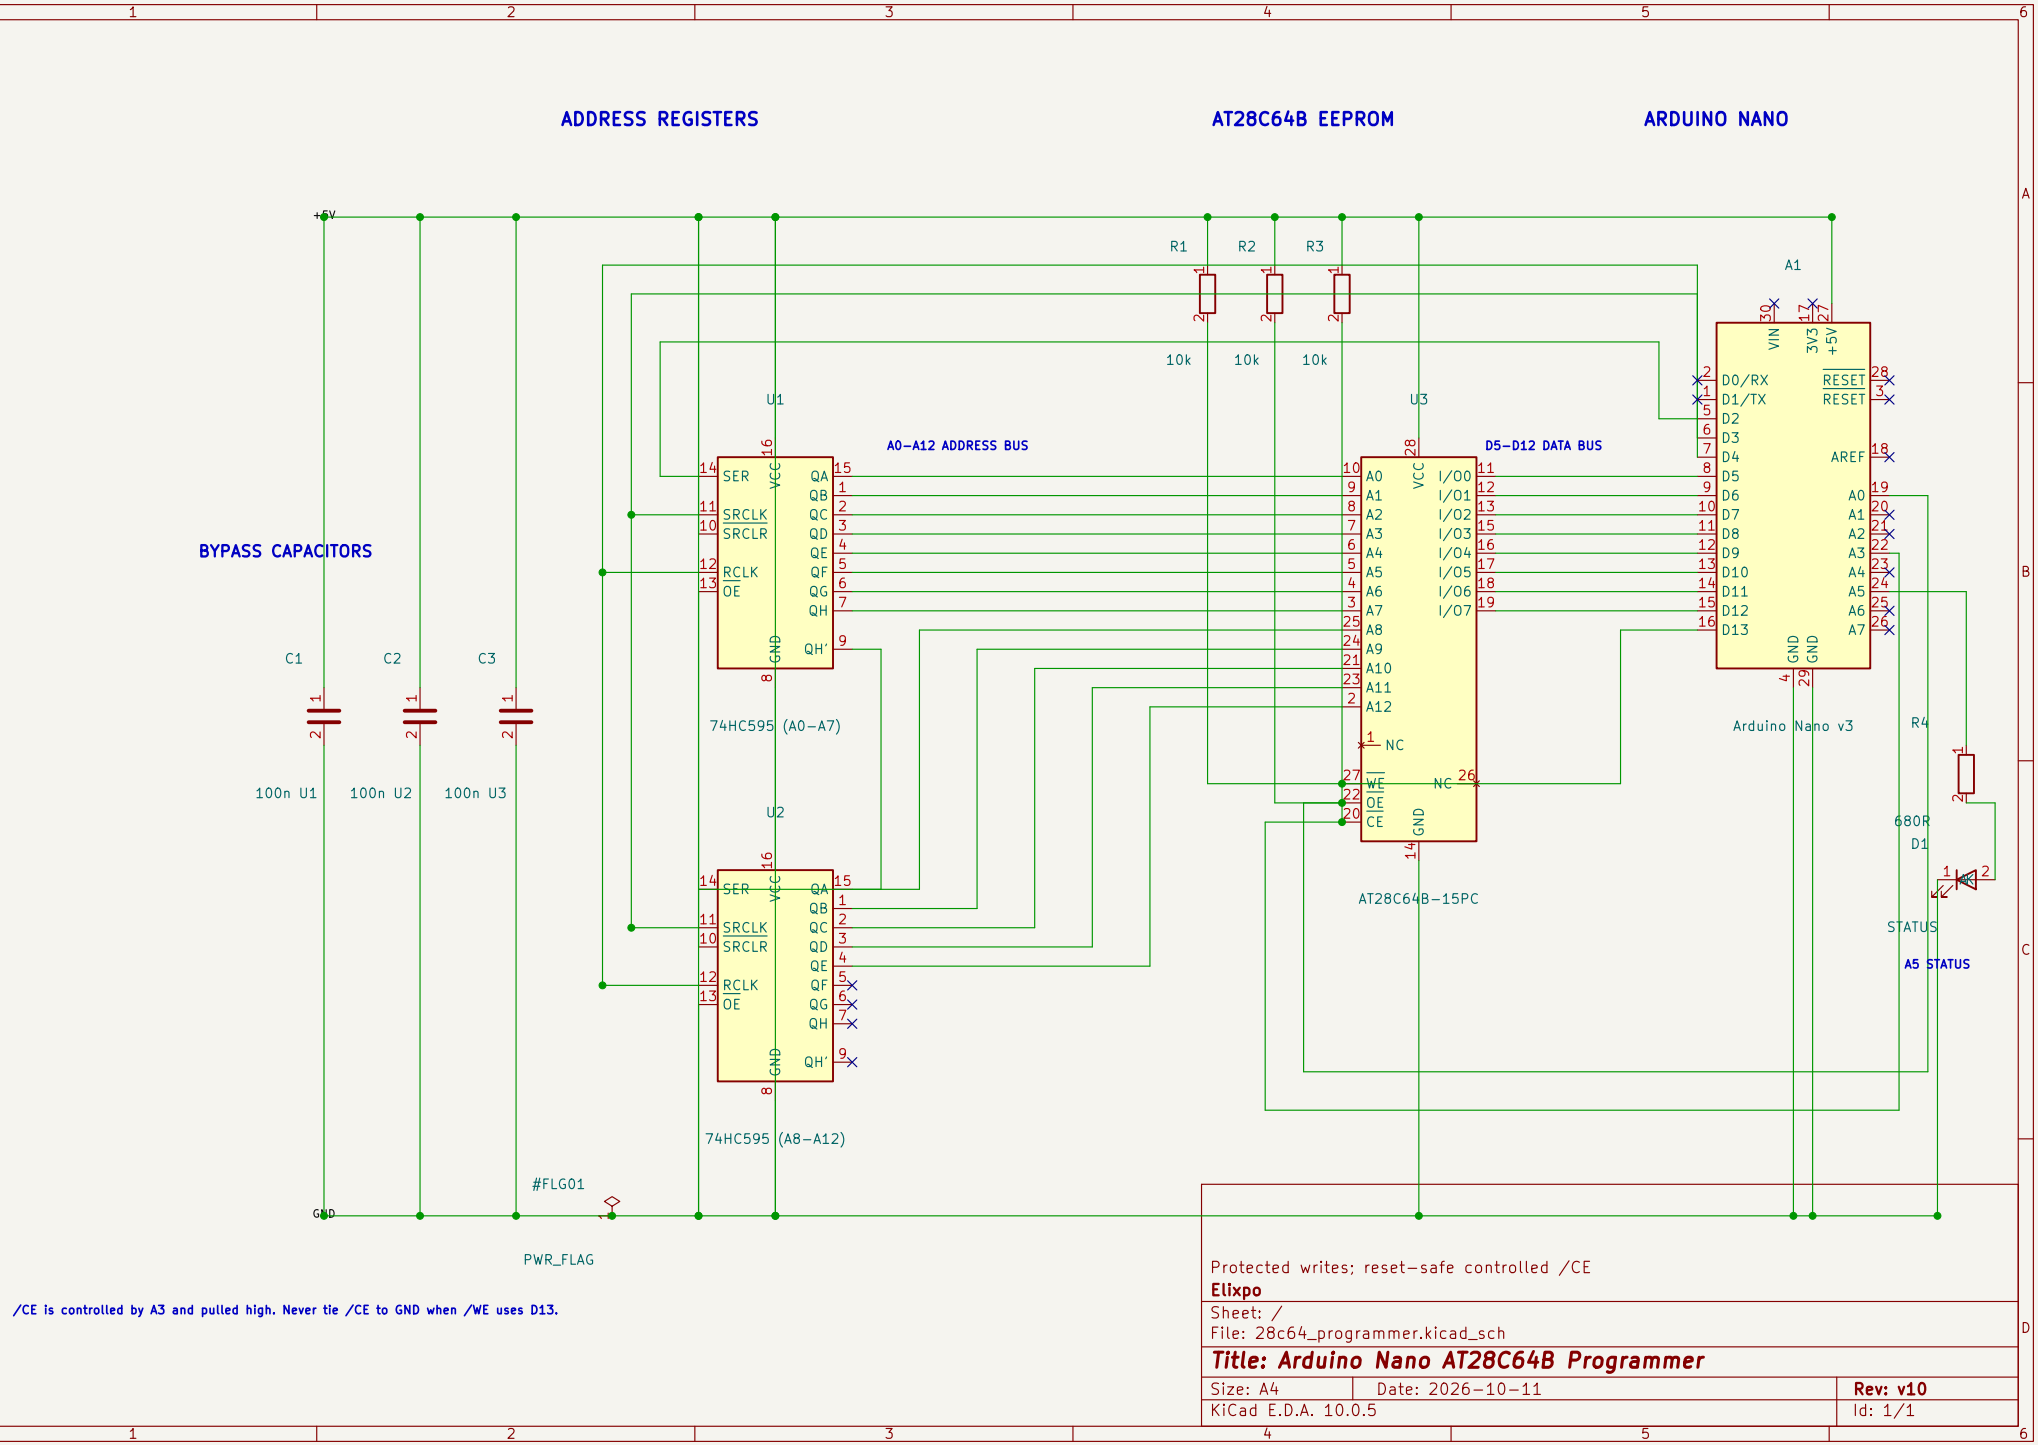

ADDRESS REGISTERS
AT28C64B EEPROM
ARDUINO NANO
BYPASS CAPACITORS
A0–A12 ADDRESS BUS
D5–D12 DATA BUS
74HC595 (A0–A7)
74HC595 (A8–A12)
AT28C64B–15PC
Arduino Nano v3
100n U1
100n U2
100n U3
10k
680R
STATUS
A5 STATUS
PWR_FLAG
/CE is controlled by A3 and pulled high. Never tie /CE to GND when /WE uses D13.
Protected writes; reset–safe controlled /CE
Elixpo
Sheet: /
File: 28c64_programmer.kicad_sch
Title: Arduino Nano AT28C64B Programmer
Size: A4
Date: 2026–10–11
Rev: v10
KiCad E.D.A. 10.0.5
Id: 1/1