
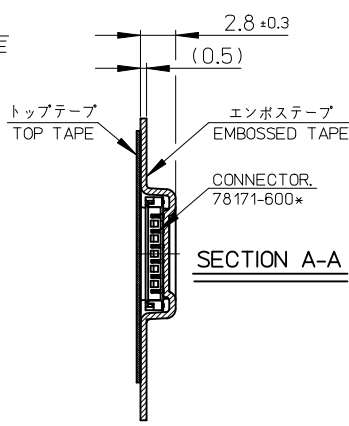
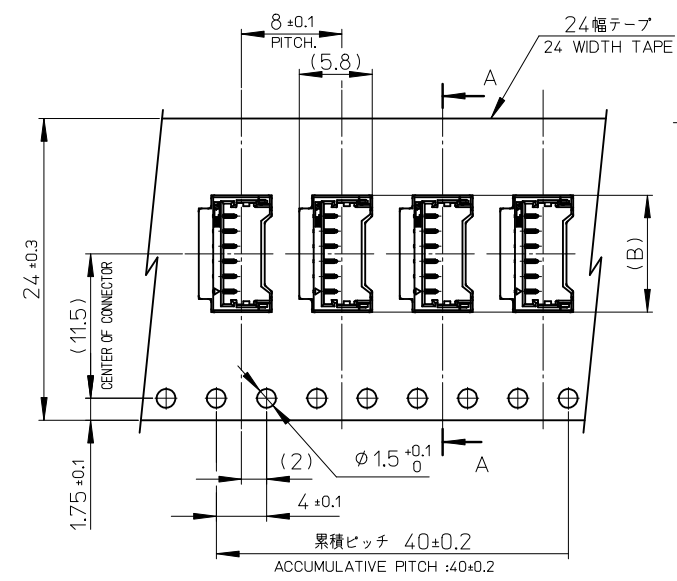


NOTES

- 製品詳細につきましては、SD-78171-002 を参照下さい。
RE DETAILED DIMENSION, SEE SD-78171-002.
- 梱包数量：4,500 個/リール
NUMBER OF CONNECTORS:4,500PCS/REEL.
- リードテープの長さ
LEAD TAPE LENGTH.
- 材料 (MATERIAL)
キャリアテープ (CARRIER TAPE) : POLYPROPYLENE - PP
トップテープ (TOP TAPE) : PET, PE, PE
リール (REEL) : ポリスチレン (POLYSTYRENE) <リサイクル材を含む>
<RECYCLE MATERIAL CONTAINED.>
- 製品の取扱いについては取扱説明書 "AS-78172-001" を参照願います。
REFER TO INSTRUCTION MANUAL "AS-78172-001"
- ELV 及び RoHS 適合品
ELV AND RoHS COMPLIANT.


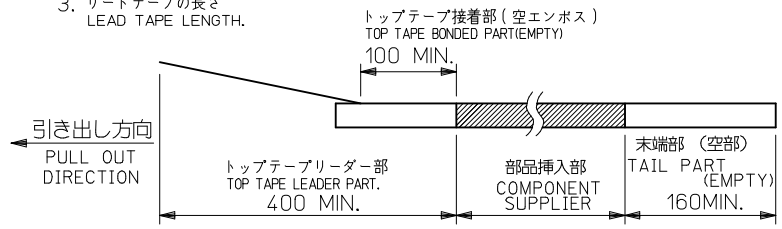


10.5	78171-6007	78171-5007	7	78171-500*
9.3	78171-6006	78171-5006	6	
B	CONNECTOR	MATERIAL NO.	CKT.	MODEL NO.

REVISED EC NO: J2016-0282 DRAWN: TAKAIKE CHKD: KASAKAWA APPR: NUKITA	DESCRIPTION 2015/09/14 2015/09/15 2015/09/15	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION				
		0.25 UNDER ±0.03			DRAWN BY	DATE	TITLE EMBOSSED TAPE PKG FOR 78171						
		0.25 OVER 0.5 UNDER ±0.05			T.ODA	'08/11/07							
		0.5 OVER 1.0 UNDER ±0.1			CHECKED BY	DATE	DOCUMENT NO. SD-78171-001						
		1.0 OVER 10 UNDER ±0.2			SA.SATO	'08/11/07							
		10 OVER 30 UNDER ±0.25			APPROVED BY	DATE	molex						
		30 OVER ±0.3			S. ICHIKAWA	'08/11/07							
		ANGULAR ±3 °			MATERIAL NO.							SHEET NO.	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE TABLE							1 OF 1	
	REV					SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

10 9 8 7 6 5 4 3 2 1

CKT No.1

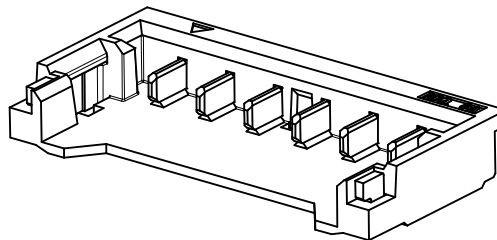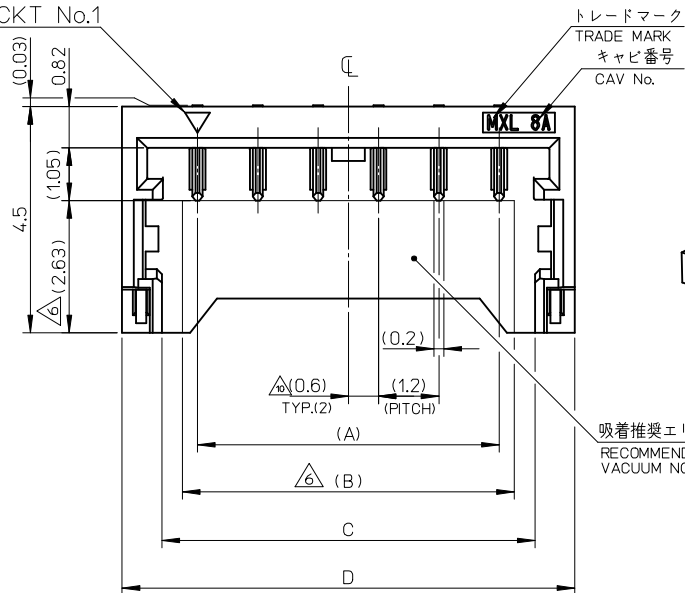

吸着推奨エリア
RECOMMENDED CHIPMOUNTER
VACUUM NOZZLE AREA

注記: 1. 材質 ハウジング: PA46, UL94V-0色: 黒
NOTES. MATERIALS HOUSING: PA46, UL94V-0, COLOUR:BLACK

ターミナル: 銅合金
TERMINAL: COPPER ALLOY
ネイル: 銅合金
FITTING NAIL: COPPER ALLOY
ターミナル: 金メッキ0.1μmMIN, ニッケル下地メッキ 1.0μm MIN
TERMINAL: GOLD 0.1μmMIN, WITH 1.0μm MIN NICKEL UNDERPLATE OVERALL
ネイル: 錫メッキ 1.5 μm MIN ニッケル下地メッキ 1.0 μm MIN
FITTING NAIL: 1.5 μm MIN TIN WITH 1.0 μm MIN NICKEL UNDERPLATE OVERALL

3. 嵌合相手: 78172-500*
MATING WITH: 極数 No. CIRCUIT No.

4. 梱包形態: エンボスリール梱包 (詳細はSD-78171-001 を参照願います)
PACKAGING SPECIFICATION: EMBOSSED TAPE (REFER TO SD-78171-001)

製品番号は右記の内容を示す: 78171-600*
PRODUCT NUMBER INDICATES FOLLOWING

吸着推奨エリアを示す
SHOWS VACUUM NOZZLE AREA.





7. ソルダータールとネイルの平坦度: 0.10 mm MAX
SOLDER TAIL AND FITTING NAIL COPLANARITY 0.1mm MAX.

8. ELV及びRoHS 適合品
ELV AND RoHS COMPLIANT.


9. 製品の取扱いについては取扱説明書"AS-78172-001"を参照願います
REFER TO INSTRUCTION MANUAL "AS-78172-001"

偶数極の製品に適用
APPLY EVEN CIRCUIT PRODUCTS

コネクタ外形図
CONNECTOR OUTLINE

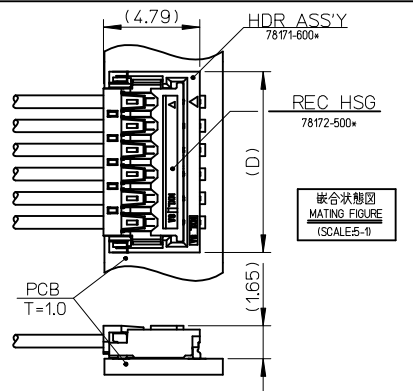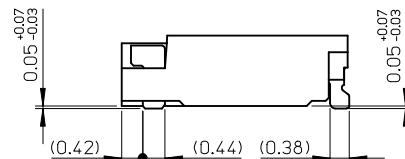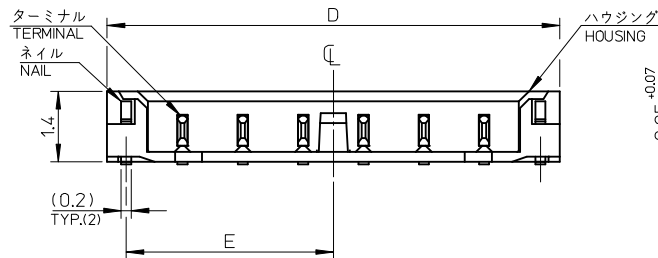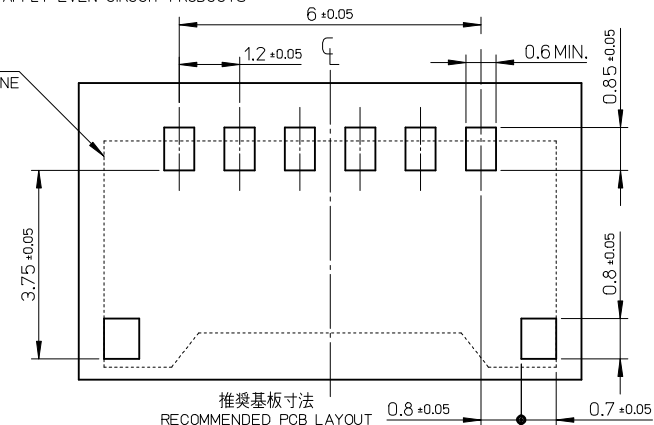

7.2	7.8	8.62	10.2	4.72	7	78171-5007	78171-6007	78171-600*
6	6.6	7.42	9	4.12	6	78171-5006	78171-6006	
A	B	C	D	E	CKT	PACKING FORM: EMBOSSED TAPE	MATERIAL NO.	MODEL NO.
						ORDER No.		

REVISED EC NO: J2016-0282 DRWN: TAKAIKE CHKD: KASAKAWA APPR: NUKITA G	DESCRIPTION 2015/09/14 2015/09/15 2015/09/15	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
		0.25 UNDER		± 0.03	DRAWN BY T.ODA	DATE 08/06/20	TITLE 1.2W/B CONN. HDR ASS'Y		
		0.25 OVER 0.5 UNDER		± 0.05	CHECKED BY	DATE			
		0.5 OVER 1.0 UNDER		± 0.1	SA.SATO	08/06/20			
		1.0 OVER 10 UNDER		± 0.2	APPROVED BY	DATE	molex		
		10 OVER 30 UNDER		± 0.25	NUKITA	2010/10/25			
		30 OVER		± 0.3	MATERIAL NO.	DOCUMENT NO.		SHEET NO. 1 OF 1	
		ANGULAR ±3 °			SEE TABLE		SD-78171-002		
REV	G	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			