



Released under the CC Attribution Share-Alike 3.0 License



<http://creativecommons.org/licenses/by-sa/3.0/>

Linux Module
MODEL: LG08.v1.0.2
2018/6/20 10:26
Sheet: 1/6

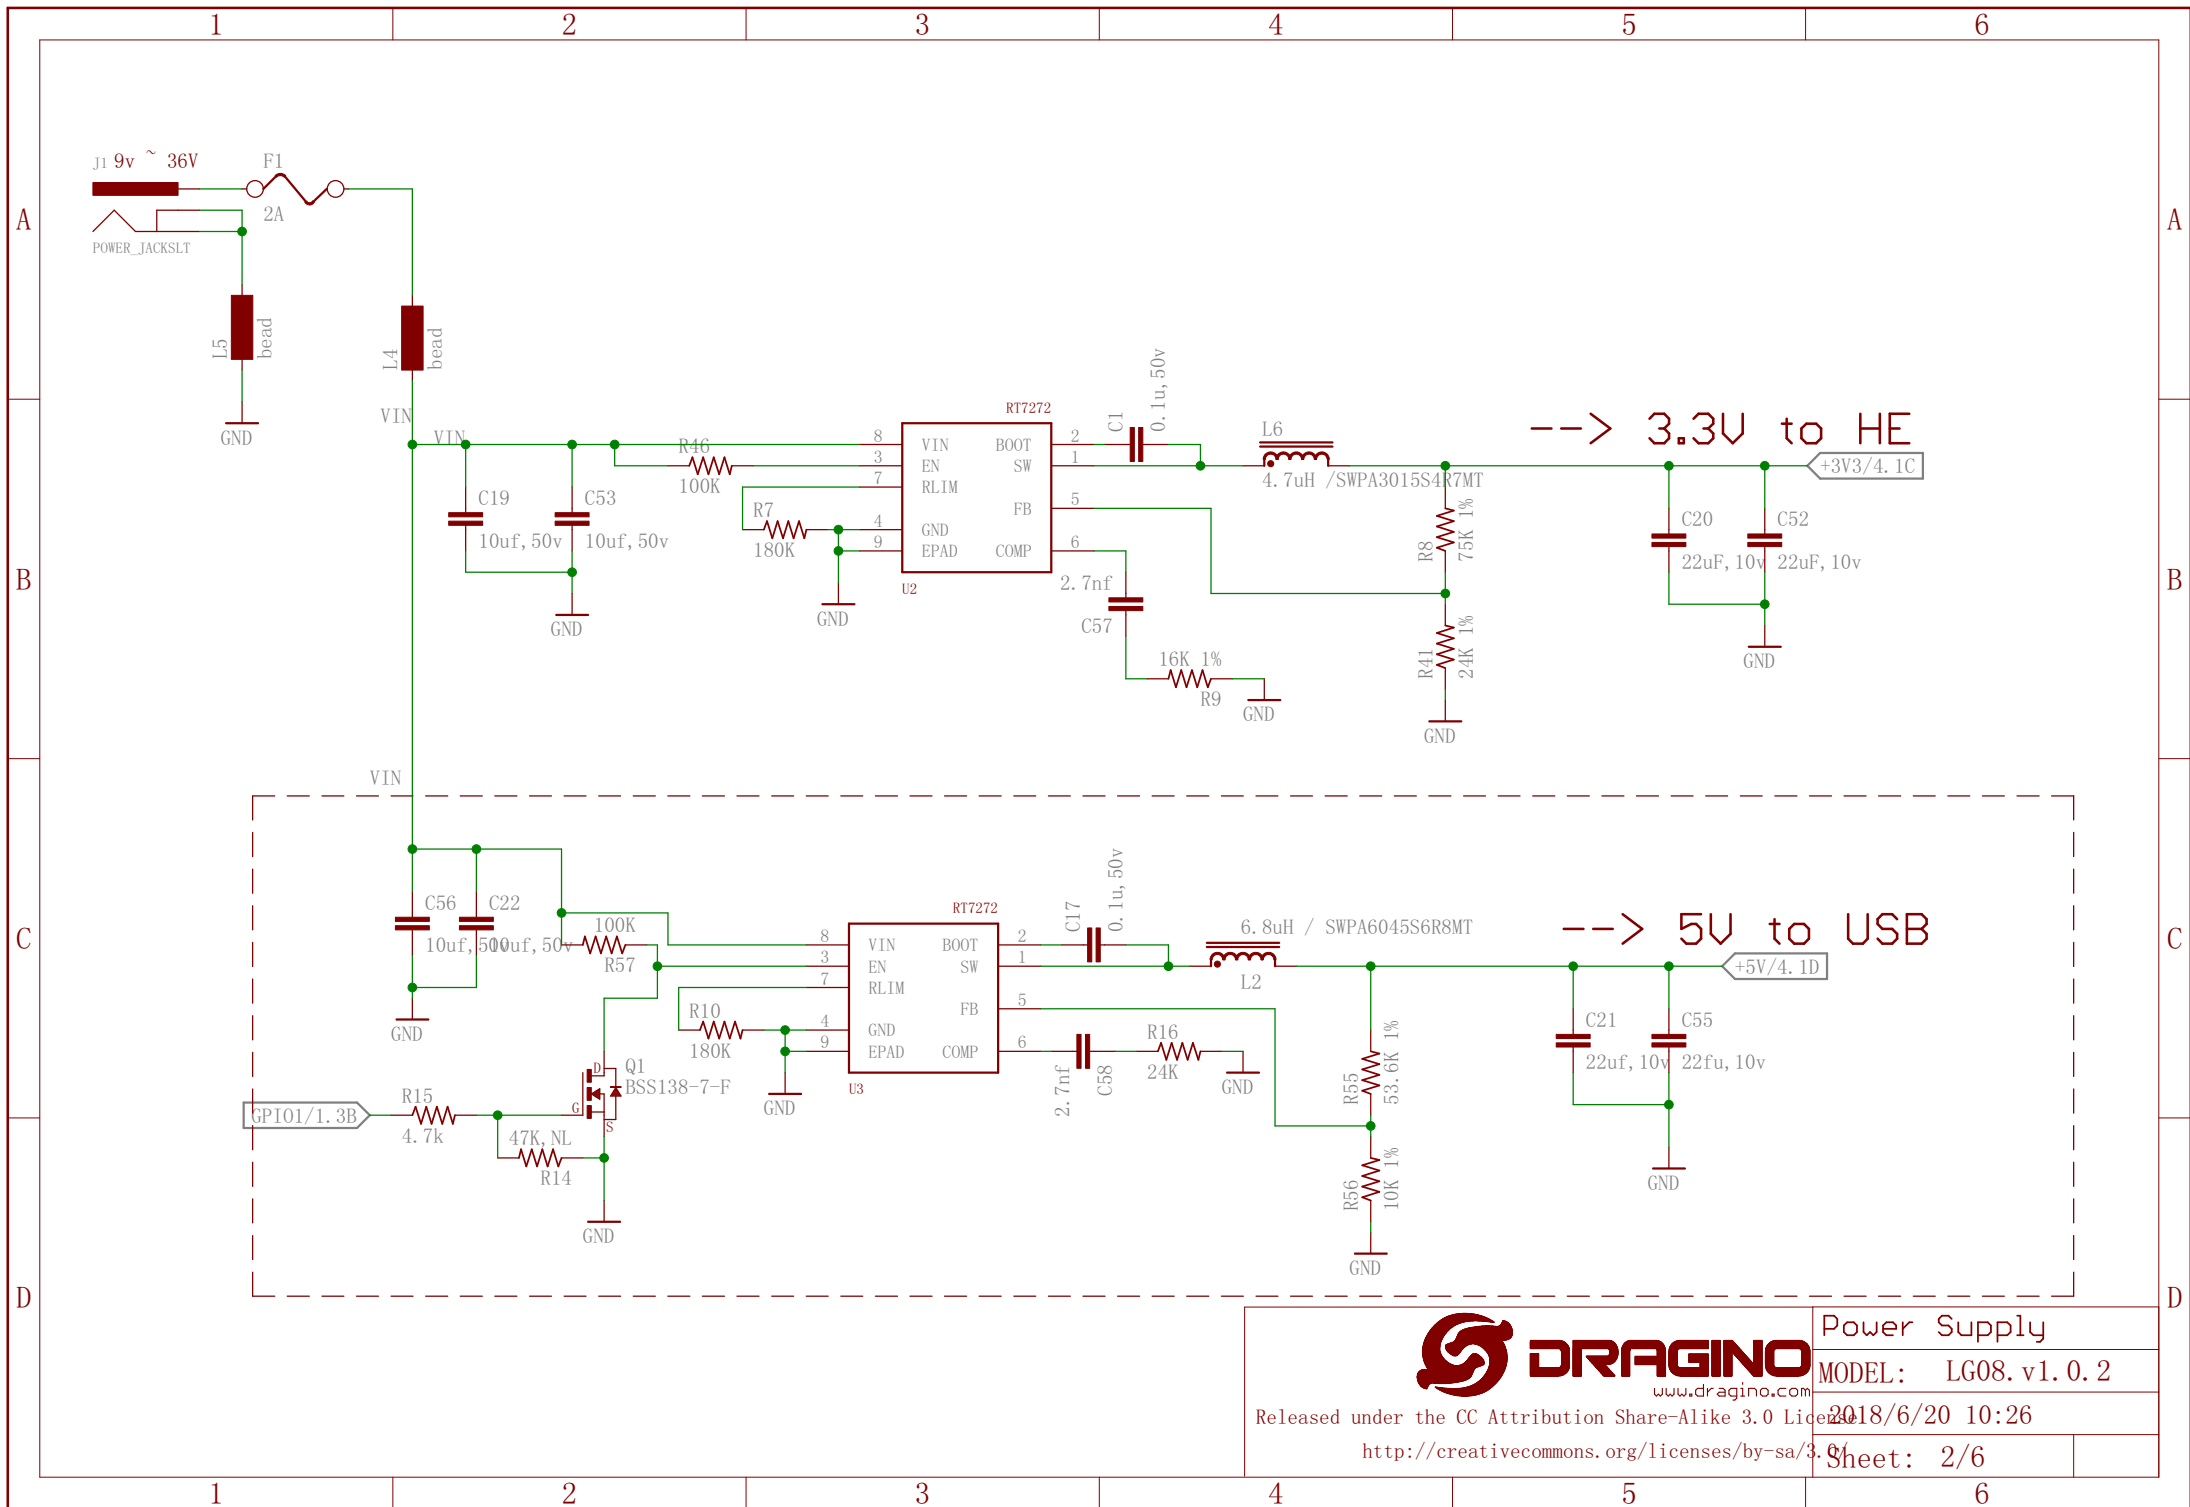

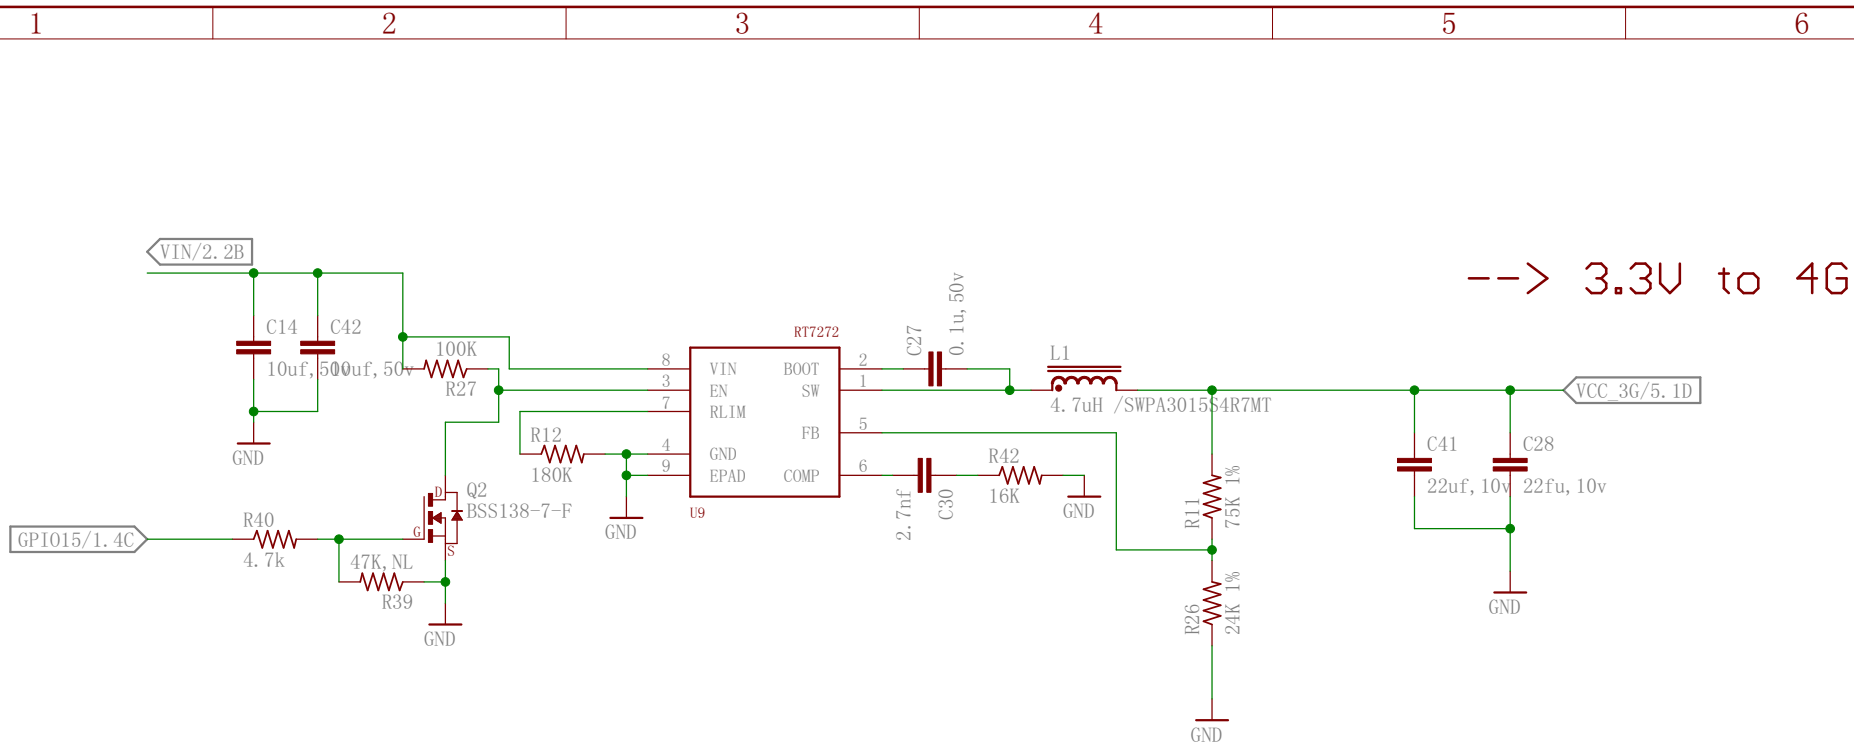



Ethernet

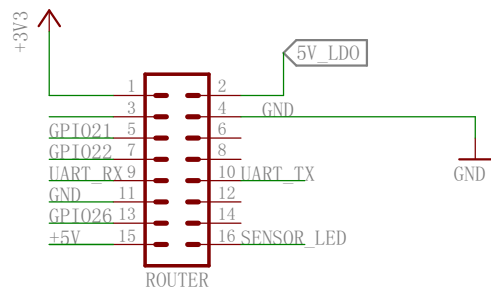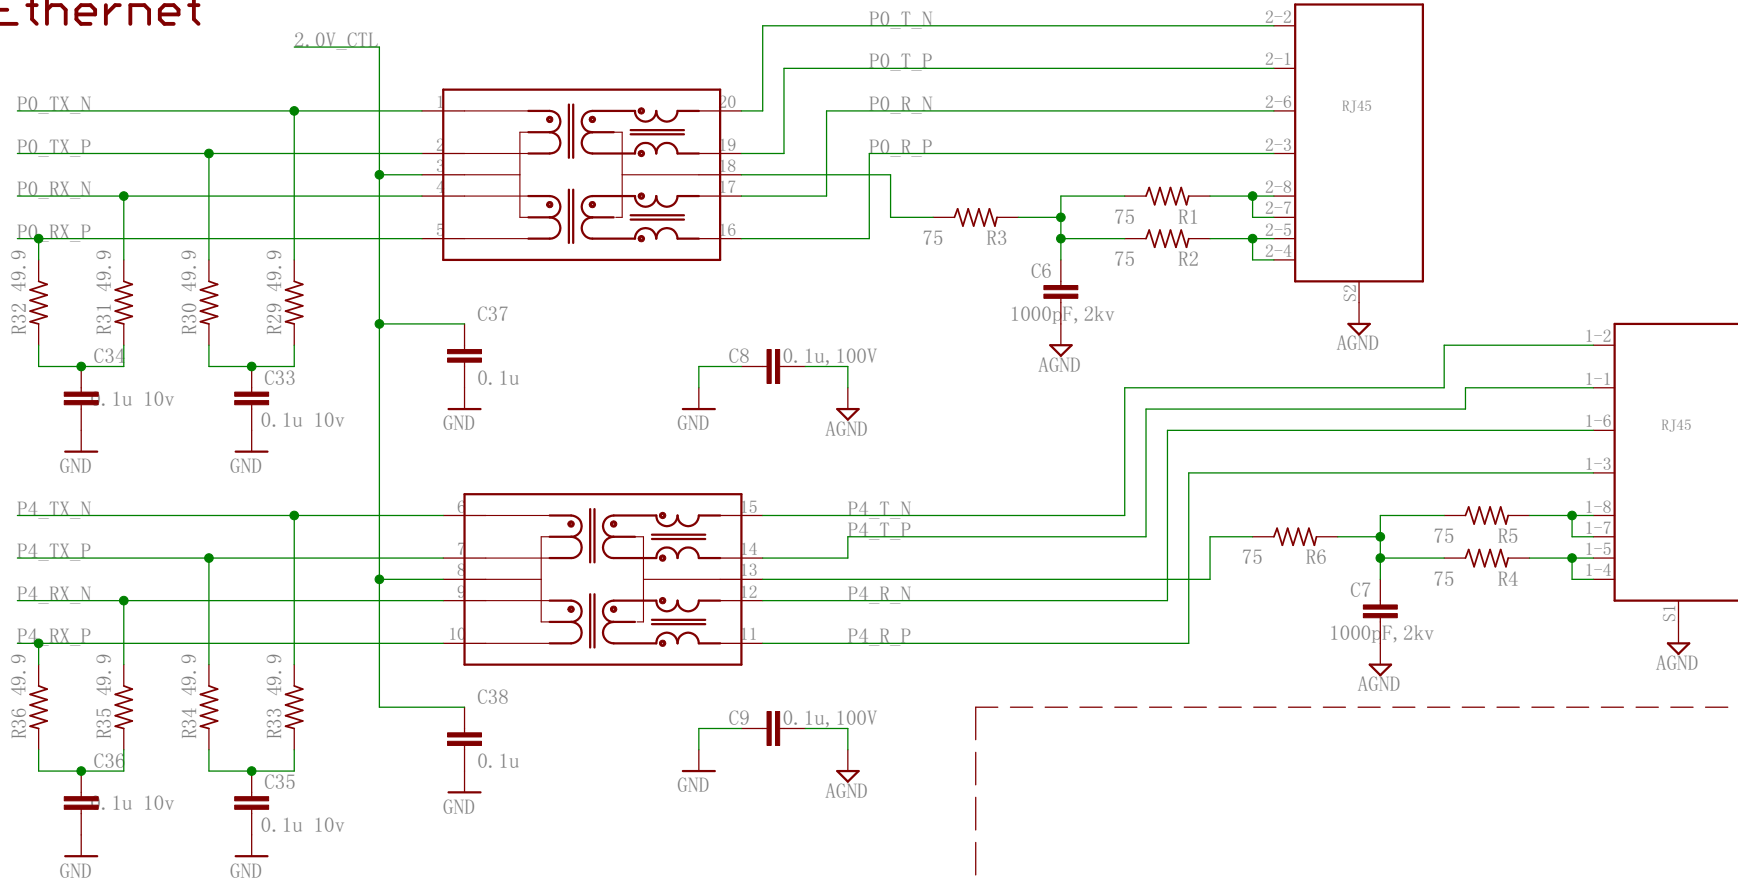





Released under the CC Attribution Share-Alike 3.0 License
<http://creativecommons.org/licenses/by-sa/3.0/>

RJ45 Connectors
 MODEL: LG08.v1.0.2
 2018/6/20 10:26
 Sheet: 4/6


LEDs

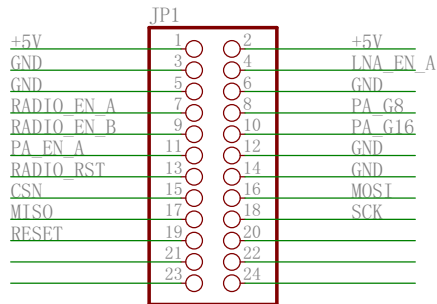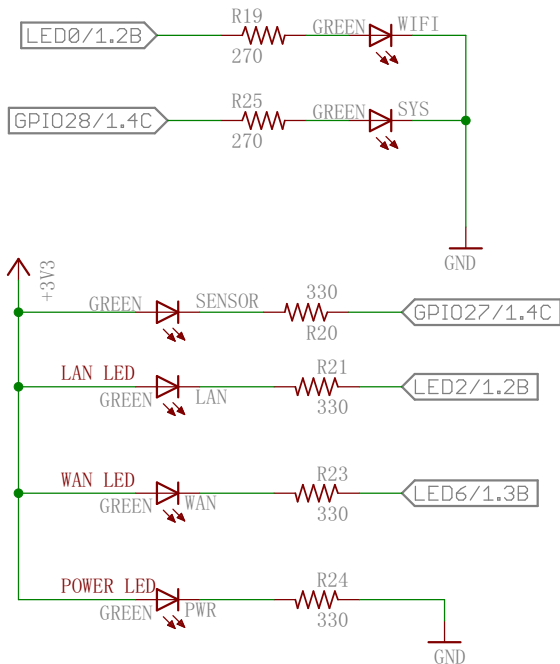

Programmable Button

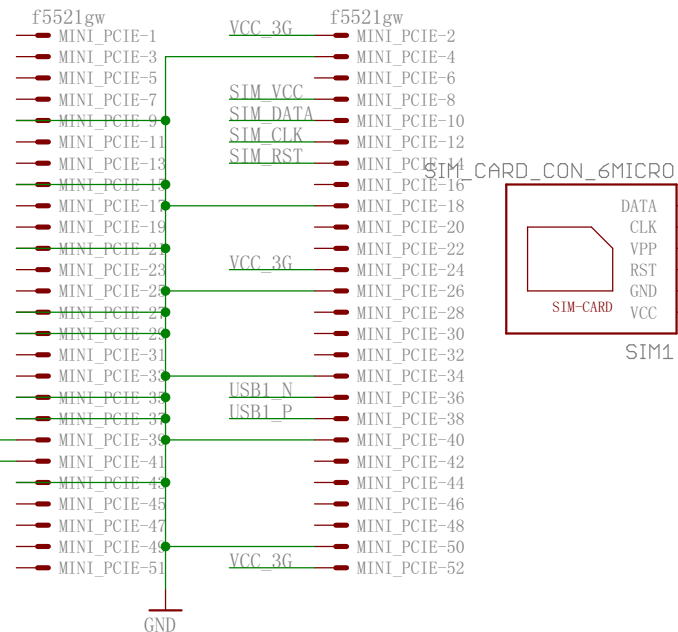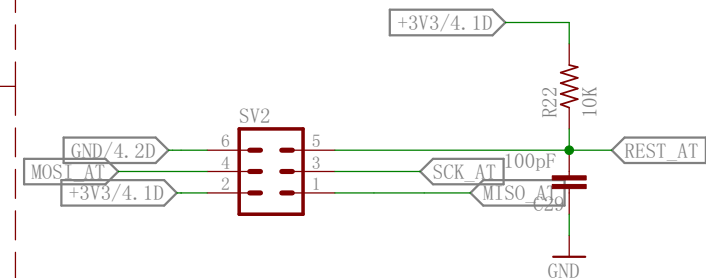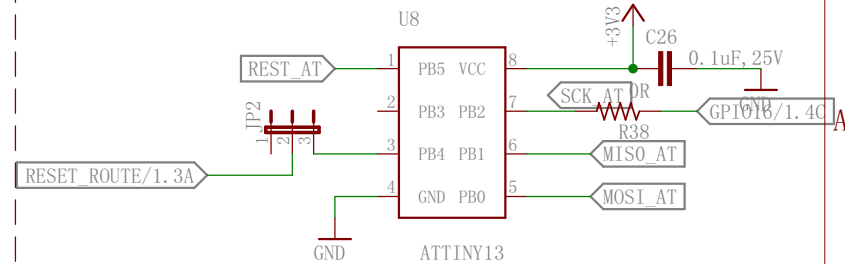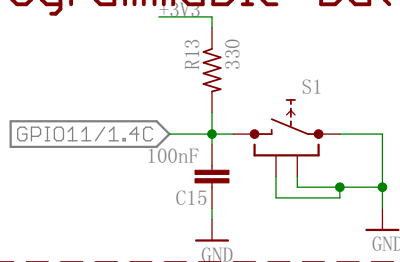

USIM_CLK and USIM_DATA should be routed separate and surround by GND

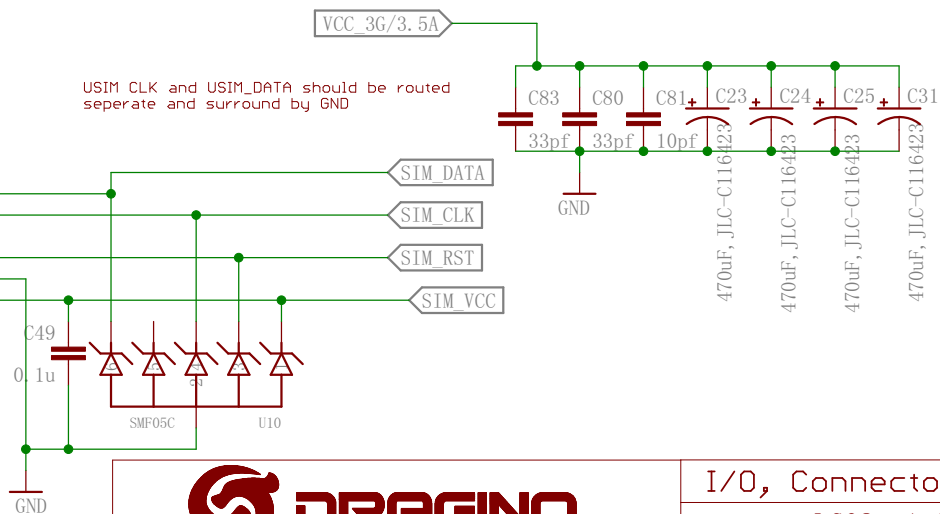

Released under the CC Attribution Share-Alike 3.0 License
<http://creativecommons.org/licenses/by-sa/3.0/>

I/O, Connectors
MODEL: LG08.v1.0.2
2018/6/20 10:26
Sheet: 5/6

A

B

C

D

A

B

C

D

