

BeagleBone CANBus Cape



System Reference Manual

Revision A1
September 28th, 2012

THIS DOCUMENT

This work is licensed under the Creative Commons Attribution-Share Alike 3.0 Unported License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/3.0/> or send a letter to Creative Commons, 171 Second Street, Suite 300, San Francisco, California, 94105, USA.

All derivative works are to be attributed to BeagleBoardtoys.com.

For more information, see <http://creativecommons.org/licenses/by-sa/3.0/>

For any questions, concerns, or issues submit them to support@beagleboardtoys.com

BEAGLEBONE CANBUS CAPE DESIGN

These design materials referred to in this document are ***NOT SUPPORTED*** and **DO NOT** constitute a reference design. Only “community” support is allowed via resources at Beagleboardtoys.com/support

THERE IS NO WARRANTY FOR THE DESIGN MATERIALS, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE DESIGN MATERIALS “AS IS” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND

FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE DESIGN MATERIALS IS WITH YOU. SHOULD THE DESIGN MATERIALS PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

We mean it; these design materials may be totally unsuitable for any purposes.

BeagleBoardToys provides the enclosed product(s) under the following conditions:

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by BeagleBoardtoys.com to be a finished end-product fit for general consumer use. Persons handling the product(s) must have electronics training and observe good engineering practice standards. As such, the goods being provided are not intended to be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including product safety and environmental measures typically found in end products that incorporate such semiconductor components or circuit boards. This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and therefore may not meet the technical requirements of these directives or other related directives.

Should this evaluation board/kit not meet the specifications indicated in the User's Guide, the board/kit may be returned within **30 days** from the date of delivery for a full refund. THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user indemnifies BeagleBoardtoys.com from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge.

EXCEPT TO THE EXTENT OF THE INDEMNITY SET FORTH ABOVE, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

BeagleBoardtoys.com currently deals with a variety of customers for products, and therefore our arrangement with the user **is not exclusive**. BeagleBoardtoys.com assumes **no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein**.

Please read the User's Guide and, specifically, the Warnings and Restrictions notice in the User's Guide prior to handling the product. This notice contains important safety information about temperatures and voltages. For additional information on BeagleBoardtoys.com environmental and/or safety programs, please contact visit BeagleBoardtoys.com.

No license is granted under any patent right or other intellectual property right of BeagleBoard.org covering or relating to any machine, process, or combination in which such BeagleBoardtoys.com products or services might be or are used.

Mailing Address:

Beagleboardtoys.com
1380 Presidential Dr. #100
Richardson, TX 75081
U.S.A.



WARRANTY: *The BeagleBone CANBus Cape is warranted against defects in materials and workmanship for a period of 90 days from purchase. This warranty does not cover any problems occurring as a result of improper use, modifications, exposure to water, excessive voltages, abuse, or accidents. All boards will be returned via standard mail if an issue is found. If no issue is found or express return is needed, the customer will pay all shipping costs.*

Before returning the board, please visit [Beagleboardtoys.com/support](http://beagleboardtoys.com/support)

To return a defective board, please request an RMA at
<http://www.beagleboardtoys.com/support/rma>



Table of Contents

FIGURES	7
TABLES	7
1.0 INTRODUCTION.....	9
2.0 CHANGE HISTORY.....	10
2.1 CHANGE HISTORY.....	10
3.0 BEAGLEBONE CANBUS CAPE OVERVIEW.....	11
3.1 DESCRIPTIONS.....	11
3.2 IN THE BOX	12
3.3 REPAIRS	12
4.0 FEATURES AND SPECIFICATIONS.....	13
4.1 KEY COMPONENT LOCATIONS	14
4.2 CAN BUS INTERFACE	14
4.3 POWER INDICATOR	15
4.4 MECHANICAL SPECIFICATIONS	15
4.5 ELECTRICAL SPECIFICATIONS	15
5.0 SYSTEM ARCHITECTURE AND DESIGN.....	16
5.1 SYSTEM BLOCK DIAGRAM.....	16
5.2 CAN TRANSCEIVER	16
5.3 ISOLATED POWER AND GROUND.....	17
5.4 CONTROLLER SIGNALS	17
5.5 EEPROM	18
5.5.1 EEPROM Address	19
5.5.2 I2C Bus.....	19
6.0 MECHANICAL INFORMATION.....	20
7.0 DESIGN MATERIALS	21

Figures

Figure 1.	The BeagleBone CANBus Cape	11
Figure 2.	Key Components.....	14
Figure 3.	BeagleBone CANBus Cape High Level Block Diagram	16
Figure 4.	CAN Transceiver Circuit	17
Figure 5.	UART Selection Circuit.....	18
Figure 6.	BeagleBone CANBus Cape EEPROM.....	19
Figure 7.	BeagleBone CANBus Cape Dimensions Drawing	20

Tables

Table 1.	Change History	10
Table 2.	BeagleBone CANBus Cape Features.....	13



NOTES



1.0 Introduction

This document is the System Reference Manual for the BeagleBone CANBus Cape, an add-on board for the BeagleBone.

This document is intended as a guide to assist anyone purchasing or who are considering purchasing the board to understand the overall design and usage of the BeagleBone CANBus Cape from the system level perspective.

The design is subject to change without notice as we will work to keep improving the design as the product matures.

The key sections in this document are:

[Section 2.0 – Change History](#)

Provides tracking for the changes made to the System Reference Manual.

[Section 3.0 – Overview](#)

This is a high level overview of the BeagleBone CANBus Cape.

[Section 4.0 – Features and Specification](#)

Provided here are the features and electrical specifications of the board.

[Section 5.0 – System Architecture and Design](#)

This section provides information on the overall architecture and design of the BeagleBone CANBus Cape. This is a very detailed section that goes into the design of each circuit on the board.

[Section 6.0 – Mechanical](#)

Information is provided here on the dimensions of the BeagleBone CANBus Cape.

[Section 7.0 – Design Materials](#)

This section provides information on where to get the design files.

2.0 Change History

2.1 Change History

Table 1 tracks the changes made for each revision of this document.

Table 1. Change History

Rev	Changes	Date	By
A1	Initial release.	09/28/2012	BBT



3.0 BeagleBone CANBus Cape Overview

3.1 Descriptions

The BeagleBone CANBus Cape makes use of DCAN1 interface of the AM335x processor to provide a Controller Area Network (CAN) interface that meets the specifications of ISO11898. The CAN Bus interface can be accessed via a standard D-Sub 9 female serial connector. This connector is located to the side so it doesn't interfere with any capes stacked above it. The BeagleBone CANBus Cape also supports SocketCAN.

Figure 1 below is a picture of the board.

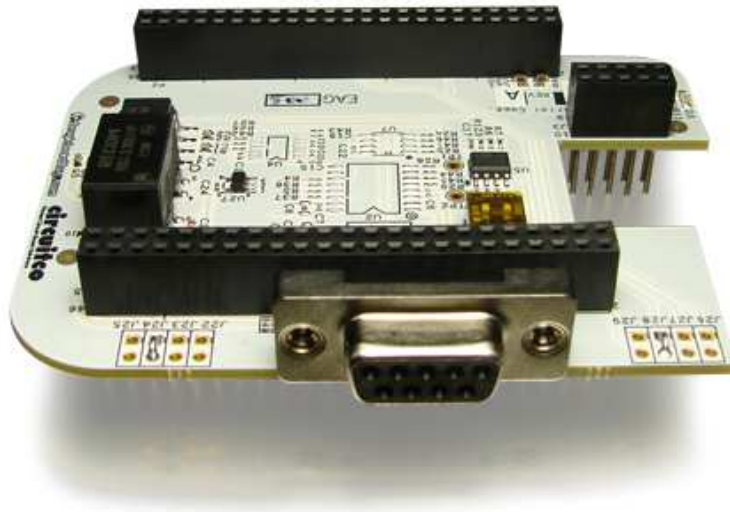


Figure 1. The BeagleBone CANBus Cape

3.2 In The Box

The final packaged BeagleBone CANBus Cape product will contain the following items:

- 1 BeagleBone CANBus Cape

3.3 Repairs

If you feel the board is in need of repair, follow the RMA Request process found at <http://www.beagleboardtoys.com/support/rma>

Do not send the board in for repair until an RMA authorization has been provided.

Do not return the board to the distributor unless you want to get a refund. You must get authorization from the distributor before returning the board.

4.0 Features and Specifications

This section covers the specifications of the BeagleBone CANBus Cape and provides a high level description of the major components and interfaces that make up the board.

Table 2 provides a list of the BeagleBone CANBus Cape's features.

Table 2. BeagleBone CANBus Cape Features

Compatible Serial Port	UART1
Power	3.3 V via expansion header
Indicator	Power LED
Connector	Two 46-position connectors
	One 10-position connector
	One D-Sub9 serial connector

4.1 Key Component Locations

Figure 2 shows the location of the key components on the board.

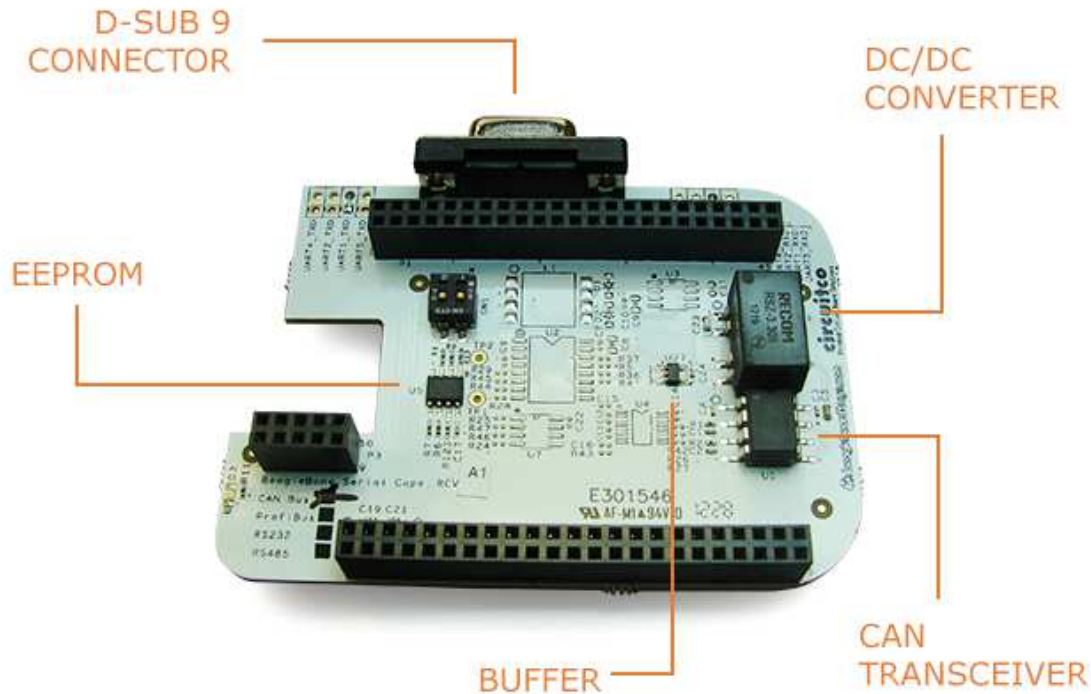


Figure 2. Key Components

4.2 CAN Bus Interface

The BeagleBone CANBus Cape uses an RSZ-3.305HP to provide isolated power sources for the CAN transceiver ISO1050. ISO1050 is a galvanically isolated CAN transceiver that isolates grounds and prevents noise currents from entering local ground. The bus side of the transceiver is connected to a D-Sub 9 connector and provides an option to install a terminal resistor. The controller side of the transceiver is connected to DCAN1 port of AM335x on BeagleBone.

4.3 Power Indicator

The BeagleBone CANBus Cape features an LED (D3) to indicate that power is applied to the cape. This LED is green when lit.

4.4 Mechanical Specifications

Size:	4.00" x 2.50"
Layers:	4
PCB thickness:	.062"
RoHS Compliant:	Yes

4.5 Electrical Specifications

Table 3 is the electrical specification of the external interfaces to the BeagleBone CANBus panel.

Table 3. BeagleBone CANBus Electrical Specifications

Specification	Min	Typ	Max	Unit
Power				
Input Voltage DC		3.3		V
Environmental				
Temperature range	0		+85	C



5.0 System Architecture and Design

This section provides a high level description of the design of the BeagleBone CANBus Cape and its overall architecture.

5.1 System Block Diagram

Figure 3 is the high level block diagram of the BeagleBone CANBus Cape.

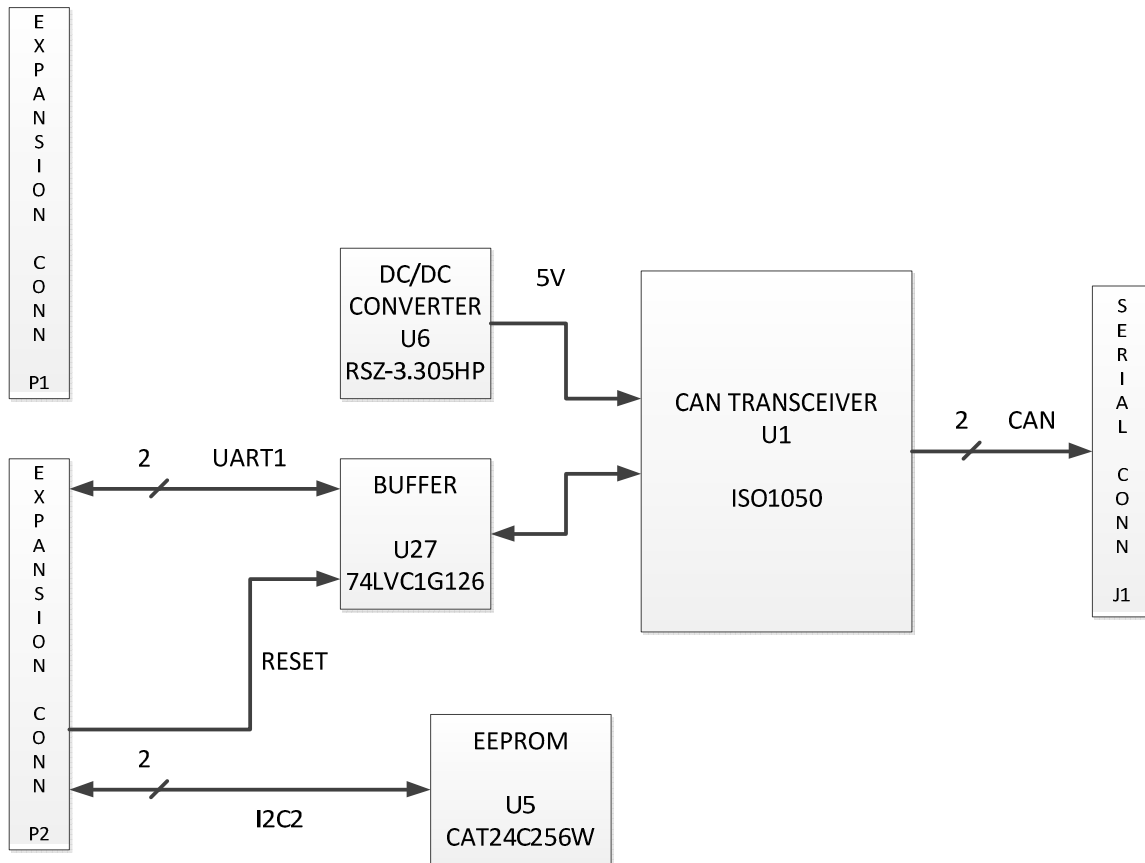


Figure 3. BeagleBone CANBus Cape High Level Block Diagram

5.2 CAN Transceiver

ISO1050 is a galvanically isolated CAN transceiver. The input and output buffers are isolated by a silicon oxide insulation barrier that provides galvanic isolation of up to 2500 V_{RMS} . The device is powered by 3.3V supply that comes from the expansion connectors. It also has an isolated secondary power source of 5V. The bus side is connected to bus signals; therefore, 5V is required to provide a high signal-to-noise ratio. The controller

side is connected to UART port of AM335X; these signals are required to be at 3.3V voltage level.

The CANBus Cape provides an option to install a terminal resistor for CAN bus signals. The CAN High and CAN Low signals are connected to pin 7 and pin 2 of D-Sub connector J1. The ground signal for CAN is isolated and connected to pin 3 of J1. **Figure 4** shows the transceiver circuit on the CANBus Cape.

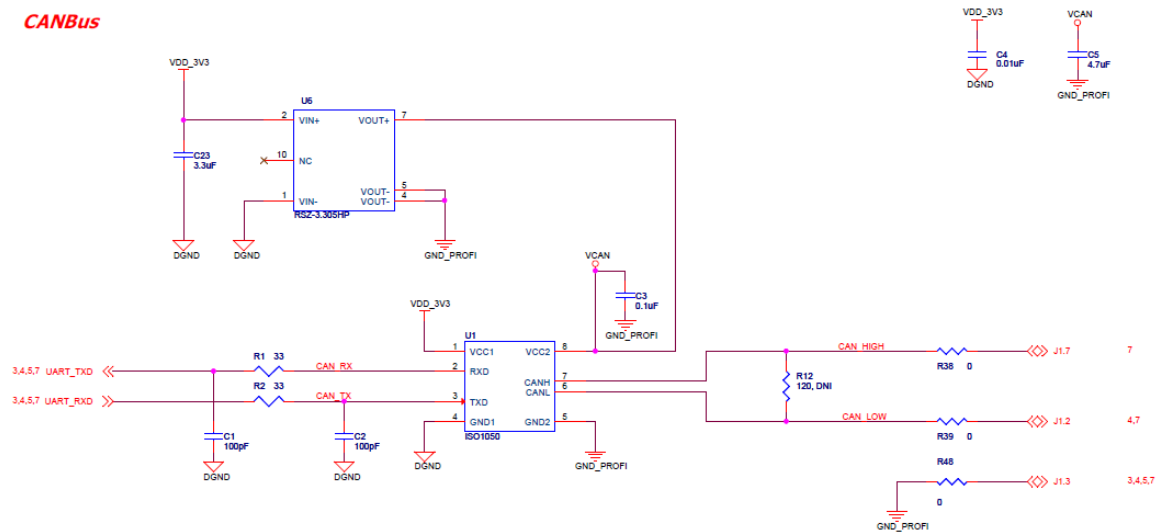


Figure 4. CAN Transceiver Circuit

5.3 Isolated Power and Ground

The CANBus Cape uses an isolated DC-DC converter RSZ-3.305HP to convert 3.3V to 5.0V for the CAN transceiver. RSZ-3.305HP features a transformer driver, an isolation transformer, a rectifier network as well as a linear regulator. The supply and ground leads on the input and output sides are isolated. This isolation prevents noise currents from entering local ground and damage sensitive circuitry.

5.4 Controller Signals

The controller side of the ISO1050 is connected to UART1 port of AM335X, which can also be pin-muxed as DCAN1. A noise filter is applied between the transceiver and the controller.

As of this revision, the BeagleBone CANBus Cape uses the same printed circuit board (PCB) as other serial capes; therefore, the controller signals RX and TX are connected to a UART selection circuit where user can select which UART port is used. However, since only UART1 port supports DCAN1, the jumpers of other UART ports are removed on the CANBus Cape and the RXD and TXD jumpers of UART1 are hard-wired. **Figure 5** shows the UART selection circuit on the CANBus Cape.

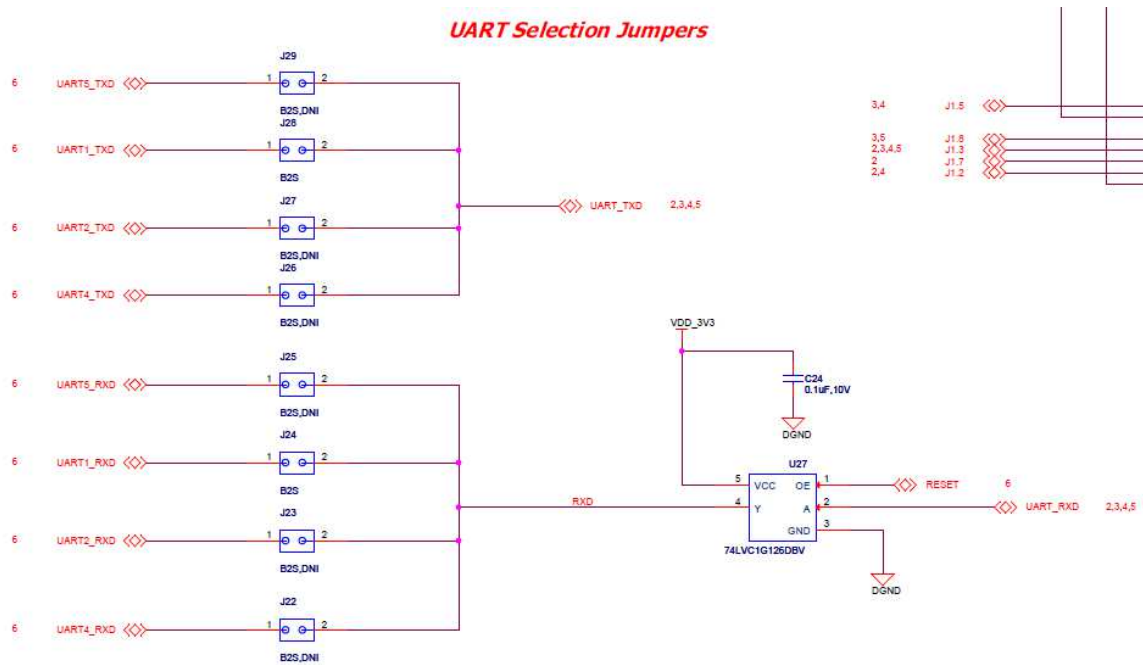


Figure 5. UART Selection Circuit

5.5 EEPROM

The BeagleBone CANBus Cape has an EEPROM containing information that will allow the SW to identify the board and to configure the expansion headers pins as needed. EEPROMs are required for all Capes sold in order for them to operate correctly when plugged in the BeagleBone.

The EEPROM used on this cape is the same one as is used on the BeagleBone, a CAT24C256. The CAT24C256 is a 256 kb Serial CMOS EEPROM, internally organized as 32,768 words of 8 bits each. It features a 64-byte page write buffer and supports the Standard (100 kHz), Fast (400 kHz) and Fast-Plus (1 MHz) I2C protocol. **Figure 6** is the design of the EEPROM circuit.

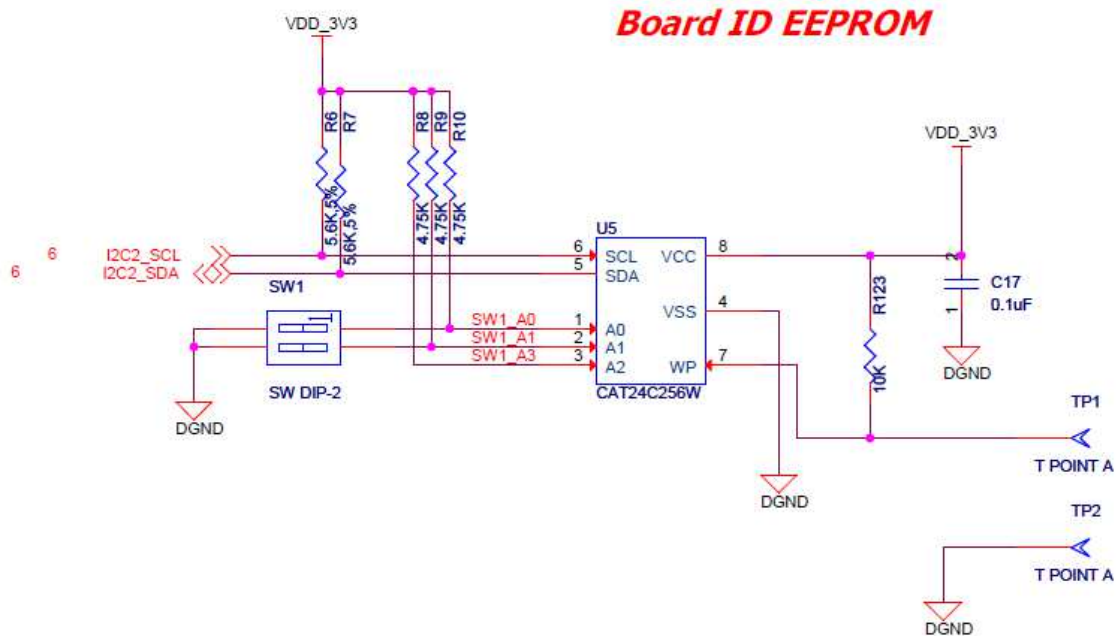


Figure 6. BeagleBone CANBus Cape EEPROM

5.5.1 EEPROM Address

In order for each Cape to have a unique address, a board ID scheme is used that sets the address to be different depending on the order in which it is stacked onto the main board. A two position dipswitch or jumpers is used to set the address pins of the EEPROM. It is the responsibility of user to set the proper address for each board. Address line A2 is always tied high. This sets the allowable address range for the expansion cards to 0x54 to 0x57. All other I2C addresses can be used by the user in the design of their Capes. But, these addresses must not be used other than for the board EEPROM information.

5.5.2 I2C Bus

The EEPROMs on each expansion board is connected to I2C2. For this reason I2C2 must always be left connected and should not be changed by SW to remove it from the expansion header pin mux. The I2C signals require pull-up resistors. Each board must have a 5.6K resistor on these signals. With four resistors this will be an effective resistance of 1.4K if all Capes were installed.

6.0 Mechanical Information

This section provides information on the mechanical aspect of the BeagleBone CANBus Cape. **Figure 7** is the dimensions of the BeagleBone CANBus Cape.

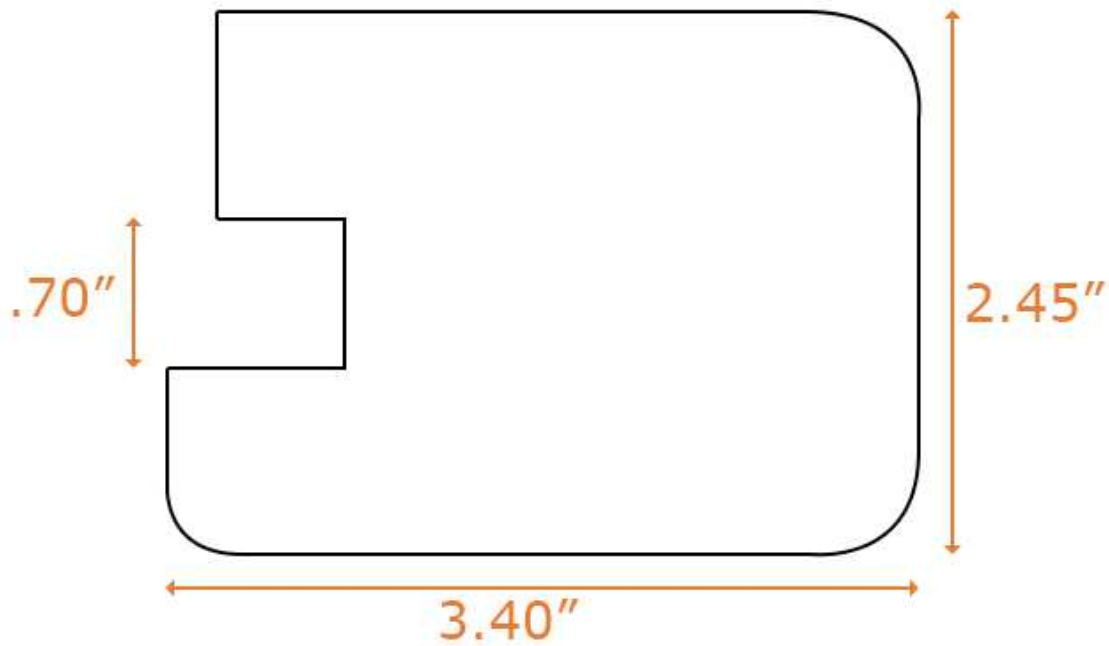


Figure 7. BeagleBone CANBus Cape Dimensions Drawing



7.0 Design Materials

Design information can be found at BeagleBoardToys wiki:

http://beagleboardtoys.com/wiki/index.php?title=BeagleBone_CANBus

Provided there is:

- Schematic in PDF
- Schematic in OrCAD
- Manufacturing files
 - o PCB Gerber
 - o PCB Layout (Allegro)
- Bill of Materials
- System Reference Manual (This document)

*These design materials are ***NOT SUPPORTED*** and **DO NOT** constitute a reference design. Only “community” support is allowed via resources at BeagleBoard.org/discuss. THERE IS NO WARRANTY FOR THE DESIGN MATERIALS, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE DESIGN MATERIALS “AS IS” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE DESIGN MATERIALS IS WITH YOU. SHOULD THE DESIGN MATERIALS PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.*

We mean it, these design materials may be totally unsuitable for any purposes.