*REVIEW DRAFT - CISCO CONFIDENTIAL*



# Deploy a Threat Defense Virtual Cluster on Azure


About Threat Defense Virtual Clustering on Azure 2

Licenses for Threat Defense Virtual Clustering 4

Requirements and Prerequisites for Threat Defense Virtual Clustering 4

Guidelines for Threat Defense Virtual Clustering 5

Deploy the Cluster in Azure 6

Threat Defense Virtual Clustering Autoscale Solution on Azure 25

Add the Cluster to the Management Center (Manual Deployment) 47

Configure Cluster Health Monitor Settings 54

Manage Cluster Nodes 58

Monitoring the Cluster 61

Troubleshooting the Cluster 66

Upgrading the Cluster 68

Reference for Clustering 68

History for Threat Defense Virtual Clustering on Azure 78

**Revised: March 27, 2025**

Clustering lets you group multiple Threat Defense Virtuals together as a single logical device. A cluster provides all the convenience of a single device (management, integration into a network) while achieving the increased throughput and redundancy of multiple devices.

Currently, only routed firewall mode is supported.

**Note** Some features are not supported when using clustering. See.

# About Threat Defense Virtual Clustering on Azure

This section describes the clustering architecture and how it works.

## How the Cluster Fits into Your Network

The cluster consists of multiple firewalls acting as a single device. To act as a cluster, the firewalls need the following infrastructure:

- Isolated network for intra-cluster communication, known as the *cluster control link*, using VXLAN interfaces. VXLANs, which act as Layer 2 virtual networks over Layer 3 physical networks, let the Threat Defense Virtual send broadcast/multicast messages over the cluster control link.
- Load Balancer(s)—For external load balancing, you have the following options:
  - Azure Gateway Load Balancer

    In an Azure service chain, Threat Defense Virtuals act as a transparent gateway that can intercept packets between the internet and the customer service. The Threat Defense Virtual defines an external interface and an internal interface on a single NIC by utilizing VXLAN segments in a paired proxy.
  - Equal-Cost Multi-Path Routing (ECMP) using inside and outside routers such as Cisco Cloud Services Router

    ECMP routing can forward packets over multiple “best paths” that tie for top place in the routing metric. Like EtherChannel, a hash of source and destination IP addresses and/or source and destination ports can be used to send a packet to one of the next hops. If you use static routes for ECMP routing, then the Threat Defense failure can cause problems; the route continues to be used, and traffic to the failed Threat Defense will be lost. If you use static routes, be sure to use a static route monitoring feature such as Object Tracking. We recommend using dynamic routing protocols to add and remove routes, in which case, you must configure each Threat Defense to participate in dynamic routing.

**Note** Layer 2 Spanned EtherChannels are not supported for load balancing.

## Individual Interfaces

You can configure cluster interfaces as *Individual interfaces*.

Individual interfaces are normal routed interfaces, each with their own local IP address. The IP address for the interface will be configured automatically via DHCP. Static IP configuration is not supported.

## Control and Data Node Roles

All nodes in the cluster share the same configuration. The node that you initially specify as the control node will overwrite the configuration on the data nodes when they join the cluster, so you only need to perform initial configuration on the control node before you form the cluster.

Some features do not scale in a cluster, and the control node handles all traffic for those features.

## Cluster Control Link

Each node must dedicate one interface as a VXLAN (VTEP) interface for the cluster control link.

#### VXLAN Tunnel Endpoint

VXLAN tunnel endpoint (VTEP) devices perform VXLAN encapsulation and decapsulation. Each VTEP has two interface types: one or more virtual interfaces called VXLAN Network Identifier (VNI) interfaces, and a regular interface called the VTEP source interface that tunnels the VNI interfaces between VTEPs. The VTEP source interface is attached to the transport IP network for VTEP-to-VTEP communication.

#### VTEP Source Interface

The VTEP source interface is a regular threat defense virtual interface with which you plan to associate the VNI interface. You can configure one VTEP source interface to act as the cluster control link. The source interface is reserved for cluster control link use only. Each VTEP source interface has an IP address on the same subnet. This subnet should be isolated from all other traffic, and should include only the cluster control link interfaces.

#### VNI Interface

A VNI interface is similar to a VLAN interface: it is a virtual interface that keeps network traffic separated on a given physical interface by using tagging. You can only configure one VNI interface. Each VNI interface has an IP address on the same subnet.

#### Peer VTEPs

Unlike regular VXLAN for data interfaces, which allows a single VTEP peer, The threat defense virtual clustering allows you to configure multiple peers.

### Cluster Control Link Traffic Overview

Cluster control link traffic includes both control and data traffic.

Control traffic includes:

- Control node election.
- Configuration replication.
- Health monitoring.

Data traffic includes:

- State replication.
- Connection ownership queries and data packet forwarding.

### Configuration Replication

All nodes in the cluster share a single configuration. You can only make configuration changes on the control node (with the exception of the bootstrap configuration), and changes are automatically synced to all other nodes in the cluster.

### Management Network

You must manage each node using the Management interface; management from a data interface is not supported with clustering.

## Licenses for Threat Defense Virtual Clustering

Each threat defense virtual cluster node requires the same performance tier license. We recommend using the same number of CPUs and memory for all members, or else performance will be limited on all nodes to match the least capable member. The throughput level will be replicated from the control node to each data node so they match.

You assign feature licenses to the cluster as a whole, not to individual nodes. However, each node of the cluster consumes a separate license for each feature. The clustering feature itself does not require any licenses.

When you add the control node to the Management Center, you can specify the feature licenses you want to use for the cluster. You can modify licenses for the cluster in the **Devices** > **Device Management** > **Cluster** > **License** area.



**Note** If you add the cluster before the Management Center is licensed (and running in Evaluation mode), then when you license the Management Center, you can experience traffic disruption when you deploy policy changes to the cluster. Changing to licensed mode causes all data units to leave the cluster and then rejoin.

## Requirements and Prerequisites for Threat Defense Virtual Clustering

#### Model Requirements

- FTDv5, FTDv10, FTDv20, FTDv30, FTDv50, FTDv100



**Note** FTDv5 and FTDv10 do not support Azure Gateway Load Balancer.

- Maximum 16 nodes

See also the general requirements for the Threat Defense Virtual in the Cisco Secure Firewall Threat Defense Virtual Getting Started Guide.

#### User Roles

- Admin
- Access Admin
- Network Admin

### Hardware and Software Requirements

All units in a cluster:

- Must be in the same performance tier. We recommend using the same number of CPUs and memory for all nodes, or else peformance will be limited on all nodes to match the least capable node.
- The Management Center access must be from the Management interface; data interface management is not supported.
- Must run the identical software except at the time of an image upgrade. Hitless upgrade is supported.
- Cluster control link interfaces of all units must be in the same subnet.

### MTU

Make sure the ports connected to the cluster control link have the correct (higher) MTU configured. If there is an MTU mismatch, the cluster formation will fail. The cluster control link MTU should be 154 bytes higher than the data interfaces. Because the cluster control link traffic includes data packet forwarding, the cluster control link needs to accommodate the entire size of a data packet plus cluster traffic overhead (100 bytes) plus VXLAN overhead (54 bytes).

**Note** The MTU value cannot be modified for the cluster control link (CCL) MTU.

For Azure with GWLB, the data interface uses VXLAN encapsulation. In this case, the entire Ethernet datagram is being encapsulated, so the new packet is larger and requires a larger MTU. You should set the cluster control link MTU to be the source interface MTU + 80 bytes.

The following table shows the default values for the cluster control link MTU and the data interface MTU.

***Table 1: Default MTU***

| Public Cloud | Cluster Control Link MTU | Data Interface MTU |
|---|---|---|
| Azure with GWLB | 1454 | 1374 |
| Azure | 1454 | 1300 |

## Guidelines for Threat Defense Virtual Clustering

### High Availability

High Availability is not supported with clustering.

### IPv6

The cluster control link is only supported using IPv4.

### Additional Guidelines

- When significant topology changes occur (such as adding or removing an EtherChannel interface, enabling or disabling an interface on the Threat Defense or the switch, adding an additional switch to form a VSS or VNet) you should disable the health

check feature and also disable interface monitoring for the disabled interfaces. When the topology change is complete, and the configuration change is synced to all units, you can re-enable the interface health check feature.

- When adding a node to an existing cluster, or when reloading a node, there will be a temporary, limited packet/connection drop; this is expected behavior. In some cases, the dropped packets can hang your connection; for example, dropping a FIN/ACK packet for an FTP connection will make the FTP client hang. In this case, you need to reestablish the FTP connection.
- Do not power off a node without first disabling clustering on the node.
- For decrypted TLS/SSL connections, the decryption states are not synchronized, and if the connection owner fails, then decrypted connections will be reset. New connections will need to be established to a new node. Connections that are not decrypted (they match a do-not-decrypt rule) are not affected and are replicated correctly.
- Dynamic scaling is not supported.
- Perform a global deployment after the completion of each maintenance window.
- Ensure that you do not remove more than one device at a time from the scale set (Azure). We also recommend that you run the **cluster disable** command on the device before removing the device from the scale set (Azure).
- If you want to disable data nodes and the control node in a cluster, we recommend that you disable the data nodes before disabling the control node. If a control node is disabled while there are other data nodes in the cluster, one of the data nodes has to be promoted to be the control node. Note that the role change could disturb the cluster.
- In the customized day 0 configuration scripts given in this guide, you can change the IP addresses as per your requirement, provide custom interface names, and change the sequence of the CCL-Link interface.
- If you experience CCL instability issues, such as intermittent ping failures, after deploying a Threat Defense Virtual cluster on a cloud platform, we recommend that you address the reasons that are causing CCL instability. Also, you can increase the hold time as a temporary workaround to mitigate CCL instability issues to a certain extent. For more information on how to change the hold time, see Edit Cluster Health Monitor Settings.

### Defaults for Clustering

- The cLACP system ID is auto-generated, and the system priority is 1 by default.
- The cluster health check feature is enabled by default with the holdtime of 3 seconds. Interface health monitoring is enabled on all interfaces by default.
- The cluster auto-rejoin feature for a failed cluster control link is unlimited attempts every 5 minutes.
- The cluster auto-rejoin feature for a failed data interface is 3 attempts every 5 minutes, with the increasing interval set to 2.
- Connection replication delay of 5 seconds is enabled by default for HTTP traffic.

# Deploy the Cluster in Azure

You can use the cluster with the Azure Gateway Load Balancer (GWLB), or with a non-native load-balancer. To deploy a cluster in Azure, use Azure Resource Manager (ARM) templates to deploy a Virtual Machine Scale Set.

## Sample Topology for GWLB-based Cluster Deployment

*Figure 1: Inbound Traffic Use Case and Topology with GWLB*


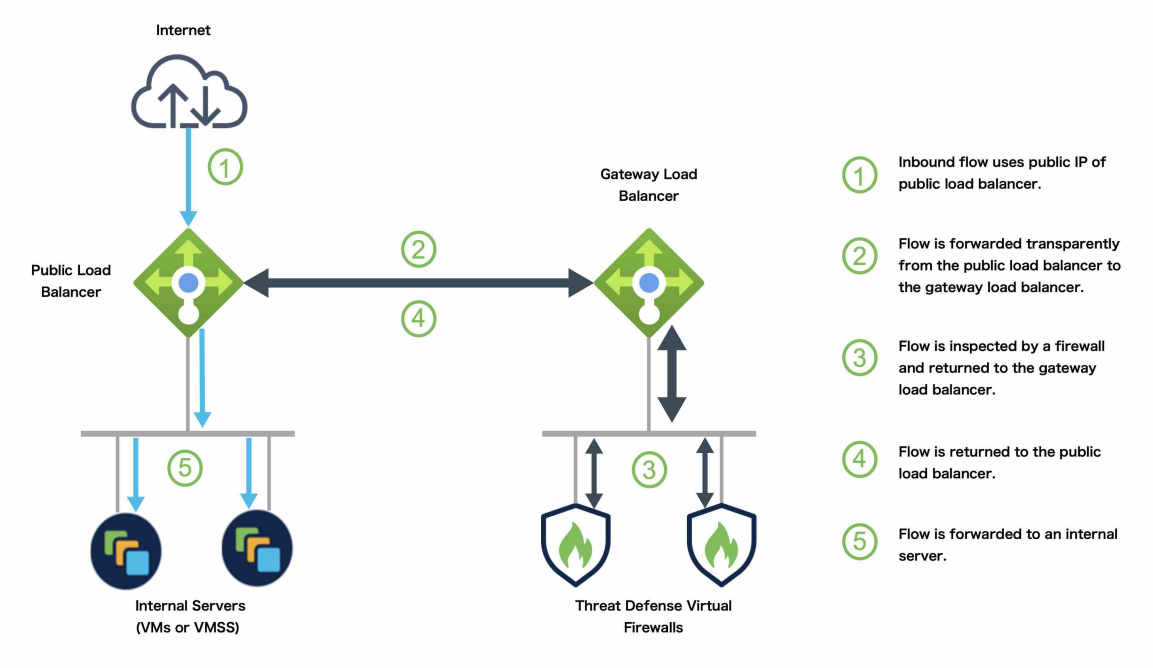



*Figure 2: Outbound Traffic Use Case and Topology with GWLB*

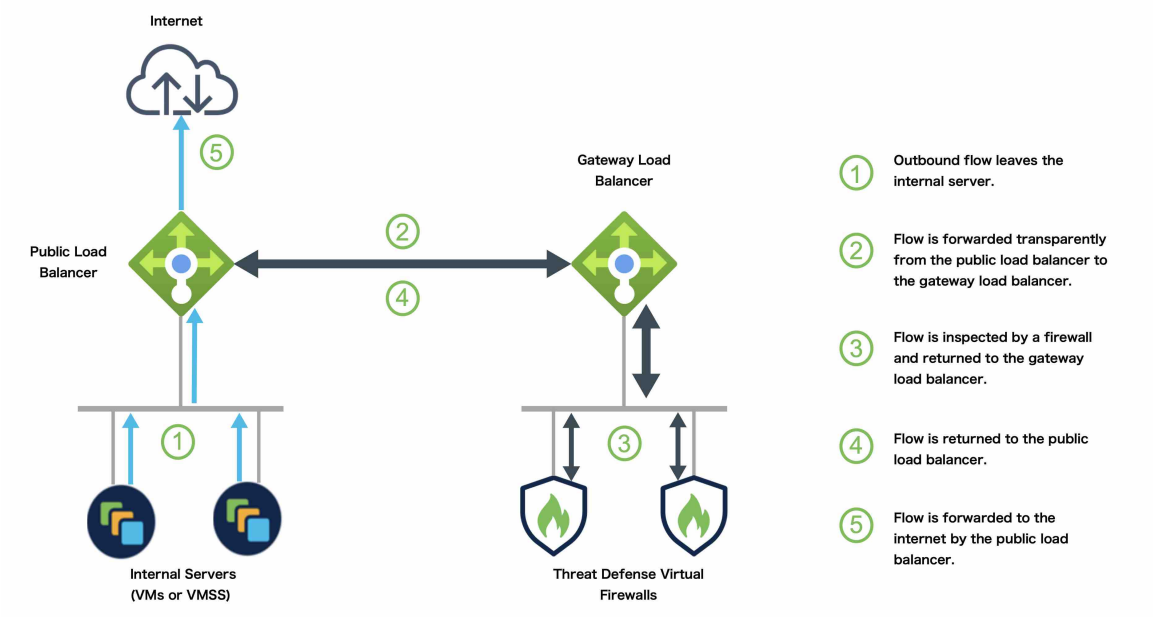


## Azure Gateway Load Balancer and Paired Proxy

In an Azure service chain, Threat Defense Virtuals act as a transparent gateway that can intercept packets between the internet and the customer service. The Threat Defense Virtual defines an external interface and an internal interface on a single NIC by utilizing VXLAN segments in a paired proxy.

The following figure shows traffic forwarded to the Azure Gateway Load Balancer from the Public Gateway Load Balancer on the external VXLAN segment. The Gateway Load Balancer balances traffic among multiple Threat Defense Virtuals, which inspect the traffic before either dropping it or sending it back to the Gateway Load Balancer on the internal VXLAN segment. The Azure Gateway Load Balancer then sends the traffic back to the Public Gateway Load Balancer and to the destination.

***Figure 3: Azure Gateway Load Balancer with Paired Proxy***

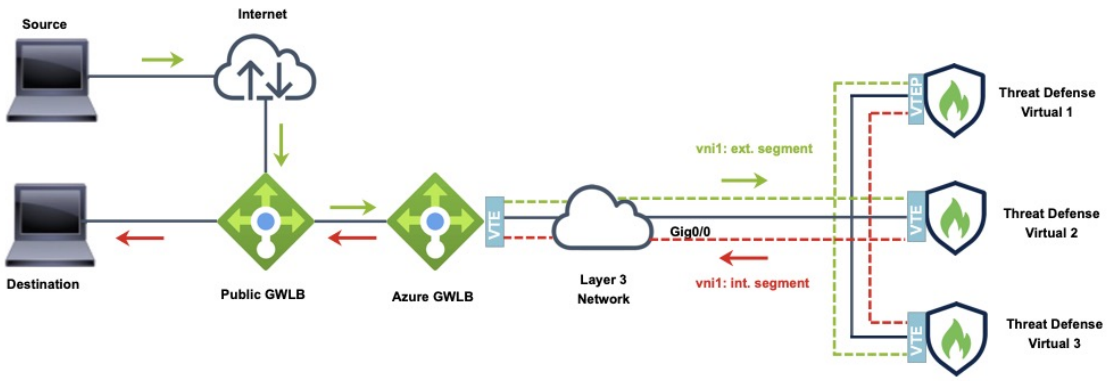



**Traffic flow between GWLBe to GWLB (Geneve Single-Arm Proxy) in Azure**

## End-to-End Process for Deploying Threat Defense Virtual Cluster in Azure with GWLB

### Template-based Deployment


The following flowchart illustrates the workflow for template-based deployment of the Threat Defense Virtual cluster in Azure with GWLB.

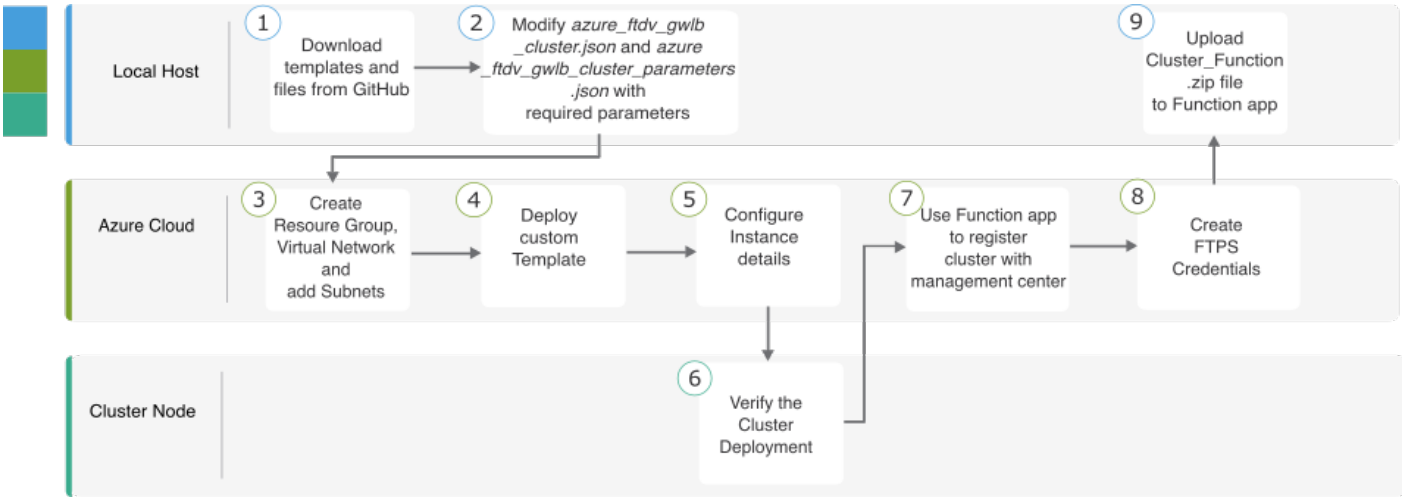

| | Workspace | Steps |
|---|---|---|
| 1 | Local Host | Download templates and files from GitHub. |
| 2 | Local Host | Modify *azure_ftdv_gwlb_cluster.json* and *azure_ftdv_gwlb_cluster_parameters.json* with the required parameters. |
| 3 | Azure Cloud | Create the resource group, virtual network, and subnets. |
| 4 | Azure Cloud | Deploy custom template. |
| 5 | Azure Cloud | Configure instance details. |
| 6 | Cluster Node | Verify cluster deployment. |
| 7 | Azure Cloud | Use the Function app to register the cluster with the Management Center. |
| 8 | Azure Cloud | Create FTPS credentials. |
| 9 | Local Host | Upload *Cluster_Function.zip* file to the Function app. |

**Manual Deployment**

The following flowchart illustrates the workflow of manual deployment of Threat Defense Virtual cluster in Azure with GWLB.

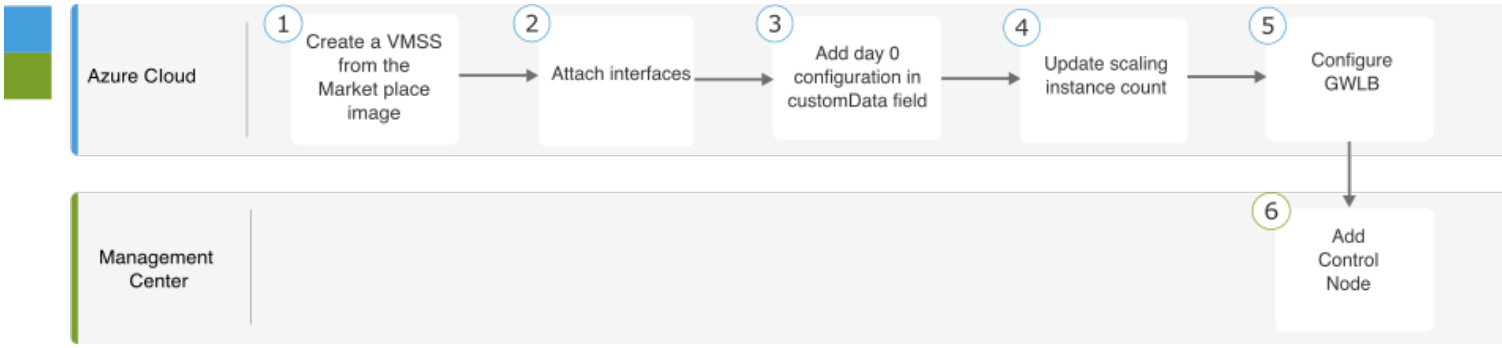


| | Workspace | Steps |
|---|---|---|
| 1 | Local Host | Create a VMSS from the Marketplace image. |
| 2 | Local Host | Attach interfaces. |
| 3 | Local Host | Add day 0 configuration in the customData field. |
| 4 | Local Host | Update scaling instance count. |

| | Workspace | Steps |
|---|---|---|
| 5 | Local Host | Configure GWLB. |
| 6 | Management Center | Add control node. |

## Templates

The templates given below are available in GitHub. The parameter values are self-explanatory with the parameter names, and values, given in the template.

From Secure Firewall version 7.4.1, you can deploy the cluster without the diagnostic interface. To deploy the cluster with only the Outside, Inside, Management, and CCL interfaces, use the withoutDiagnostic templates - azure_withoutDiagnostic_ftdv_gwlb_cluster_parameters.json and azure_withoutDiagnostic_ftdv_gwlb_cluster.json files.

Templates to deploy **with Diagnostic** Interface:

- azure_ftdv_gwlb_cluster_parameters.json – Template to enter parameters for the Threat Defense Virtual cluster with GWLB.
- azure_ftdv_gwlb_cluster.json – Template to deploy Threat Defense Virtual cluster with GWLB.

Templates to deploy **without Diagnostic** Interface:

- azure_withoutDiagnostic_ftdv_gwlb_cluster_parameters.json – Template to enter parameters for the Threat Defense Virtual cluster with GWLB deployment without Diagnostic interface.
- azure_withoutDiagnostic_ftdv_gwlb_cluster.json – Template to deploy Threat Defense Virtual cluster with GWLB without Diagnostic interface.

## Prerequisites

- To allow the cluster to auto-register to the management center, create a user with Network Admin & Maintenance User privileges on the management center. Users with these privileges can use REST API. See the Cisco Secure Firewall Management Center Administration Guide.
- Add an access policy in the management center that matches the name of the policy that you will specify during template deployment.
- Ensure that the Management Center Virtual is licensed appropriately.
- Perform the steps given below after the cluster is added to the Management Center Virtual:
  1. Configure platform settings with the health check port number in the Management Center. For more information on configuring this, see Platform Settings.
  2. Create a static route for data traffic. For more information on creating a static route, see Add a Static Route.

     Sample static route configuration:

```
Network: any-ipv4
Interface: vxlan_tunnel
Leaked from Virtual Router: Global
Gateway: vxlan_tunnel_gw
Tunneled: false
Metric: 2
```

**Note** *vxlan_tunnel_gw* is the data subnet's gateway IP address.

## Deploy Cluster on Azure with GWLB Using an Azure Resource Manager Template

Deploy the Virtual Machine Scale Set for Azure GWLB using the customized Azure Resource Manager (ARM) template.

### Procedure

**Step 1** Prepare the template.

a) Clone the github repository to your local folder. See https://github.com/CiscoDevNet/cisco-ftdv/tree/master/cluster/azure.

b) Modify *azure_ftdv_gwlb_cluster.json* and *azure_ftdv_gwlb_cluster_parameters.json* with the required parameters.

OR

Modify withoutDiagnostic templates, *azure_withoutDiagnostic_ftdv_gwlb_cluster_parameters.json* and *azure_withoutDiagnostic_ftdv_gwlb_cluster.json*, with the required parameter for deploying cluster without the diagnostic interface.

**Step 2** Log into the Azure Portal: https://portal.azure.com.

**Step 3** Create a Resource Group.

a) In the **Basics** tab, choose the **Subscription** and **Resource Group** from the drop-down lists.

b) Choose the required **Region**.

**Step 4** Create a virtual network with 4 subnets: Management, Diagnostic, Outside, and Cluster Control Link (CCL).

From Secure Firewall version 7.4.1, you can deploy the cluster without the diagnostic interface. To deploy the cluster with only the Outside, Inside, Management, and CCL interfaces, use the withoutDiagnostic templates - azure_withoutDiagnostic_ftdv_gwlb_cluster_parameters.json and azure_withoutDiagnostic_ftdv_gwlb_cluster.json files.

a) Create the virtual network.

1. In the **Basics** tab, choose the **Subscription** and **Resource Group** from the drop-down lists.
2. Choose the required **Region**. Click **Next: IP addresses**.

In the **IP Addresses** tab, click **Add subnet** and add the following subnets – Management, Diagnostic, Data, and Cluster Control Link.

If you are deploying the Threat Defense Virtual 7.4.1 cluster without a Diagnostic interface, then you must skip the Diagnostic subnet creation.

b) Add the subnets.

**Step 5** Deploy the custom template.

a) Click **Create** > **Template deployment (deploy using custom templates)**.

b) Click **Build your own template in the editor**.

c) Click **Load File**, and upload **azure_ftdv_gwlb_cluster.json** or **azure_withoutDiagnostic_ftdv_gwlb_cluster.json**, if you have opted for without diagnostic interface deployment.

d) Click **Save**.

**Step 6** Configure the Instance details.

a) Enter the required values and then click **Review + create**.

b) Click **Create** after the validation is passed.

**Step 7** After the instance is running, verify the cluster deployment by logging into any one of the nodes and entering the **show cluster info** command.

***Figure 4: show cluster info***

```
> show cluster info
Cluster gwlb-cluster-template-with-AN: On
    Interface mode: individual
Cluster Member Limit : 16
    This is "12" in state CONTROL_NODE
        ID        : 0
        Version   : 99.19(1)180
        Serial No.: 9AKGFV8VH4G
        CCL IP    : 10.1.1.12
        CCL MAC   : 000d.3a55.5470
        Module    : NGFWv
        Resource  : 8 cores / 28160 MB RAM
        Last join : 11:13:24 UTC Sep 5 2022
        Last leave: N/A
```

**Step 8** In the Azure Portal, click the Function app to register the cluster with the Management Center.

**Note**
If you do not want to use the Function app, you can alternatively register the control node to the management center directly by using **Add** > **Device** (not **Add** > **Cluster**). The rest of the cluster nodes will register automatically.

**Step 9** Create FTPS Credentials by clicking **Deployment Center** > **FTPS credentials** > **User scope** > **Configure Username and Password**, and then click **Save**.

**Step 10** Upload the Cluster_Function.zip file to the Function app by executing the following **curl** command in the local terminal.

**curl -X POST -u** *username* **--data-binary @"Cluster_Function.zip" https://** *Function_App_Name***.scm.azurewebsites.net/api/zipdeploy**

**Note**
The **curl** command might take few minutes (~2 to 3 minutes) to complete command execution.

The function will be uploaded to the Function app. The function will start, and you can see the logs in the storage account's outqueue. The device registration with the Management Center will be initiated.

***Figure 5: Functions***

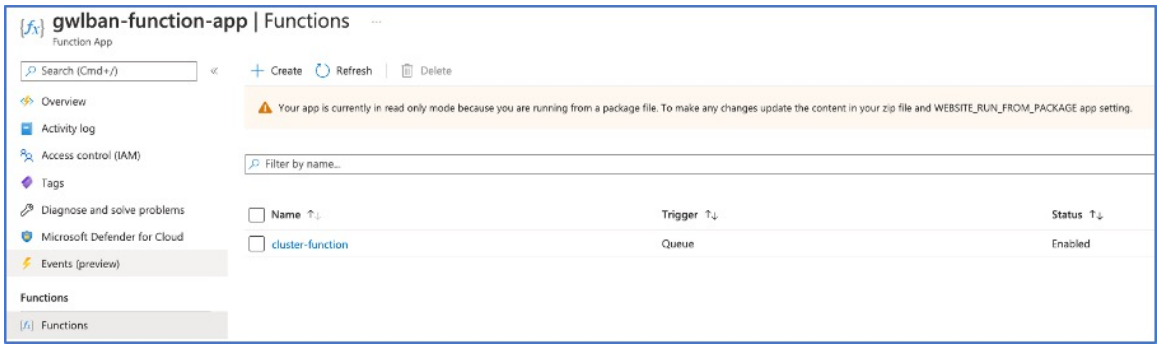


***Figure 6: Queues***



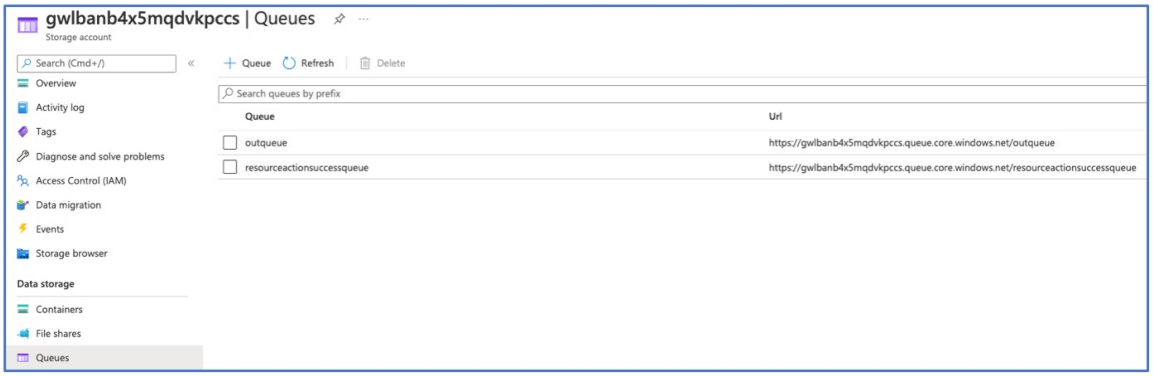



***Figure 7: Outqueue***

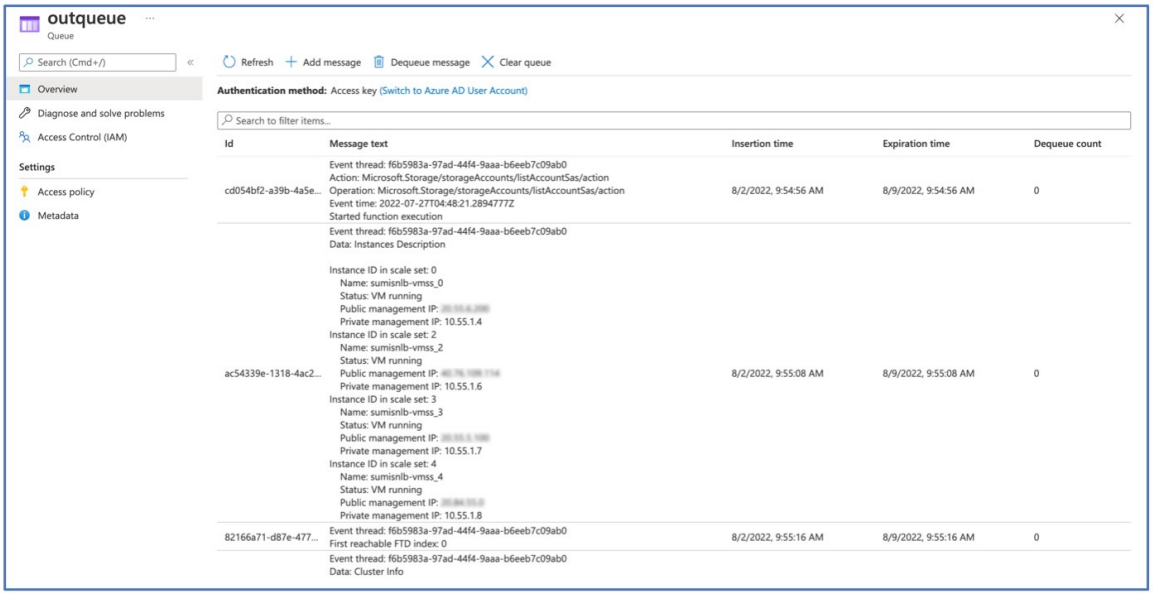

## Sample Topology for NLB-based Cluster Deployment

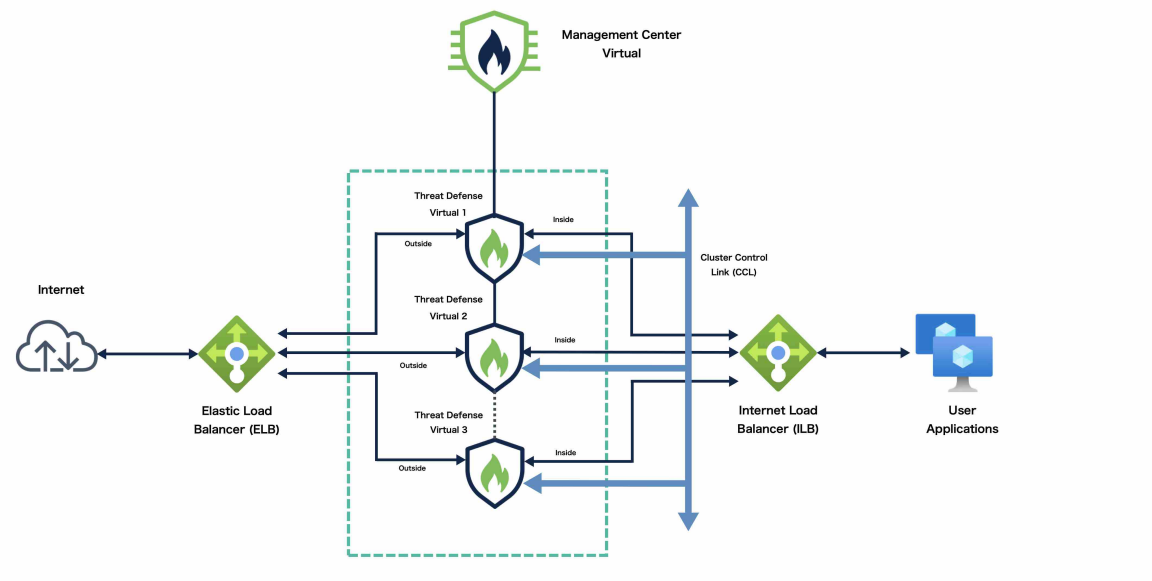


This topology depicts both inbound and outbound traffic flow. The Threat Defense Virtual cluster is sandwiched between the internal and external load balancers. A Management Center Virtual instance is used to manage the cluster.


Inbound traffic from the internet goes to the external load balancer which then transmits the traffic to the Threat Defense Virtual cluster. After the traffic has been inspected by a Threat Defense Virtual instance in the cluster, it is forwarded to the application VM.

Outbound traffic from the application VM is transmitted to the internal load balancer. Traffic is then forwarded to the Threat Defense Virtual cluster and then sent out to the internet.

## End-to-End Process for Deploying Threat Defense Virtual Cluster in Azure with NLB

**Template-based Deployment**


The following flowchart illustrates the workflow of template-based deployment of Threat Defense Virtual cluster in Azure with NLB.

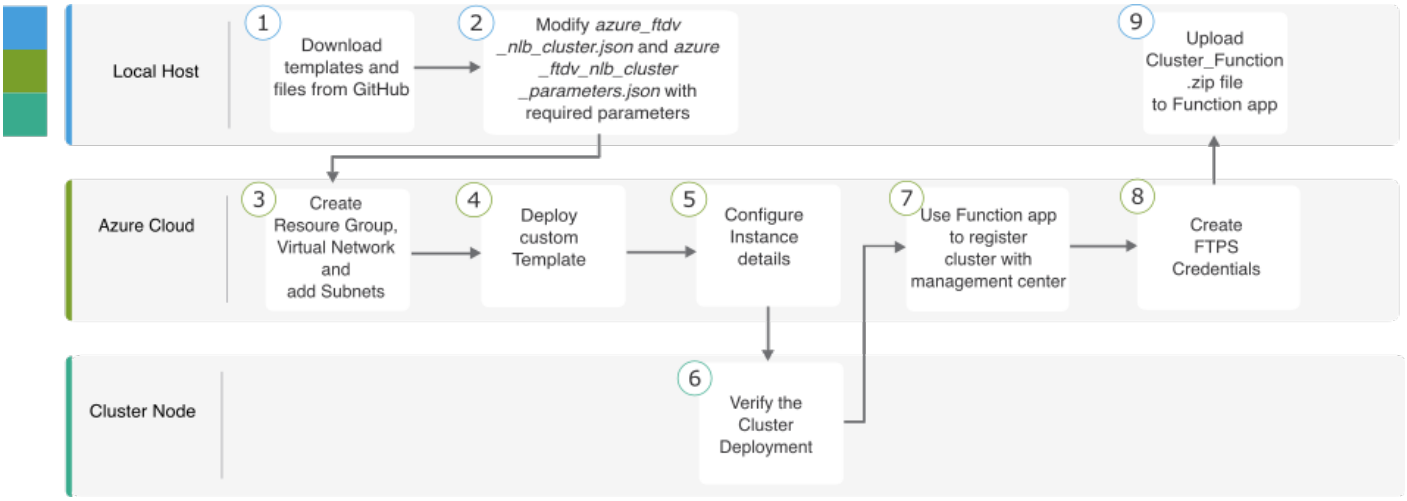

| | Workspace | Steps |
|---|---|---|
| 1 | Local Host | Download templates and files from GitHub. |
| 2 | Local Host | Modify *azure_ftdv_nlb_cluster.json* and *azure_ftdv_nlb_cluster_parameters.json* with the required parameters. |
| 3 | Azure Cloud | Create the resource group, virtual network, and subnets. |
| 4 | Azure Cloud | Deploy custom template. |
| 5 | Azure Cloud | Configure instance details. |
| 6 | Cluster Node | Verify cluster deployment. |
| 7 | Azure Cloud | Use the Function app to register the cluster with the Management Center. |
| 8 | Azure Cloud | Create FTPS credentials. |
| 9 | Local Host | Upload *Cluster_Function.zip* file to the Function app. |

**Manual Deployment**

The following flowchart illustrates the workflow of manual deployment of Threat Defense Virtual cluster in Azure with NLB.

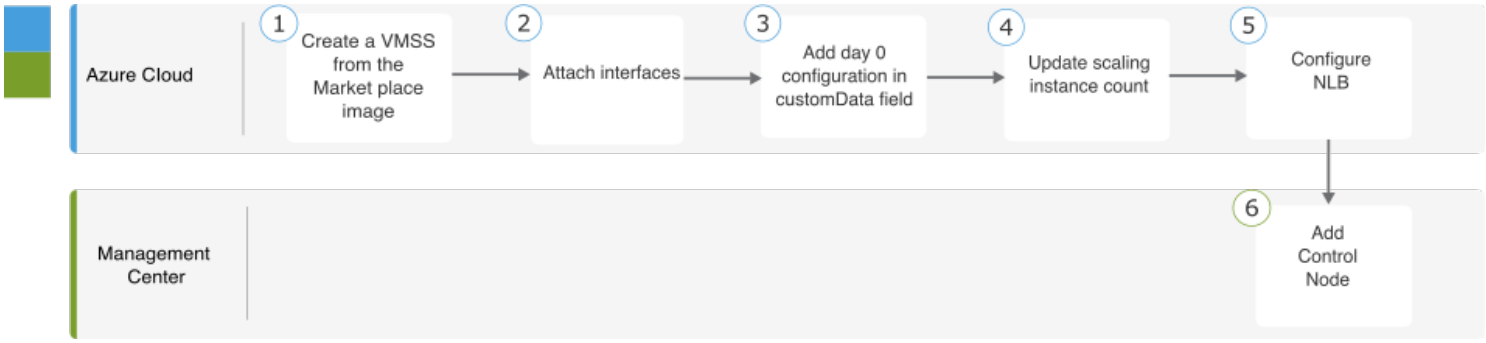


| | Workspace | Steps |
|---|---|---|
| 1 | Local Host | Create a VMSS from the Marketplace image. |
| 2 | Local Host | Attach interfaces. |
| 3 | Local Host | Add day 0 configuration in the customData field. |
| 4 | Local Host | Update scaling instance count. |

| | Workspace | Steps |
|---|---|---|
| 5 | Local Host | Configure NLB. |
| 6 | Management Center | Add control node. |

## Templates

The templates given below are available in GitHub. The parameter values are self-explanatory with the parameter names, and values, given in the template.

From Secure Firewall version 7.4.1, you can deploy the cluster without the diagnostic interface. To deploy the cluster with only the Outside, Inside, Management, and CCL interfaces, use the withoutDiagnostic templates - azure_withoutDiagnostic_ftdv_nlb_cluster_parameters.json and azure_withoutDiagnostic_ftdv_nlb_cluster.json files.

Templates to deploy **with Diagnostic** Interface:

- azure_ftdv_nlb_cluster_parameters.json – Template to enter parameters for the Threat Defense Virtual cluster with NLB.
- azure_ftdv_nlb_cluster.json – Template to deploy Threat Defense Virtual cluster with NLB.

Templates to deploy **without Diagnostic** Interface:

- azure_withoutDiagnostic_ftdv_nlb_cluster_parameters.json – Template to enter parameters for the Threat Defense Virtual cluster with NLB deployment without Diagnostic interface.
- azure_withoutDiagnostic_ftdv_nlb_cluster.json – Template to deploy Threat Defense Virtual cluster with NLB without Diagnostic interface.

## Prerequisites

- To allow the cluster to auto-register with the Management Center, create a user with Network Admin & Maintenance User privileges on the Management Center. Users with these privileges can use REST API. See the Cisco Secure Firewall Management Center Administration Guide.
- Add an access policy in the Management Center that matches the name of the policy that you will specify during template deployment.
- Ensure that the Management Center Virtual is licensed appropriately.
- After the cluster is added to the Management Center Virtual:
  1. Configure platform settings with the health check port number in the Management Center. For more information on configuring this, see Platform Settings.
  2. Create static routes for traffic from outside and inside interfaces. For more information on creating a static route, see Add a Static Route.

     Sample static route configuration for the outside interface:

```
Network: any-ipv4
Interface: outside
Leaked from Virtual Router: Global
Gateway: ftdv-cluster-outside
```

```
Tunneled: false
Metric: 10
```

**Note** *ftdv-cluster-outside* is the outside subnet's gateway IP address.

Sample static route configuration for the inside interface:

```
Network: any-ipv4
Interface: inside
Leaked from Virtual Router: Global
Gateway: ftdv-cluster-inside-gw
Tunneled: false
Metric: 11
```

**Note** *ftdv-cluster-inside-gw* is the inside subnet's gateway IP address.

3. Configure NAT rule for data traffic. For more information on configuring NAT rules, see Network Address Translation.

## Deploy Cluster on Azure with NLB Using an Azure Resource Manager Template

Deploy the cluster for Azure NLB using the customized Azure Resource Manager (ARM) template.

### Procedure

**Step 1** Prepare the template.

a) Clone the github repository to your local folder. See https://github.com/CiscoDevNet/cisco-ftdv/tree/master/cluster/azure.

b) Modify *azure_ftdv_nlb_cluster.json* and *azure_ftdv_nlb_cluster_parameters.json* with the required parameters.

Modify withoutDiagnostic templates, *azure_withoutDiagnostic_ftdv_nlb_cluster_parameters.json* and *azure_withoutDiagnostic_ftdv_nlb_cluster.json*, with the required parameter for deploying cluster without the diagnostic interface.

**Step 2** Log into the Azure Portal: https://portal.azure.com.

**Step 3** Create a Resource Group.

a) In the **Basics** tab, choose the **Subscription** and **Resource Group** from the drop-down lists.

b) Choose the required **Region**.

**Step 4** Create a virtual network with 5 subnets: Management, Diagnostic, Inside, Outside, and Cluster Control Link.

From Secure Firewall version 7.4.1, you can deploy the cluster without the diagnostic interface. To deploy the cluster with only the Outside, Inside, Management, and Cluster Control Link interfaces, use the withoutDiagnostic templates - azure_withoutDiagnostic_ftdv_nlb_cluster_parameters.json and azure_withoutDiagnostic_ftdv_nlb_cluster.json files.

a) Create the virtual network.

1. In the **Basics** tab, choose the **Subscription** and **Resource Group** from the drop-down lists.

2. b) Choose the required **Region**. Click **Next: IP addresses**.

b) Add the subnets.

In the **IP Addresses** tab, click **Add subnet** and add the following subnets – Management, Diagnostic, Inside, Outside, and Cluster Control Link.

If you are deploying the Threat Defense Virtual 7.4.1 cluster without a Diagnostic interface, then you must skip the Diagnostic subnet creation.

**Step 5** Deploy the custom template.

a) Click **Create** > **Template deployment (deploy using custom templates)**.

b) Click **Build your own template in the editor**.

c) Click **Load File**, and upload **azure_ftdv_nlb_cluster.json** or **azure_withoutDiagnostic_ftdv_nlb_cluster.json**, if you have opted for without diagnostic interface deployment.

d) Click **Save**.

**Step 6** Configure the instance details.

a) Enter the required values and then click **Review + create**.

**Note**
For the cluster control link starting and ending addresses, specify only as many addresses as you need (up to 16). A larger range can affect performance.

b) Click **Create** after the validation is passed.

**Step 7** After the instance is running, verify the cluster deployment by logging into any one of the nodes and using the **show cluster info** command.

***Figure 8: show cluster info***

```
> show cluster info
Cluster gwlb-cluster-template-with-AN: On
    Interface mode: individual
Cluster Member Limit : 16
    This is "12" in state CONTROL_NODE
        ID        : 0
        Version   : 99.19(1)180
        Serial No.: 9AKGFV8VH4G
        CCL IP    : 10.1.1.12
        CCL MAC   : 000d.3a55.5470
        Module    : NGFWv
        Resource  : 8 cores / 28160 MB RAM
        Last join : 11:13:24 UTC Sep 5 2022
        Last leave: N/A
```

**Step 8** In the Azure Portal, click the Function app to register the cluster to the management center.

**Note**
If you do not want to use the Function app, you can alternatively register the control node with the Management Center directly by using **Add** > **Device** (not **Add** > **Cluster**). The rest of the cluster nodes will register automatically.

**Step 9** Create FTPS Credentials by clicking **Deployment Center** > **FTPS credentials** > **User scope** > **Configure Username and Password**, and then click **Save**.

**Step 10** Upload the Cluster_Function.zip file to the Function app by executing the following **curl** command in the local terminal.

**curl -X POST -u** *username* **--data-binary @"Cluster_Function.zip" https://** *Function_App_Name***.scm.azurewebsites.net/api/zipdeploy**

**Note**
The **curl** command might take a few minutes (~2 to 3 minutes) to complete command execution.

The function will be uploaded to the Function app. The function will start, and you can see the logs in the storage account's outqueue. The device registration with the Management Center will be initiated.

---

# Deploy the Cluster in Azure Manually

To deploy the cluster manually, prepare the day0 configuration, deploy each node, and then add the control node to the management center.

## Create the Day0 Configuration for Azure

You can use either a fixed configuration or a customized configuration.

### Create the Day0 Configuration With a Fixed Configuration for Azure

The fixed configuration will auto-generate the cluster bootstrap configuration.

```
{
 "AdminPassword": "password",
 "FirewallMode": "Routed",
 "ManageLocally": "No",
 "Diagnostic": "OFF",    //For deployment of version 7.4.1 and later without Diagnostics template, set this
parameter to OFF.
. "FmcIp": "<FMC_IP>",
 "FmcRegKey": "<REGISTRATION_KEY>",
 "FmcNatId": "<NAT_ID>",
 "Cluster": {
  "CclSubnetRange": "ip_address_start ip_address_end",
  "ClusterGroupName": "cluster_name",
  "HealthProbePort": "port_number",
  "GatewayLoadBalancerIP": "ip_address",
  "EncapsulationType": "vxlan",
  "InternalPort": "internal_port_number",
  "ExternalPort": "external_port_number",
  "InternalSegId": "internal_segment_id",
  "ExternalSegId": "external_segment_id"
 }
}
```

### Example

A sample day 0 configuration is given below.

```
{
 "AdminPassword": "password",
 "FirewallMode": "routed",
 "ManageLocally": "No",
 "Diagnostic": "OFF",    //For deployment of version 7.4.1 and later without Diagnostics template, set this
parameter to OFF.
 "FmcIp":"<FMC_IP>",
 "FmcRegKey":"<REGISTRATION_KEY>",
 "FmcNatId":"<NAT_ID>",
 "Cluster": {
  "CclSubnetRange": "10.45.3.4 10.45.3.30",    //mandatory user input
```

```
  "ClusterGroupName": "ngfwv-cluster",          //mandatory user input
  "HealthProbePort": "7777",                    //mandatory user input
  "GatewayLoadBalanceIP": "10.45.2.4",          //mandatory user input
  "EncapsulationType": "vxlan",
  "InternalPort": "2000",
  "ExternalPort": "2001",
  "InternalSegId": "800",
  "ExternalSegId": "801"
 }
}
```

**Note** If you are copying and pasting the configuration given above, ensure that you remove **//mandatory user input** from the configuration

For the Azure health check settings, be sure to specify the **HealthProbePort** you set here.

For the **CclSubnetRange** variable, specify a range of IP addresses starting from x.x.x.4. Ensure that you have at least 16 available IP addresses for clustering. Some examples of start and end IP addresses are given below.

***Table 2: Examples of Start and End IP addresses***

| CIDR | Start IP Address | End IP Address |
|---|---|---|
| 10.1.1.0/27 | 10.1.1.4 | 10.1.1.30 |
| 10.1.1.32/27 | 10.1.1.36 | 10.1.1.62 |
| 10.1.1.64/27 | 10.1.1.68 | 10.1.1.94 |
| 10.1.1.96/27 | 10.1.1.100 | 10.1.1.126 |
| 10.1.1.128/27 | 10.1.1.132 | 10.1.1.158 |
| 10.1.1.160/27 | 10.1.1.164 | 10.1.1.190 |
| 10.1.1.192/27 | 10.1.1.196 | 10.1.1.222 |
| 10.1.1.224/27 | 10.1.1.228 | 10.1.1.254 |

### Create the Day0 Configuration With a Customized Configuration for Azure

You can enter the entire cluster bootstrap configuration using commands.

```
{
 "AdminPassword": "password",
 "FirewallMode": "Routed",
 "ManageLocally": "No",
 "Diagnostic": "OFF",    //For deployment of version 7.4.1 and later without Diagnostics template, set this
parameter to OFF.
 "FmcIp": "<FMC_IP>",
 "FmcRegKey": "<REGISTRATION_KEY>",
 "FmcNatId": "<NAT_ID>",
 "Cluster": {
  "CclSubnetRange": "ip_address_start ip_address_end",
  "ClusterGroupName": "cluster_name",
  "HealthProbePort": "port_number",
  "GatewayLoadBalancerIP": "ip_address",
  "EncapsulationType": "vxlan",
  "InternalPort": "internal_port_number",
```

```
  "ExternalPort": "external_port_number",
  "InternalSegId": "internal_segment_id",
  "ExternalSegId": "external_segment_id"
 }
}
```

### Example

A sample day 0 configuration for **version 7.4 and later** is given below.

```
{
 "AdminPassword": "Sup3rnatural",
 "Hostname": "clusterftdv",
 "FirewallMode": "routed",
 "ManageLocally": "No",
 "Diagnostic": "OFF",    //For deployment of version 7.4.1 and later without Diagnostics template, set this
parameter to OFF.
 "FmcIp": "<FMC_IP>",
 "FmcRegKey": "<REGISTRATION_KEY>",
 "FmcNatId": "<NAT_ID>",
 "run_config": [
  "cluster interface-mode individual force",
  "policy-map global_policy",
  "class inspection_default",
  "no inspect h323 h225",
  "no inspect h323 ras",
  "no inspect rtsp",
  "no inspect skinny",
  "interface Management0/0",
  "management-only",
  "nameif management",
  "security-level 0",
  "ip address dhcp",
  "interface GigabitEthernet0/0",
  "no shutdown",
  "nameif vxlan_tunnel",
  "security-level 0",
  "ip address dhcp",
  "interface GigabitEthernet0/1",
  "no shutdown",
  "nve-only cluster",
  "nameif ccl_link",
  "security-level 0",
  "ip address dhcp",
  "interface vni1",
  "description Clustering Interface",
  "segment-id 1",
  "vtep-nve 1",
  "interface vni2",
  "proxy paired",
  "nameif GWLB-backend-pool",
  "internal-segment-id 800",
  "external-segment-id 801",
  "internal-port 2000",
  "external-port 2001",
  "security-level 0",
  "vtep-nve 2",
  "object network ccl#link",
  "range 10.45.3.4 10.45.3.30",                          //mandatory user input
  "object-group network cluster#group",
  "network-object object ccl#link",
  "nve 1 ",
  "encapsulation vxlan",
```

```
  "source-interface ccl_link",
  "peer-group cluster#group",
  "nve 2 ",
  "encapsulation vxlan",
  "source-interface vxlan_tunnel",
  "peer ip <GatewayLoadbalancerIP>",
  "cluster group ftdv-cluster",                          //mandatory user input
  "local-unit 1",
  "cluster-interface vni1 ip 1.1.1.1 255.255.255.0",
  "priority 1",
  "enable",
  "mtu vxlan_tunnel 1454",
  "mtu ccl_link 1454"
 ]
}
```

A sample day 0 configuration for **version 7.3 and earlier** is given below.

```
{
 "AdminPassword": "Sup3rnatural",
 "Hostname": "clusterftdv",
 "FirewallMode": "routed",
 "ManageLocally": "No",
 "FmcIp": "<FMC_IP>",
 "FmcRegKey": "<REGISTRATION_KEY>",
 "FmcNatId": "<NAT_ID>",
 "run_config": [
  "cluster interface-mode individual force",
  "policy-map global_policy",
  "class inspection_default",
  "no inspect h323 h225",
  "no inspect h323 ras",
  "no inspect rtsp",
  "no inspect skinny",
  "interface Management0/0",
  "management-only",
  "nameif management",
  "security-level 0",
  "ip address dhcp",
  "interface GigabitEthernet0/0",
  "no shutdown",
  "nameif vxlan_tunnel",
  "security-level 0",
  "ip address dhcp",
  "interface GigabitEthernet0/1",
  "no shutdown",
  "nve-only cluster",
  "nameif ccl_link",
  "security-level 0",
  "ip address dhcp",
  "interface vni1",
  "description Clustering Interface",
  "segment-id 1",
  "vtep-nve 1",
  "interface vni2",
  "proxy paired",
  "nameif GWLB-backend-pool",
  "internal-segment-id 800",
  "external-segment-id 801",
  "internal-port 2000",
  "external-port 2001",
  "security-level 0",
  "vtep-nve 2",
  "object network ccl#link",
```

```
  "range 10.45.3.4 10.45.3.30",                          //mandatory user input
  "object-group network cluster#group",
  "network-object object ccl#link",
  "nve 1 ",
  "encapsulation vxlan",
  "source-interface ccl_link",
  "peer-group cluster#group",
  "nve 2 ",
  "encapsulation vxlan",
  "source-interface vxlan_tunnel",
  "peer ip <GatewayLoadbalancerIP>",
  "cluster group ftdv-cluster",                          //mandatory user input
  "local-unit 1",
  "cluster-interface vni1 ip 1.1.1.1 255.255.255.0",
  "priority 1",
  "enable",
  "mtu vxlan_tunnel 1454",
  "mtu ccl_link 1554"
 ]
}
```

**Note** If you are copying and pasting the configuration given above, ensure that you remove **//mandatory user input** from the configuration.

## Deploy Cluster Nodes Manually - GWLB-based Deployment

Deploy the cluster nodes so they form a cluster.

### Procedure

**Step 1** Create a Virtual Machine Scale Set from the Marketplace image with 0 instance count using the **az vmss create** CLI.

**az vmss create --resource-group** <*ResourceGroupName*> **--name** <*VMSSName*> **--vm-sku** <*InstanceSize*> **--image** <*FTDvImage*> **--instance-count 0 --admin-username** <*AdminUserName*> **--admin-password** <*AdminPassword*> **--plan-name** <*ftdv-azure-byol/ftdv-azure-payg*> **--plan-publisher cisco --plan-product cisco-ftdv --plan-promotion-code** <*ftdv-azure-byol/ftdv-azure-payg*> **--vnet-name** <*VirtualNetworkName*> **--subnet** <*MgmtSubnetName*>

**Step 2** Attach three interfaces—Diagnostic, Data, and Cluster Control Link.

**Step 3** Go to the virtual machine scale set you have created and perform the following steps:

a) Under the **Operating system** section, add the day 0 configuration in the **customData** field.

b) Click **Save**.

c) Under the **Scaling** section, update the instance count with the required cluster node. You can set the instance count range of minimum 1 and maximum 16.

**Step 4** Configure the Azure Gateway Load Balancer. See Auto Scale with Azure Gateway Load Balancer Use Case for more information.

**Step 5** Add the control node to the management center. See Add the Cluster to the Management Center (Manual Deployment), on page 47.

## Deploy Cluster Nodes Manually - NLB-based Deployment

Deploy the cluster nodes so they form a cluster.

**Procedure**

**Step 1** Create a Virtual Machine Scale Set from the Marketplace image with 0 instance count using the **az vmss create** CLI.

**az vmss create --resource-group** <*ResourceGroupName*> **--name** <*VMSSName*> **--vm-sku** <*InstanceSize*> **--image** <*FTDvImage*> **--instance-count 0 --admin-username** <*AdminUserName*> **--admin-password** <*AdminPassword*> **--plan-name** <*ftdv-azure-byol/ftdv-azure-payg*> **--plan-publisher cisco --plan-product cisco-ftdv --plan-promotion-code** <*ftdv-azure-byol/ftdv-azure-payg*> **--vnet-name** <*VirtualNetworkName*> **--subnet** <*MgmtSubnetName*>

**Step 2** Attach 4 interfaces—Diagnostic, Inside, Outside, and Cluster Control Link.

**Step 3** Go to the virtual machine scale set you have created and perform the following:

a) Under the **Operating system** section, add the day0 configuration in the **customData** field.
b) Click **Save**.
c) Under the **Scaling** section, update the instance count with the required cluster node. You can set the instance count range of minimum 1 and maximum 16.

**Step 4** Add the control node to the Management Center. See Add the Cluster to the Management Center (Manual Deployment), on page 47.

## Troubleshooting Cluster Deployment in Azure

- Issue: No traffic flow

  Troubleshooting:

  - Check if the health probe status of the Threat Defense Virtual instances deployed with a GWLB is healthy.
  - If the Threat Defense Virtual instance's health probe status is unhealthy-
    - Check if the static route is configured in the Management Center Virtual.
    - Check if the default gateway is the data subnet's gateway IP.
    - Check if the Threat Defense Virtual instance is receiving health probe traffic.
    - Check if the access list configured in the Management Center Virtual allows health probe traffic.

- Issue: Cluster is not formed

  Troubleshooting:

  - Check the IP address of the nve-only cluster interface. Ensure that you can ping the nve-only cluster interface of other nodes.
  - Check the IP address of the nve-only cluster interfaces are part of the object group.
  - Ensure that the NVE interface is configured with the object group .
  - Ensure that the cluster interface in the cluster group has the right VNI interface. This VNI interface has the NVE with the corresponding object group.

- Ensure that the nodes are pingable from each other. Since each node has its own cluster interface IP, these should be pingable from each other.
- Check if the CCL Subnet's Start and End Address mentioned during template deployment is correct. The start address should begin with the first available IP address in the subnet. For example, if the subnet is 192.168.1.0/24. The start address should be 192.168.1.4 (the three IP addresses at the start are reserved by Azure).
- Check if the Management Center Virtual has a valid license.

- Issue: Role-related error while deploying resources again in the same resource group.

  Troubleshooting: Remove the roles given below by using the following commands on the terminal.

  Error message:

```
"error": {
"code": "RoleAssignmentUpdateNotPermitted",
"message": "Tenant ID, application ID, principal ID, and scope are not allowed to be
updated.”}
```

  - **az role assignment delete --resource-group** <*Resource Group Name*> **--role "Storage Queue Data Contributor"**
  - **az role assignment delete --resource-group** <*Resource Group Name*> **--role "Contributor"**

# Threat Defense Virtual Clustering Autoscale Solution on Azure

A typical cluster deployment in an Azure region includes a defined number of Threat Defense Virtual instances (nodes). When the Azure region traffic varies, without dynamic scaling (autoscale) of the nodes, resource utilization in such cluster arrangement may underutilise the resources or cause latency. Cisco offers an autoscale solution for Threat Defense Virtual clustering in Version 7.7 and later that supports dynamic scaling of nodes in the Azure region. It allows you to scale-in or scale-out nodes from the cluster based on the network traffic. It uses logic based on the resource utilization statistics from Azure VMSS metrics such as CPU and memory metrics to dynamically add or remove a node from a cluster.

The Threat Defense Virtual clustering with Autoscale solution in Azure supports both Network Load Balancer (NLB or Sandwich topology) and Gateway Load Balancer (GWLB). See Sample Topologies, on page 25


Cisco provides separate Azure Resource Manager (ARM) templates for deploying Threat Defense Virtual cluster with autoscale in Azure using NLB and GWLB, as well as infrastructure and configuration templates for deploying the Azure services such as Function App and Logic App.

## Sample Topologies

**Threat Defense Virtual Clustering with Autoscale in Azure using Sandwich Topology (Network Load Balancer)**

The Threat Defense Virtual clustering with autoscale in Azure using sandwich topology (NLB) use case is an automated horizontal scaling solution that positions the Threat Defense Virtual scale set sandwiched between an Azure Internal load balancer (ILB) and an Azure External load balancer (ELB).

In this topology, the Threat Defense Virtual uses only *four* interfaces: management, inside, outside, and CCL subnets.

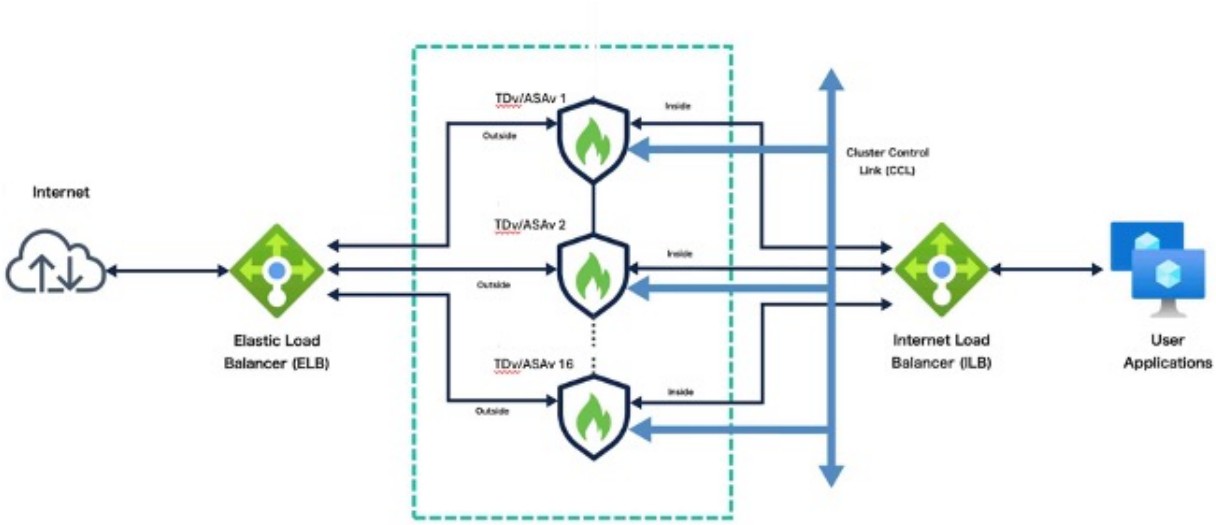


**Threat Defense Virtual Clustering with Autoscale in Azure using Sandwich Topology (NLB)**

The following describes high-level flow on how a Threat Defense Virtual cluster with autoscale in Azure using NLB functions:

- The ELB distributes traffic from the internet to the Threat Defense Virtual instances in the scale set, and then the firewall forwards traffic to the application.
- The ILB distributes outbound internet traffic from an application to Threat Defense Virtual instances in the scale set and then the firewall forwards traffic to the internet.
- A network packet will never pass through both (Internal and External) load balancers in a single connection.
- The number of Threat Defense Virtual instances in the scale set will be scaled and configured automatically based on load conditions.


**Threat Defense Virtual Clustering with Autoscale in Azure using Gateway Load Balancer**

The integration of the Azure Gateway Load Balancer (GWLB) and Threat Defense Virtual cluster using autoscale solution simplifies deployment, management, and scaling of instances in the cluster setup. The Azure Gateway Load Balancer (GWLB) ensures that internet traffic to and from an Azure VM, such as an application server, is inspected by secure firewall without requiring any routing changes. This integration also reduces operational complexity and provides a single entry and exit point for traffic at the firewall. The applications and infrastructure can maintain visibility of source IP address, which is critical in some environments.

The Threat Defense Virtual uses only *three* interfaces: management, data, and CCL interface in this use case.

**Note**

- Network Address Translation (NAT) is not required if you are deploying the Azure GWLB.
- Only IPv4 is supported.

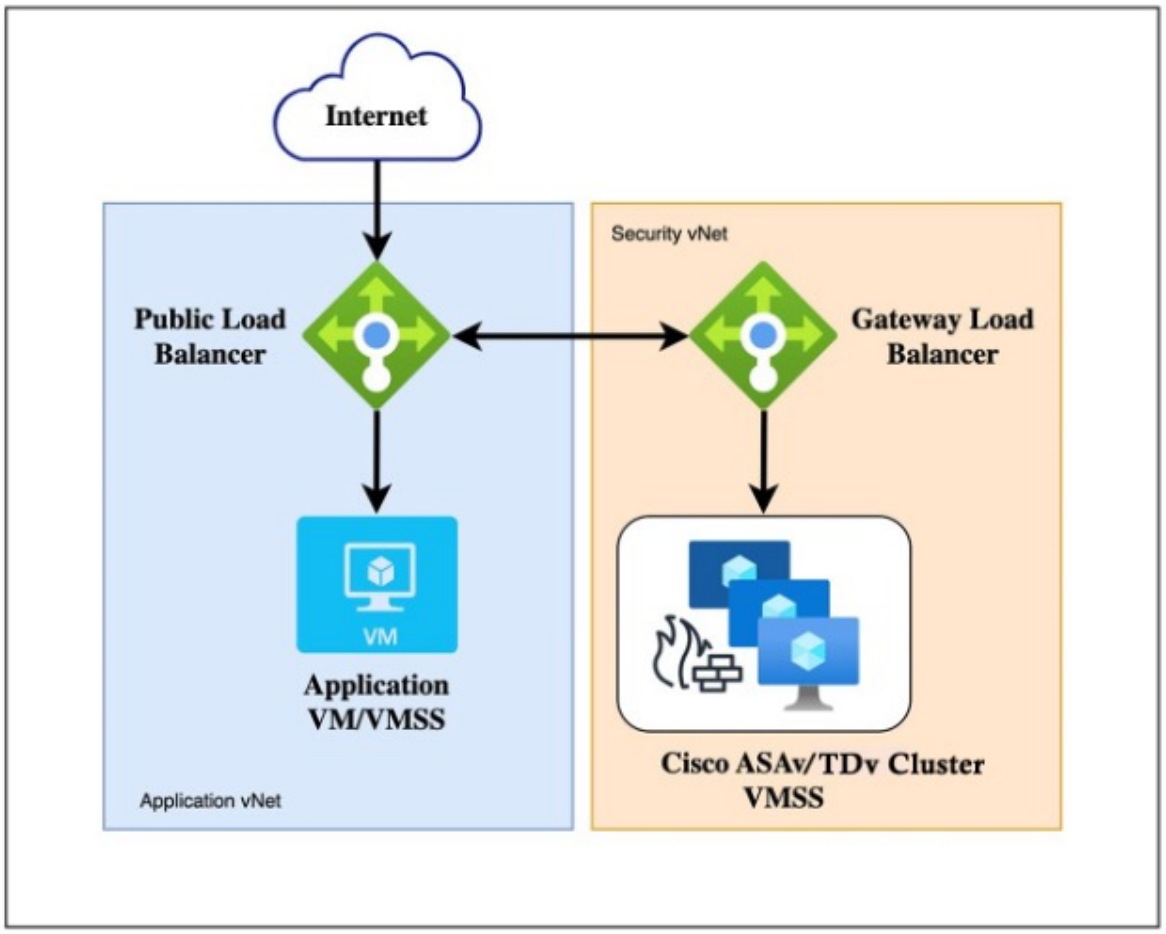


The following describes high-level flow on how a Threat Defense Virtualcluster with autoscale in Azure using GWLB functions:

- Inbound traffic from the internet goes to the GWLB endpoint, which then transmits the traffic to the GWLB.
- The traffic is then routed to the Threat Defense Virtual cluster.
- After the traffic is inspected by the Threat Defense Virtual instance in the cluster, it is forwarded to the application Application VM.

## Prerequisites

## Autoscale Logic for Threat Defense Virtual Clustering in Azure

### Scaling Policy

In a cluster with autoscale, the scaling of nodes is determined based on the following policies:

- Scaling policy 1 - When one cluster node exceeds the resource utilization limits.
- Scaling policy 2 - Overall average resource utilization of all the nodes.

**Scale-out**

Scale-out is a process of adding a new node to the cluster when the traffic load threshold exceeds the configured CPU or memory limit on any one of the cluster's node.

The following is the process of adding a new node to the cluster during scale-out:

1. A new Threat Defense Virtual instance is launched.
2. Appropriate configuration is applied to a Threat Defense Virtual.
3. Appropriate licenses are applied.
4. A new Threat Defense Virtual instance is added to the cluster.

If the configuration of the new Threat Defense Virtual instance fails (low probability) during the scale-out process, the failing instance is terminated, and a new instance is launched and configured.

**Scale-in**

Scale-in is the process of removing a node from a cluster when the configured scale-in threshold and total number of cluster instances exceed the minimum cluster size.

The following is the process of terminating a node in the cluster during scale-in:

1. The Threat Defense Virtual instance with the least CPU or memory usage is identified using VMSS metrics.
2. If there is more than one instance with the same least utilization, then the instance with the higher VM index in VMSS is chosen for scale-in.
3. Any new connections to this instance are disabled by appropriate configuration and policies.
4. The instance is de-registered from smart licensing (applicable for BYOL).
5. The instance is terminated.

### Azure Functions (Function App)

The Function application helps to enable the Threat Defense Virtual cluster and register it with the management center. The Function application also help you select a hosting plan for Threat Defense Virtual clustering with autoscale deployment.

The following two types of hosting plans are offered:

- **Consumption**
  - This is the default hosting plan for Threat Defense Virtual clustering with autoscale.
  - This plan allows the Function app to connect to the Threat Defense Virtual instances by opening the SSH port to the Azure data center IP addresses of the region.
- **Premium**
  - You can select this hosting plan for the Function app during deployment.
  - This plan supports adding a Network Address Translation (NAT) gateway to the Function app to control the outbound IP address of the Function app. This plan allows SSH access to Threat Defense Virtual instances only from a fixed IP address of the NAT gateway thereby offering enhanced security.

For more information about overview on auto scale solution components, see Auto Scale Solution Components in *Cisco Secure Firewall Threat Defense Virtual Getting Started Guide*.

## Deployment and Infrastructure Templates on GitHub

Cisco provides Azure Resource Manager (ARM) templates and scripts for deploying an auto-scaling group of Threat Defense Virtual cluster using several Azure services, including Function App, Logic App, auto-scaling groups and so on.

The autoscale solution for Threat Defense Virtual cluster is an ARM template-based deployment that provides:

- Completely automated Threat Defense Virtual instance registration and de-registration with the management center using the Function App.
- NAT policy, access control policy, and routes automatically applied to the scaled-out threat defense virtual instances.
- Support for GWLB and NLB load balancers.
- Works only with the management center; the device manager is not supported.

#### Threat Defense Virtual Clustering with Autoscale Solution Templates

**Azure Resource Manager (ARM) templates**

Two sets of templates are provided for autoscale solutions based on the (NLB or GWLB) load balancer you are using in Azure for the cluster.

The following templates are available on GitHub:

- Autoscale solution template for Threat Defense Virtual clustering using NLB: `azure_ftdv_nlb_cluster_autoscale.json` available in the folder `azure_autoscale_clustering/tdv_cluster/arm_templates/`
- Autoscale solution template for Threat Defense Virtual clustering using GWLB: `azure_ftdv_gwlb_cluster_autoscale.json` available in the folder `azure_autoscale_clustering/tdv_cluster/arm_templates/`

**Azure Infrastructure and Configuration Templates on GitHub**

The following are the templates required for setting up Azure infrastructure for clustering with autoscale on Azure.

- Function app to enable cluster on Threat Defense Virtual instances: `cluster_functions.zip` available in the folder `azure_autoscale_clustering/tdv_cluster/azure_function_app`.
- Logic App code for the Threat Defense Virtual deployment, scale-in and scale-out workflow: `logic_app.txt` available in the folder `azure_autoscale_clustering/tdv_cluster/logic_app/`.

## Input Parameters

The following table defines the template parameters and provides an example. Once you decide on these values, you can use these parameters to create the ASA virtual device when you deploy the Azure Resource Manager (ARM) template into your Azure subscription.In the clustering with autoscale soultion with GWLB for Azure, networking infrastructure is also created due to which additional input parameters have to be configured in the template. The parameter descriptions are self-explanatory.

*Table 3: Template Parameters*

| Parameter Name | Allowed Values/Type | Description | Resource Creation Type |
|---|---|---|---|
| resourceNamePrefix | String* (3-10 characters) | All the resources are created with name containing this prefix.<br>Note: Use only lowercase letters.<br>Example: ftdv | New |
| virtualNetworkRg | String | The virtual network resource group name.<br>Example: cisco-virtualnet-rg | Existing |
| virtualNetworkName | String | The virtual network name (already created).<br>Example: cisco-virtualnet | Existing |
| virtualNetworkCidr | CIDR format<br>x.x.x.x/y | CIDR of Virtual Network (already created) | Existing |
| mgmtSubnet | String | The management subnet name (already created).<br>Example: cisco-mgmt-subnet | Existing |
| dataSubnet | String | The data subnet name (already created)<br>Example: cisco-data-subnet | |
| cclSubnet | String | The cluster control link subnet name.<br>Example: cisco-ccl-subnet | |
| cclSubnetStartAddr | String | The starting range of CCL subnet IP address.<br>Example: 3.4.5.6 | |
| cclSubnetEndAddr | String | The ending range of CCL subnet IP address.<br>Example: 5.6.7.8 | |
| gwlbIP | String | GWLB is created in existing data subnet.<br>Example: 10.0.2.4 | |
| dataNetworkGatewayIp | String | The gateway IP address of the data subnet.<br>Example: 10.0.2.7 | |
| outsideSecurityZoneName | String | The security zone object Name created in the management center<br>Example: outside-sz | |

| Parameter Name | Allowed Values/Type | Description | Resource Creation Type |
|---|---|---|---|
| TDvmManagementUserName | String | TDv management administrator username.<br>You are not allowed provide 'admin' as the username. | |
| diagSubnet | String | The diagnostic subnet name (already created).<br>Example: cisco-diag-subnet | Existing |
| insideSubnet | String | The inside Subnet name (already created).<br>Example: cisco-inside-subnet | Existing |
| internalLbIp | String | The internal load balancer IP address for the inside subnet (already created).<br>Example: 1.2.3.4 | Existing |
| insideNetworkGatewayIp | String | The inside subnet gateway IP address (already created). | Existing |
| outsideSubnet | String | The outside subnet name (already created).<br>Example: cisco-outside-subnet | Existing |
| outsideNetworkGatewayIp | String | The outside subnet gateway IP (already created). | Existing |
| deviceGroupName | String | Device group in management center (already created) | Existing |
| insideZoneName | String | Inside Zone name in the management center (already created) | Existing |
| outsideZoneName | String | Outside Zone name in the management center (already created) | Existing |
| softwareVersion | String | The Threat Defense Virtual Version (selected from drop-down list during deployment). | Existing |
| vmSize | String | Size of Threat Defense Virtual instance (selected from drop-down list during deployment). | N/A |
| ftdLicensingSku | String | Threat Defense Virtual Licensing Mode (PAYG/BYOL)<br>Note: PAYG is supported in Version 6.5+. | N/A |
| licenseCapability | Comma-separated string | BASE, MALWARE, URLFilter, THREAT | N/A |

| Parameter Name | Allowed Values/Type | Description | Resource Creation Type |
|---|---|---|---|
| tdVmManagementUserName | String* | The Threat Defense Virtual VM management administrator user name.<br>This **cannot** be 'admin'. See Azure for VM administrator user name guidelines. | New |
| tdVmManagementUserPassword | String* | Password for the Threat Defense Virtual VM management administrator user.<br>Passwords must be 12 to 72 characters long, and must have: lowercase, uppercase, numbers, and special characters; and must have no more than 2 repeating characters.<br>**Note**<br>There is no compliance check for this in the template. | New |
| ftdAdminUserPassword | String | Threat Defense Virtual Admin user password.<br>**Note**<br>The criteria mentioned for the**TDvmManagementUserPassword** parameter is applicable to this parameter also. | |
| fmcIpAddress | String<br>x.x.x.x | The public IP address of the management center (already created) | Existing |
| fmcUserName | String | Management Center user name, with administrative privileges (already created) | Existing |
| fmcPassword | String | Management Center password for above management center user name (already created) | Existing |
| policyName | String | Security Policy created in the management center (already created) | Existing |
| clusterGroupName | String | The name of the cluster group to be used while registering the threat defense device to the management center.<br>Example: tdv-cluster | |
| healthCheckPortNumber | String | The health check port number used while creating the health probe in the Gateway Load balancer.<br>Example: 8080 | |

| Parameter Name | Allowed Values/Type | Description | Resource Creation Type |
|---|---|---|---|
| functionHostingPlan | String | Function deployment hosting plan (consumption uses the consumption hosting plan, premium: uses the premium hosting plan).<br>Default: consumption | |
| functionAppSubnet | String | The function app subnet name (already created).<br>Example: tdv-fapp-subnet | |
| functionAppSubnetCIDR | String | The CIDR of the function app subnet (already created).<br>Example: 10.0.4.0/24 | |
| scalingMetricsList | String | The metrics used in determining the scaling the scaling decision.<br>Allowed: CPU & MEMORY | |
| scalingPolicy | POLICY-1 / POLICY-2 | **POLICY-1**: Scale-Out will be triggered when the average load of any Threat Defense Virtual goes beyond the Scale Out threshold for the configured duration.<br>**POLICY-2**: Scale-Out will be triggered when average load of all the Threat Defense Virtual devices in the VMSS goes beyond the Scale Out threshold for the configured duration.<br>In both cases Scale-In logic remains the same: Scale-In will be triggered when average load of all the Threat Defense Virtual devices comes below the Scale In threshold for the configured duration. | N/A |
| scalingMetricsList | String | Metrics used in making the scaling decision.<br>Allowed: CPU, MEMORY<br>Default: CPU | N/A |

| Parameter Name | Allowed Values/Type | Description | Resource Creation Type |
|---|---|---|---|
| cpuScaleInThreshold | String | The scale-in threshold in percentage for CPU metrics.<br>Default: 10<br>When the Threat Defense Virtual metric goes below this value the scale-in will be triggered.<br>See Autoscale Logic for Threat Defense Virtual Clustering in Azure, on page 27 . | N/A |
| cpuScaleOutThreshold | String | The Scale-out threshold in percentage for CPU metrics.<br>Default: 80<br>When the Threat Defense Virtual metric goes above this value, the Scale-Out will be triggered.<br>The 'cpuScaleOutThreshold' should always be **greater** than the 'cpuScaleInThreshold'.<br>See Autoscale Logic for Threat Defense Virtual Clustering in Azure, on page 27. | N/A |
| memoryScaleInThreshold | String | The Scale-In threshold in percent for memory metrics.<br>Default: 0<br>When the Threat Defense Virtual metric goes below this value the Scale-In will be triggered.<br>See Autoscale Logic for Threat Defense Virtual Clustering in Azure, on page 27. | N/A |
| memoryScaleOutThreshold | String | The Scale-Out threshold in percent for memory metrics.<br>Default: 0<br>When the Threat Defense Virtual metric goes above this value, the Scale-Out will be triggered.<br>The 'memoryScaleOutThreshold´ should always be **greater** than the 'memoryScaleInThreshold'.<br>See Autoscale Logic for Threat Defense Virtual Clustering in Azure, on page 27. | N/A |

| Parameter Name | Allowed Values/Type | Description | Resource Creation Type |
|---|---|---|---|
| minFtdCount | Integer | The minimum Threat Defense Virtual instances available in the scale set at any given time.<br>Example: 2 | N/A |
| maxFtdCount | Integer | The maximum Threat Defense Virtual instances allowed in the Scale set.<br>Example: 10<br>**Note**<br>This number is restricted by the management center capacity.<br>The Auto Scale logic will not check the range of this variable, hence fill this carefully. | N/A |
| metricsAverageDuration | Integer | Select from the drop-down.<br>This number represents the time (in minutes) over which the metrics are averaged out.<br>If the value of this variable is 5 (i.e. 5min), when the Auto Scale Manager is scheduled it will check the past 5 minutes average of metrics and based on this it will make a scaling decision.<br>**Note**<br>Only numbers 1, 5, 15, and 30 are valid due to Azure limitations. | N/A |

| Parameter Name | Allowed Values/Type | Description | Resource Creation Type |
|---|---|---|---|
| initDeploymentMode | BULK / STEP | Primarily applicable for the first deployment, or when the Scale Set does not contain any Threat Defense Virtual instances.<br><br>BULK: The Auto Scale Manager will try to deploy 'minFtdCount' number of Threat Defense Virtual instances in parallel at one time.<br><br>**Note**<br>The launch is in parallel, but registering with the management center is sequential due to management center limitations.<br><br>STEP: The Auto Scale Manager will deploy the 'minFtdCount' number of Threat Defense Virtual devices one by one at each scheduled interval.<br><br>**Note**<br>The STEP option will take a long time for the ‘minFtdCount’ number of instances to be launched and configured with the management center and become operational, but useful in debugging.<br><br>The BULK option takes same amount of time to launch all ‘minFtdCount’ number of Threat Defense Virtual as one Threat Defense Virtual launch takes (because it runs in parallel), but the management center registration is sequential.<br><br>The total time to deploy ‘minFtdCount’ number of threat defense virtual = (time to launch One threat defense virtual + time to register/configure one threat defense virtual * minFtdCount ). | |
| *Azure has restrictions on the naming convention for new resources. Review the limitations or simply use all lowercase. **Do not use spaces or any other special characters**. | | | |

## Threat Defense Virtual Cluster with Autoscale Deployment Process and Resources

Threat Defense Virtual cluster with autoscale deployment process on Azure involves the following:

- Deploy the ARM template.
- Build and deploy the clustering function.

- Update and enable the Logic application.

#### Azure Resource Manager Template Deployment Resources

The following resources are created within a resource group when you deploy Threat Defense Virtual cluster with autoscale in Azure using the ARM template for **Sandwich Topology (NLB)** - `azure_ftdv_nlb_cluster_autoscale.json`

- Virtual Machine Scale Set (VMSS)
- External Load Balancer
- Internal Load Balancer
- Azure Function App
- Logic App
- Security groups (For Data and Management interfaces)

The following resources are created within a resource group when you deploy Threat Defense Virtual cluster with autoscale in Azure using the ARM template for GWLB - `azure_ftdv_gwlb_cluster_autoscale.json`

- Virtual Machine (VM) or Virtual Machine Scale Set (VMSS)
- Gateway Load Balancer (GWLB)
- Azure Function App
- Logic App
- Networking Infrastructure
- Security Groups and other miscellaneous components needed for deployment.

## Deploy the Threat Defense Virtual Cluster with Autoscale Solution

Deploy the Threat Defense Virtual clustering with autoscale solution on Azure using the ARM template. Based on the topology, Sandwich (NLB) or GWLB use case, you are required to download and configure the appropriate ARM template for deploying the Threat Defense Virtual clustering with autoscale solution on Azure.

#### Before you begin

**Download the Deployment Package from GitHub**

The Threat Defense Virtual clustering autoscale with NLB solution for Azure is an Azure Resource Manager (ARM) template-based deployment which makes use of the serverless infrastructure provided by Azure (Logic App, Azure Functions, Load Balancers, Virtual Machine Scale Set, and so on).

The Threat Defense Virtual clustering autoscale with GWLB solution for Azure is an ARM template-based deployment that creates the GWLB, networking infrastructure, threat defense virtual auto scaling group, serverless components, and other required resources.

The deployment procedures for both solutions are similar.


Download the files required to launch the Threat Defense Virtual clustering with autoscale solution for Azure.

Deployment scripts and templates for your version are available in the GitHub repository.


**Procedure**

**Step 1** Log in to the Microsoft Azure portal (https://portal.azure.com) using your Microsoft account username and password.

**Step 2** Click **Resource groups** from the menu of services to access the **Resource Groups** blade. You will see all the resource groups in your subscription listed in the blade. Create a new resource group or select an existing, empty resource group. For example, **threat defense virtual_AutoScale**.

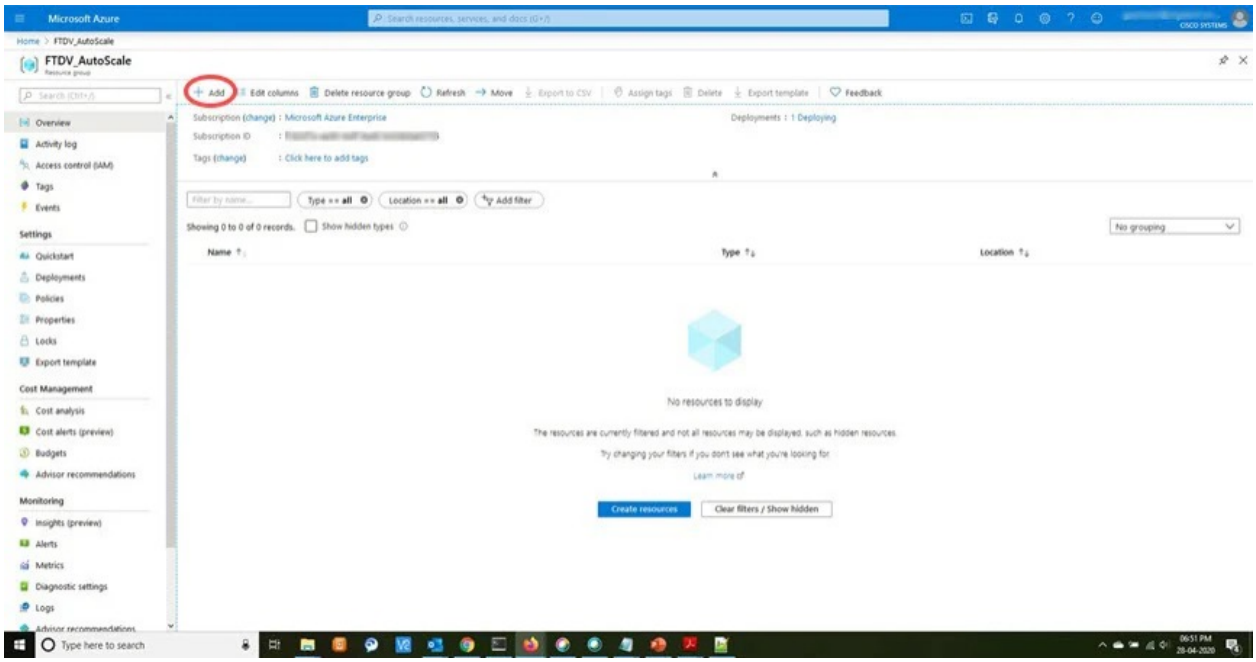



**Step 3** Click **Create a resource (+)** to create a new resource for template deployment. The **Create Resource Group** blade appears.

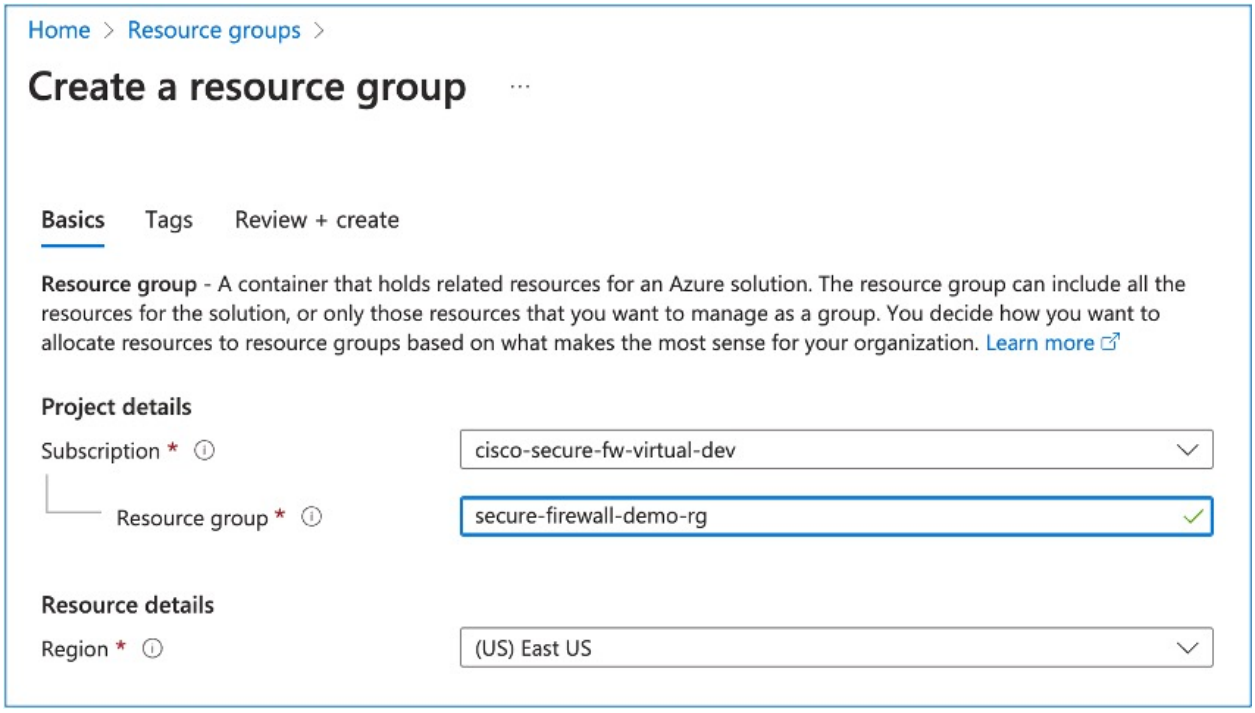



**Step 4** 4. Click **Virtual Network** from the menu of services to access the Virtual network blade. Create a virtual network with subnets.

- For GWLB deployment, create virtual network with management, data, and CCL subnets.
- For NLB deployment, create virtual network with management, inside, outside, and CCL subnets.

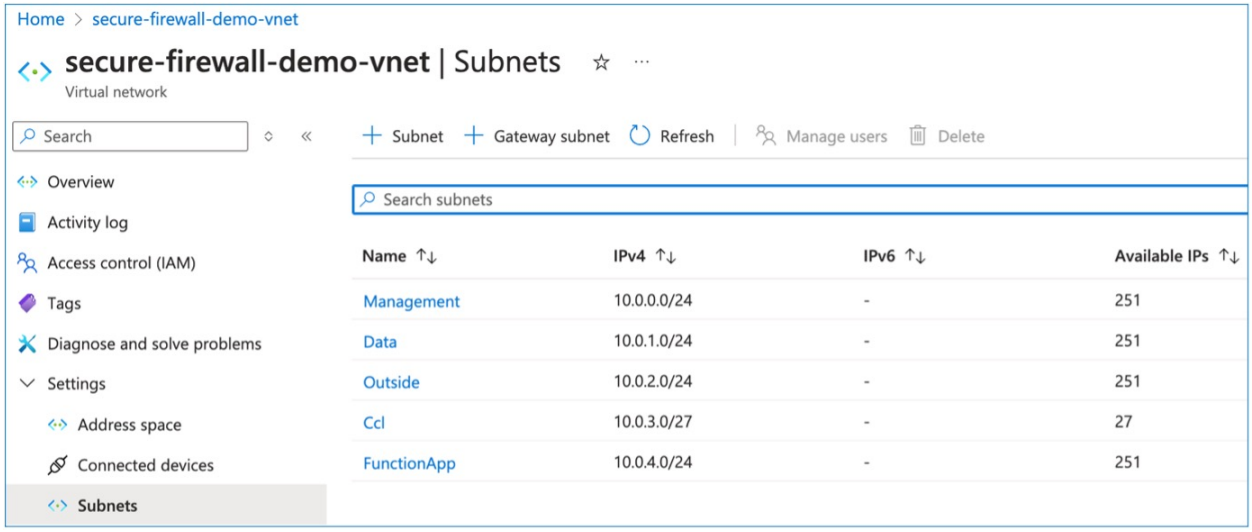



**Step 5** In **Search the Marketplace**, type **`Template deployment`** (deploy using custom templates), and then press **Enter**.

**Step 6** Click **Create**. There are several options for creating a template. Choose **Build your own template in editor**.

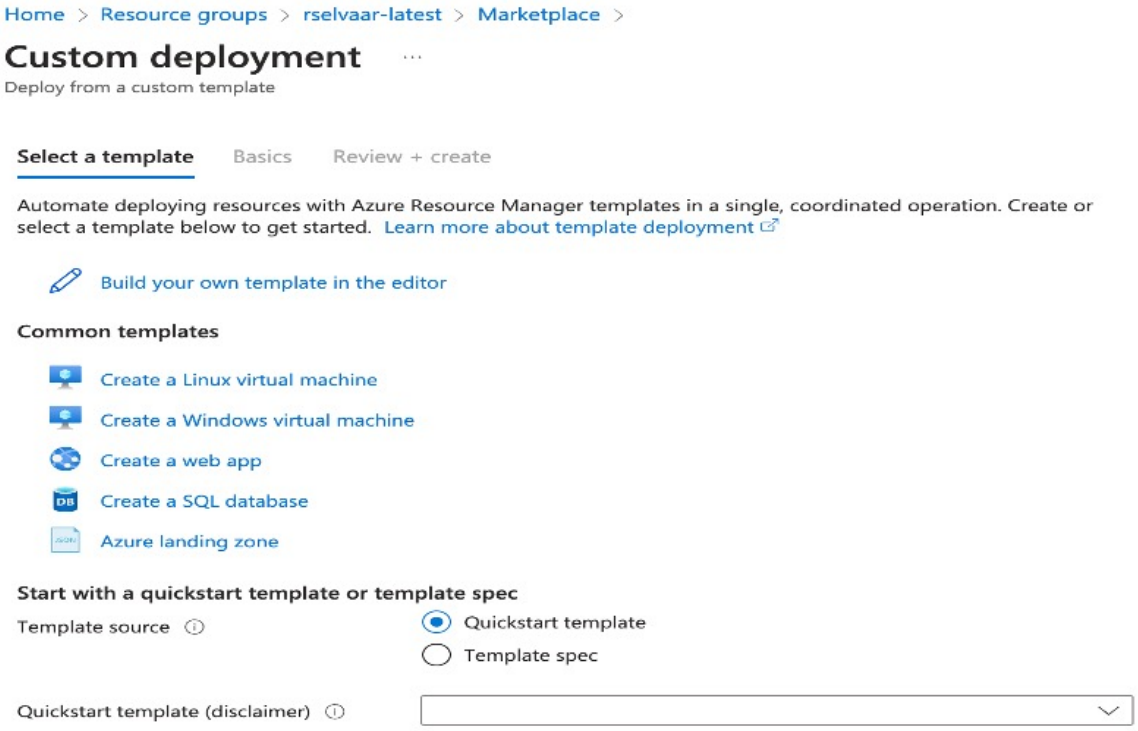


**Step 7** In the **Edit template** window, delete all the default content and copy the contents from the updated `azure_ftdv_gwlb_cluster_custom_image.json` or `azure_ftdv_nlb_cluster_custom_image.json` (depending on the type of autoscale solution you are deploying on Azure) and click **Save**. Or Click **Load file** to browse and upload this file from your computer.

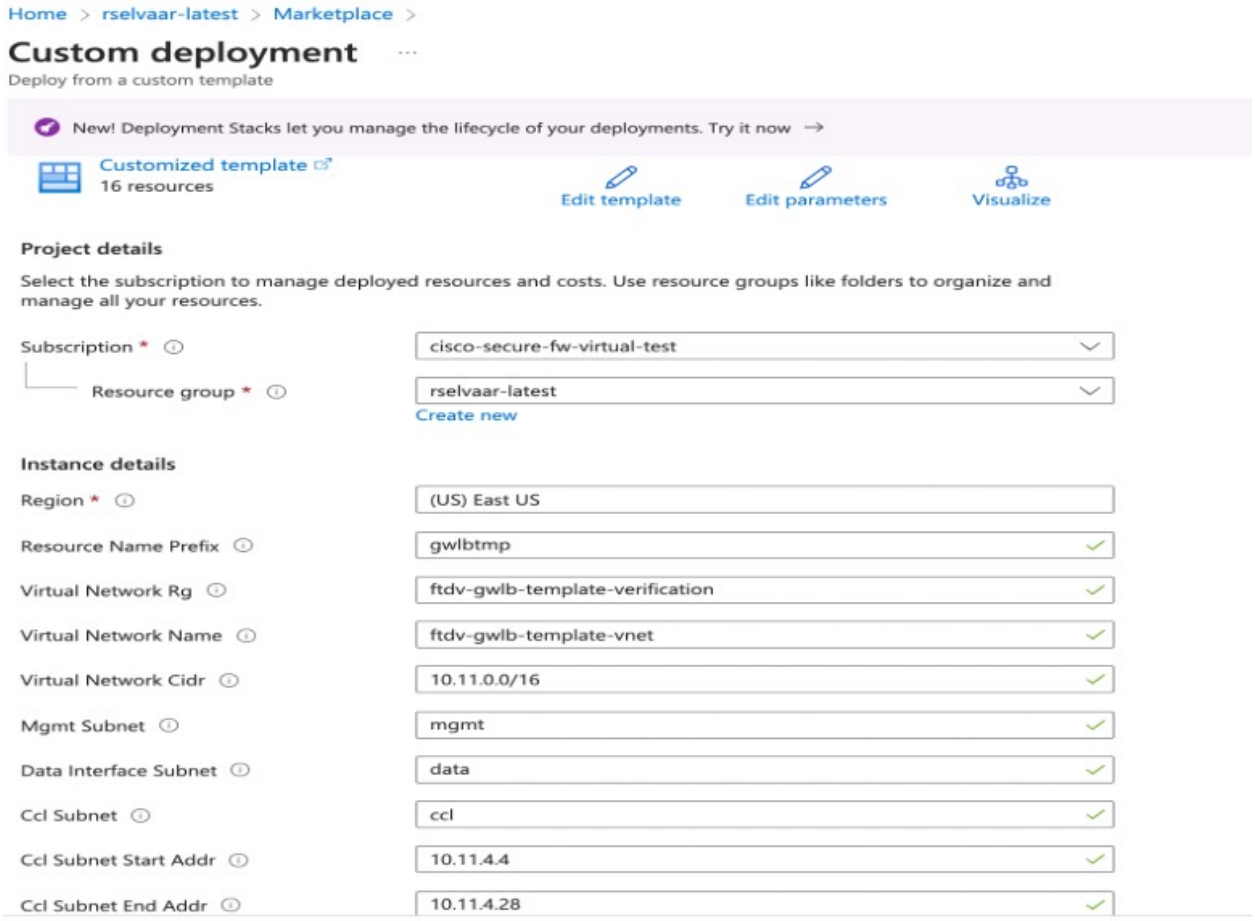

Home > rselvaar-latest > Marketplace >
Custom deployment
Deploy from a custom template
New! Deployment Stacks let you manage the lifecycle of your deployments. Try it now →
Customized template
16 resources
Edit template
Edit parameters
Visualize
Project details
Select the subscription to manage deployed resources and costs. Use resource groups like folders to organize and manage all your resources.
Subscription * cisco-secure-fw-virtual-test
Resource group * rselvaar-latest
Create new
Instance details
Region * (US) East US
Resource Name Prefix gwlbtmp
Virtual Network Rg ftdv-gwlb-template-verification
Virtual Network Name ftdv-gwlb-template-vnet
Virtual Network Cidr 10.11.0.0/16
Mgmt Subnet mgmt
Data Interface Subnet data
Ccl Subnet ccl
Ccl Subnet Start Addr 10.11.4.4
Ccl Subnet End Addr 10.11.4.28

# Custom deployment

Deploy from a custom template

New! Deployment Stacks let you manage the lifecycle of your deployments. Try it now →

| | |
|---|---|
| Function Hosting Plan | consumption |
| Function App Subnet | FunctionApp |
| Function App Subnet CIDR | 10.0.3.0/24 |
| Gateway Load Balancer IP | 10.0.1.4 |
| Data Network Gateway Ip | 10.0.1.1 |
| Outside Security Zone Name | outside |
| Image Id | /subscriptions/1fdf9165-db4d-4fc9-814b-8475c5adc637/resourceGro... |
| Vm Size | Standard_D4_v2 |
| Ftd Vm Management User Name | test |
| Ftd Vm Management User Password | •••••••••••••••• |
| Ftd Admin User Password | •••••••••••••••• |

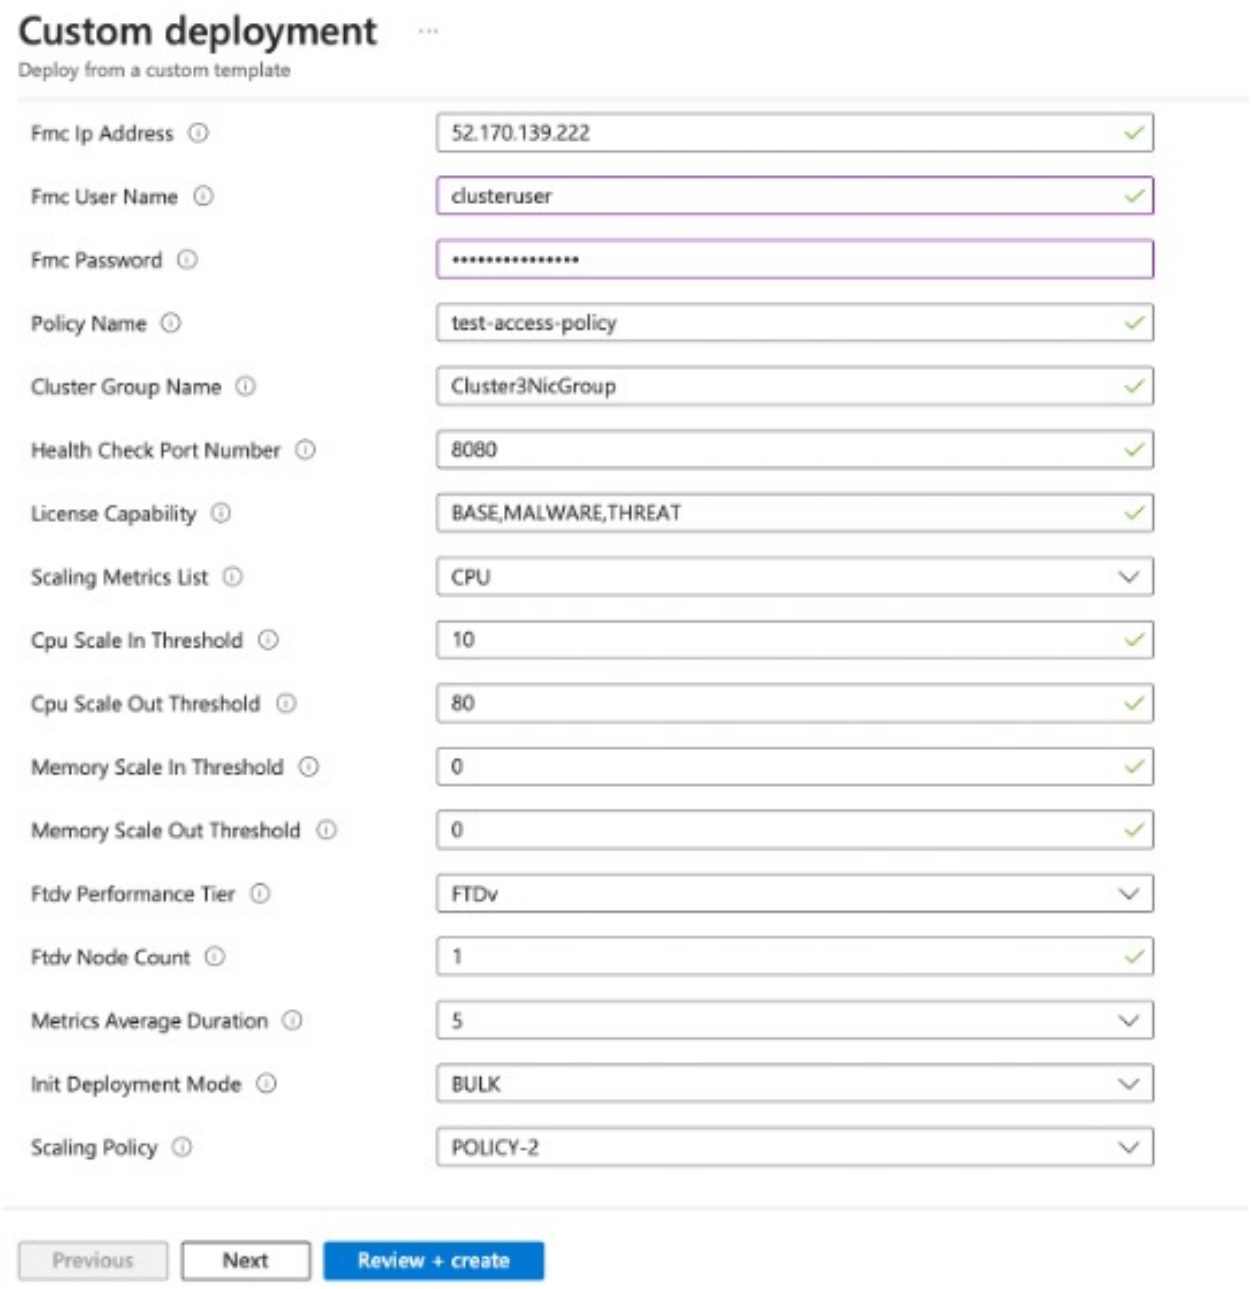


**Step 8** In the parameter field sections, fill all the parameters. Refer to Input Parameters for details about each parameter, then click **Review+Create**.

**Step 9** When a template deployment is successful, it creates all the required resources for the threat defense virtual auto scale for Azure solution. See the resources in the following figure. The **Type** column describes each resource, including the Logic App, VMSS, Load Balancers, Public IP address, etc.

**What to do next**

Deploy Azure Functions App, on page 44.

## Deploy Azure Functions App

When you deploy the ARM template, Azure creates the function app with the name **<resourceNamePrefix>-function-app**.

**Procedure**

**Step 1** Go to the function app you created when you deployed the ARM template and perform the following:

Run the following command from your local computer to deploy the cluster autoscale Azure Functions to the Function app.

```
az functionapp deployment source config-zip -g <Resource Group Name>
-n <Function App Name> --src  <cluster_functions.zip> --build-remote true
```

**Step 2** After the deployment of the Azure Functions, you can view the uploaded Functions in the overview section of the function application.

## Update the Azure Logic App

The Logic App acts as the orchestrator for the Autoscale functionality. The ARM template creates a skeleton Logic App, which you then need to update manually to provide the information necessary to function as the auto scale orchestrator.

**Procedure**

**Step 1** From the repository, retrieve the file *LogicApp.txt* to the local system and edit as shown below.

**Important**
Read and understand all of these steps before proceeding.

These manual steps are not automated in the ARM template so that only the Logic App can be upgraded independently later in time.

a) Required: Find and replace all the occurrences of “SUBSCRIPTION_ID” with your subscription ID information.
b) Required: Find and replace all the occurrences of “RG_NAME” with your resource group name.
c) Required: Find and replace all of the occurrences of “FUNCTIONAPPNAME” to your function app name.

The following example shows a few of these lines in the *LogicApp.txt* file:

```
  "AutoScaleManager": {
      "inputs": {
          "function": {
              "id":
"/subscriptions/SUBSCRIPTION_ID/resourceGroups/RG_NAME/providers/Microsoft.Web/sites/FUNCTIONAPPNAME/functions/AutoScaleManager"

          }
.
.
                      },
                      "Deploy_Changes_to_FTD": {
```

```
                        "inputs": {
                            "body": "@body('AutoScaleManager')",
                            "function": {
                                "id":
"/subscriptions/SUBSCRIPTION_ID/resourceGroups/RG_NAME/providers/Microsoft.Web/sites/FUNCTIONAPPNAME/functions/DeployConfiguration"

                            }
.
.
                    "DeviceDeRegister": {
                        "inputs": {
                            "body": "@body('AutoScaleManager')",
                            "function": {
                                "id":
"/subscriptions/SUBSCRIPTION_ID/resourceGroups/RG_NAME/providers/Microsoft.Web/sites/FUNCTIONAPPNAME/functions/DeviceDeRegister"

                            }
                        },
                        "runAfter": {
                            "Delay_For_connection_Draining": [
```

d) (Optional) Edit the trigger interval, or leave the default value (5). This is the time interval at which the Autoscale functionality is periodically triggered. The following example shows these lines in the *LogicApp.txt* file:

```
    "triggers": {
        "Recurrence": {
            "conditions": [],
            "inputs": {},
            "recurrence": {
                "frequency": "Minute",
                "interval": 5
            },
```

e) (Optional) Edit the time to drain, or leave the default value (5). This is the time interval to drain existing connections from the threat defense virtual before deleting the device during the Scale-In operation. The following example shows these lines in the *LogicApp.txt* file:

```
     "actions": {
          "Branch_based_on_Scale-In_or_Scale-Out_condition": {
              "actions": {
                  "Delay_For_connection_Draining": {
                      "inputs": {
                          "interval": {
                              "count": 5,
                              "unit": "Minute"
                          }
```

f) (Optional) Edit the cool down time, or leave the default value (10). This is the time to perform NO ACTION after the Scale-Out is complete. The following example shows these lines in the *LogicApp.txt* file:


```
                "actions": {
                    "Branch_based_on_Scale-Out_or_Invalid_condition": {
                        "actions": {
                            "Cooldown_time": {
                                "inputs": {
                                    "interval": {
                                        "count": 10,
                                        "unit": "Second"
```

```
}
```

**Note**
These steps can also be done from the Azure portal. Consult the Azure documentation for more information.


**Step 2** Go to the **Logic App code view**, delete the default contents and paste the contents from the edited *LogicApp.txt* file, and click **Save**.

***Figure 9: Logic App Code View***

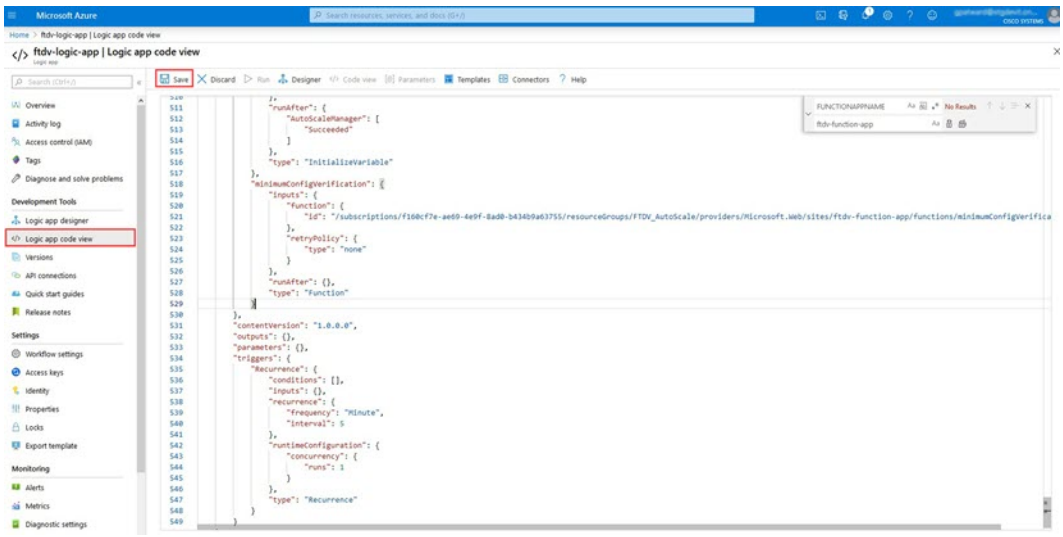



**Step 3** When you save the Logic App, it is in a 'Disabled' state. Click **Enable** when you want to start the Auto Scale Manager.

***Figure 10: Enable Logic App***

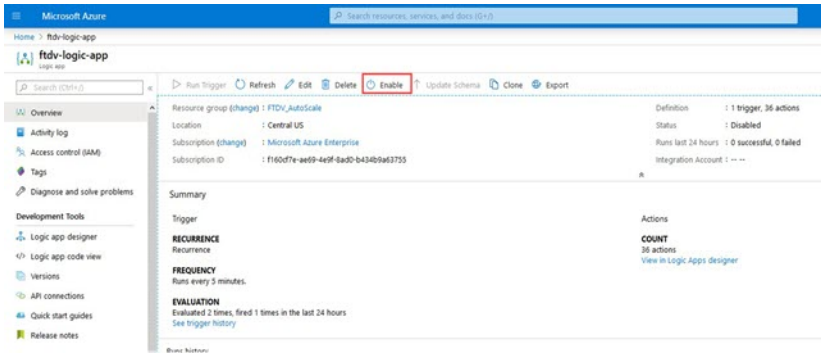


**Step 4** Once enabled, the tasks start running. Click the 'Running' status to see the activity.


*Figure 11: Logic App Running Status*

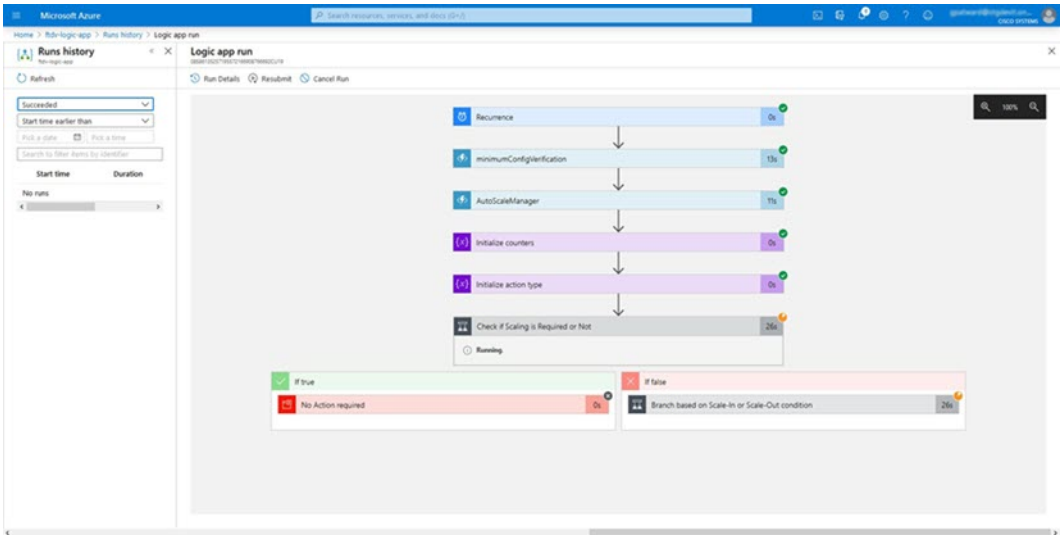


**Step 5** Once the Logic App starts, all the deployment-related steps are complete.

**Step 6** Verify in the VMSS that threat defense virtual instances are being created.

*Figure 12: Threat Defense Virtual Instances Running*

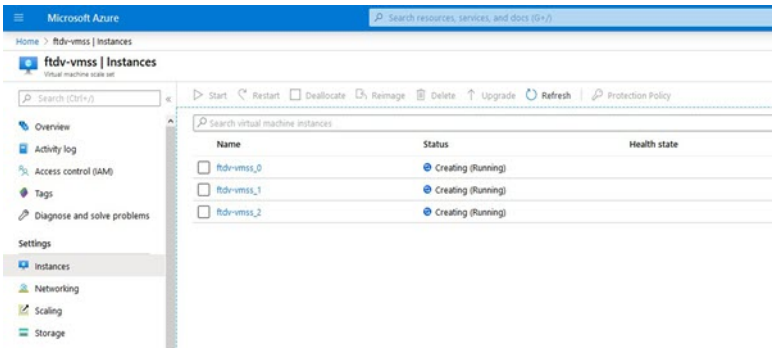


In this example, three threat defense virtual instances are launched because 'minFtdCount' was set to '3' and 'initDeploymentMode' was set to 'BULK' in the ARM template deployment.

# Add the Cluster to the Management Center (Manual Deployment)

Use this procedure to add the cluster to the management center if you manually deployed the cluster. If you used a template, the cluster will auto-register on the management center.

Add one of the cluster units as a new device to the management center; the management center auto-detects all other cluster members.


### Before you begin

- All cluster units must be in a successfully-formed cluster prior to adding the cluster to the management center. You should also check which unit is the control unit. Use the threat defense **show cluster info** command.

**Procedure**

**Step 1** In the management center, choose **Devices** > **Device Management**, and then choose **Add** > **Add Device** to add the control unit using the unit's management IP address.

***Figure 13: Add Device***

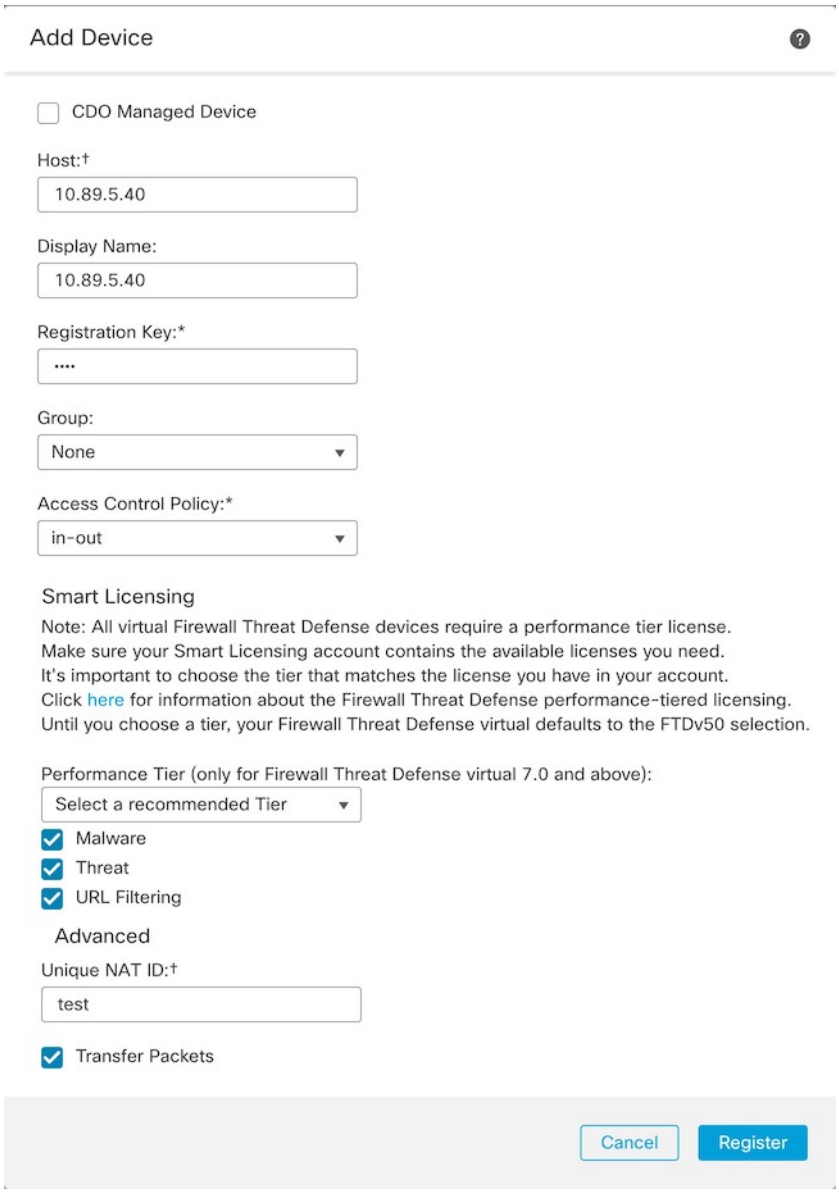


a) In the **Host** field, enter the IP address or hostname of the control unit.

We recommend adding the control unit for the best performance, but you can add any unit of the cluster.

If you used a NAT ID during device setup, you may not need to enter this field.

b) In the **Display Name** field, enter a name for the control unit as you want it to display in the management center.


This display name is not for the cluster; it is only for the control unit you are adding. You can later change the name of other cluster members and the cluster display name.

c) In the **Registration Key** field, enter the same registration key that you used during device setup. The registration key is a one-time-use shared secret.

d) (Optional) Add the device to a device **Group**.

e) Choose an initial **Access Control Policy** to deploy to the device upon registration, or create a new policy.

If you create a new policy, you create a basic policy only. You can later customize the policy as needed.

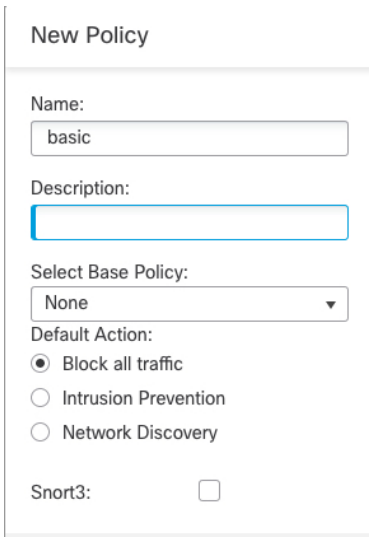


f) Choose licenses to apply to the device.

g) If you used a NAT ID during device setup, expand the **Advanced** section and enter the same NAT ID in the **Unique NAT ID** field.

h) Check the **Transfer Packets** check box to allow the device to transfer packets to the management center.


This option is enabled by default. When events like IPS or Snort are triggered with this option enabled, the device sends event metadata information and packet data to the management center for inspection. If you disable it, only event information will be sent to the management center but packet data is not sent.

i) Click **Register**.

The management center identifies and registers the control unit, and then registers all data units. If the control unit does not successfully register, then the cluster is not added. A registration failure can occur if the cluster was not up, or because of other connectivity issues. In this case, we recommend that you try re-adding the cluster unit.

The cluster name shows on the **Devices** > **Device Management** page; expand the cluster to see the cluster units.

***Figure 14: Cluster Management***

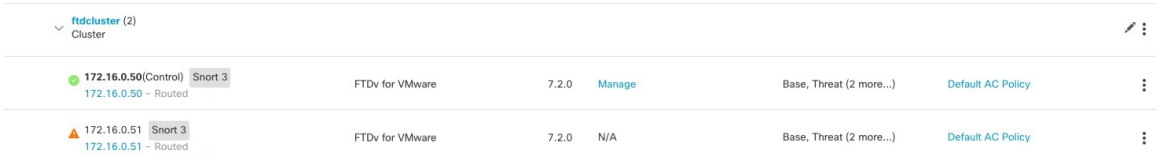



A unit that is currently registering shows the loading icon.

*Figure 15: Node Registration*




**Note**
GCP prioritizes nodes with public IP address during cluster node discovery. To ensure the Threat Defense Virtual cluster registers with the management center virtual using the private IP address, you must first disable the public IP address on the Threat Defense Virtual cluster node. This allows GCP node discovery to proceed using the private IP address for registration node with the management center virtual.


You can monitor cluster unit registration by clicking the **Notifications** icon and choosing **Tasks**. The management center updates the Cluster Registration task as each unit registers. If any units fail to register, see Reconcile Cluster Nodes, on page 59.

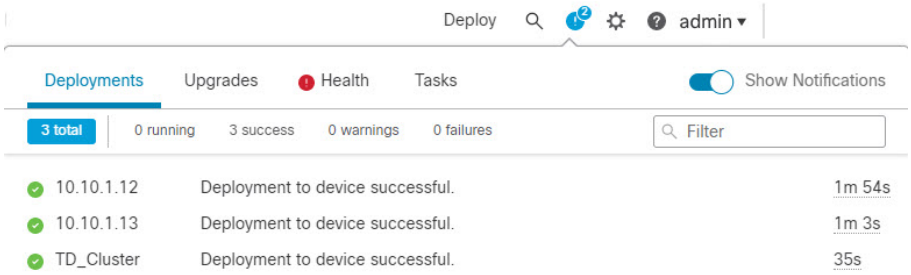


**Step 2** Configure device-specific settings by clicking the **Edit** (✎) for the cluster.


Most configuration can be applied to the cluster as a whole, and not nodes in the cluster. For example, you can change the display name per node, but you can only configure interfaces for the whole cluster.

**Step 3** On the **Devices** > **Device Management** > **Cluster** screen, you see **General**, **License**, **System**, and **Health** settings.

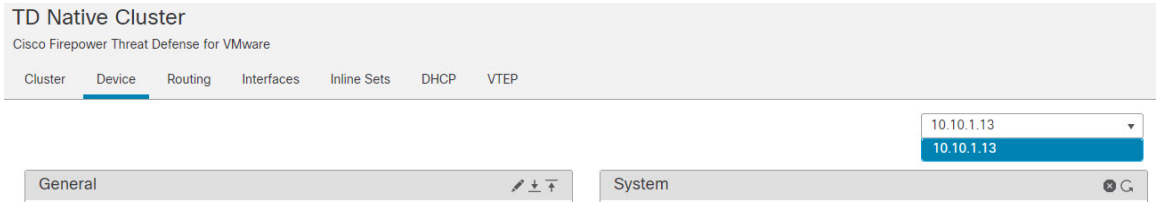



See the following cluster-specific items:


- **General > Name**—Change the cluster display name by clicking the **Edit** (✎).

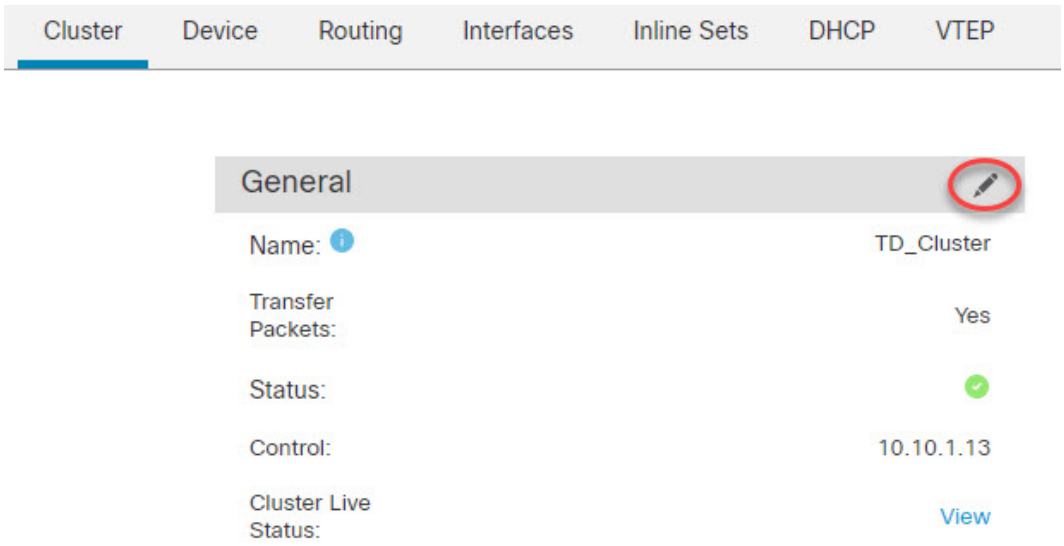



Then set the **Name** field.

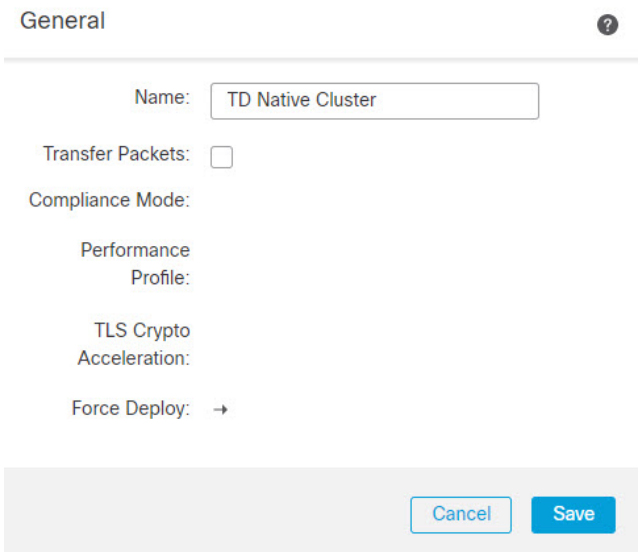


- **General > Cluster Live Status**—Click the **View** link to open the **Cluster Status** dialog box.

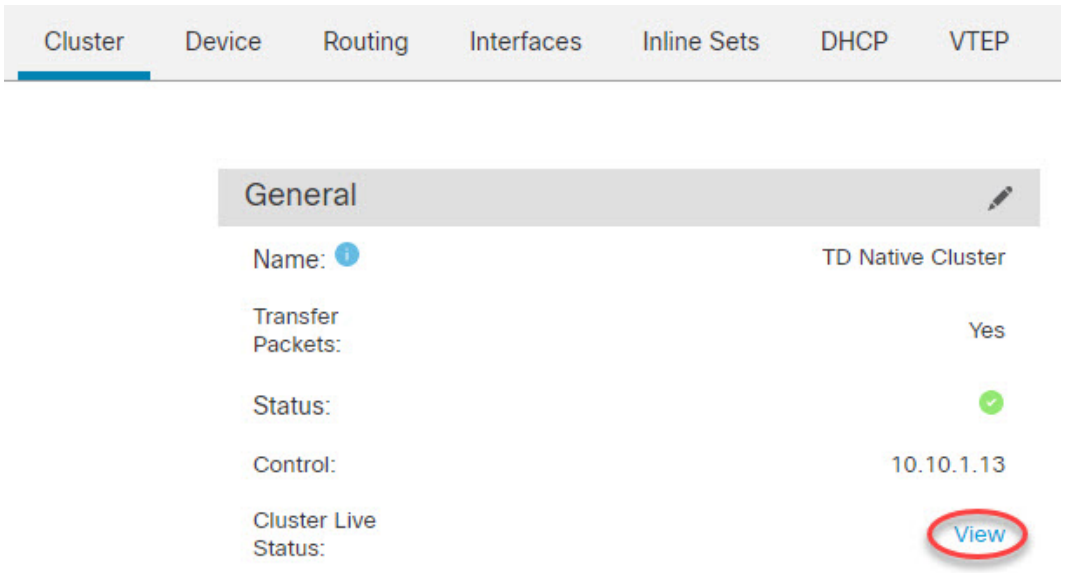



The **Cluster Status** dialog box also lets you retry data unit registration by clicking **Reconcile**.You can also ping the cluster control link from a node. See Perform a Ping on the Cluster Control Link, on page 66.

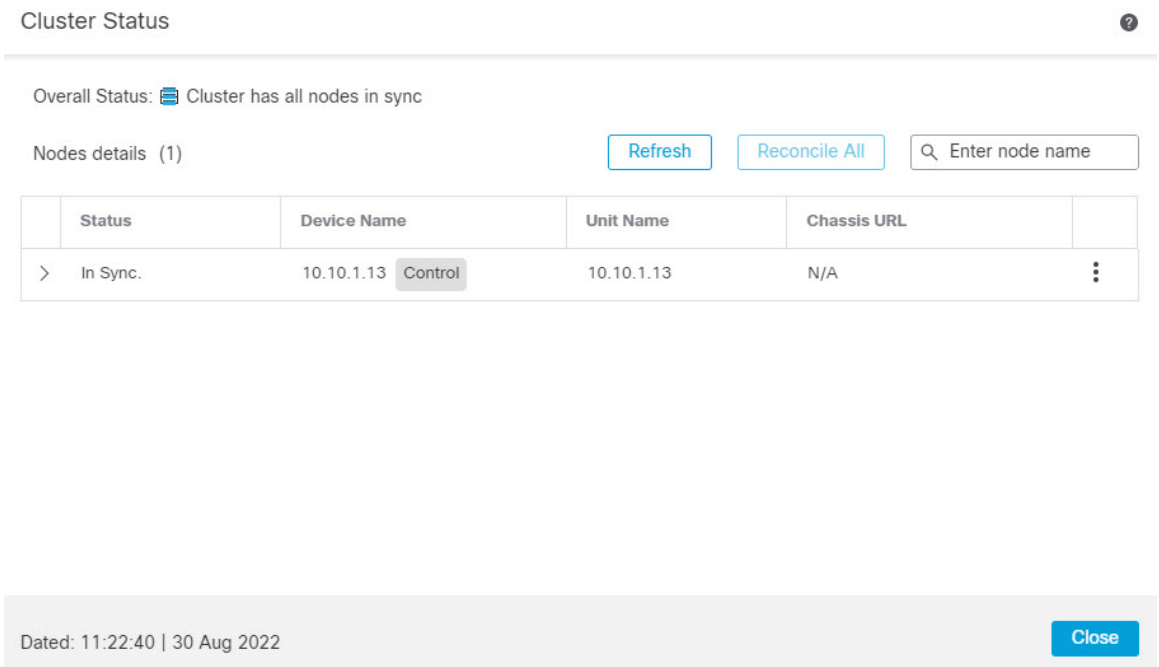


- **General > Troubleshoot**—You can generate and download troubleshooting logs, and you can view cluster CLIs. See Troubleshooting the Cluster, on page 66.


*Figure 16: Troubleshoot*

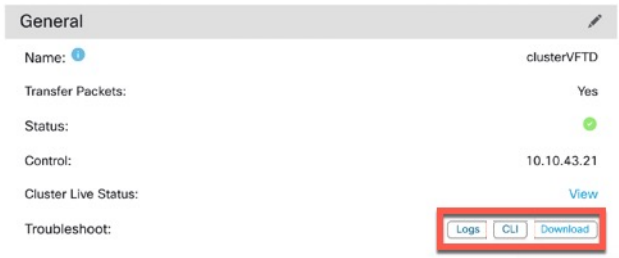



- **License**—Click **Edit** (✎) to set license entitlements.

**Step 4** On the **Devices** > **Device Management** > **Devices**, you can choose each member in the cluster from the top right drop-down menu and configure the following settings.


- **General > Name**—Change the cluster member display name by clicking the **Edit** (✎).

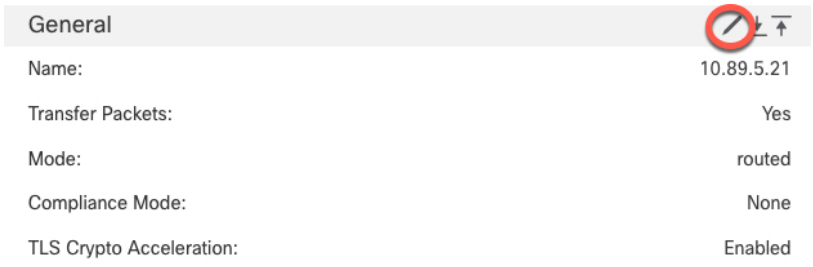


Then set the **Name** field.

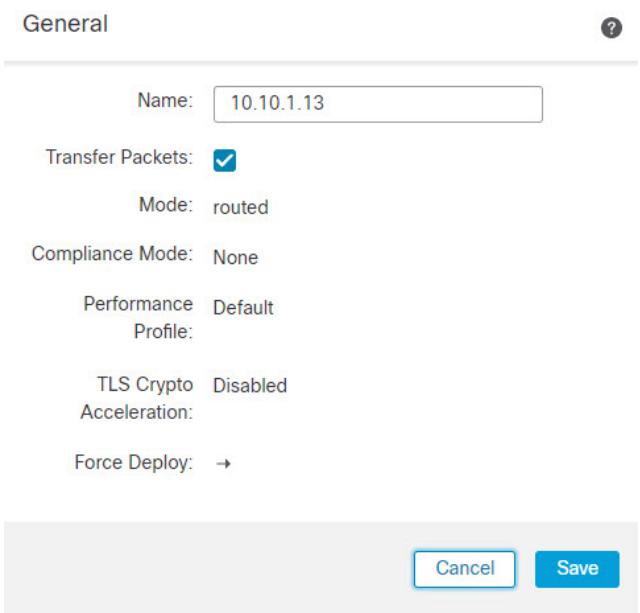

- **Management > Host**—If you change the management IP address in the device configuration, you must match the new address in the management center so that it can reach the device on the network; edit the **Host** address in the **Management** area.

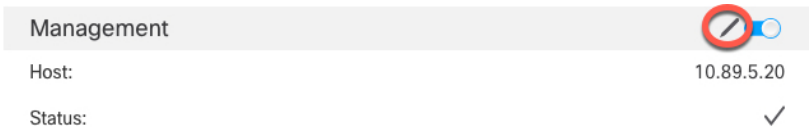


# Configure Cluster Health Monitor Settings

The **Cluster Health Monitor Settings** section of the **Cluster** page displays the settings described in the table below.

***Figure 17: Cluster Health Monitor Settings***

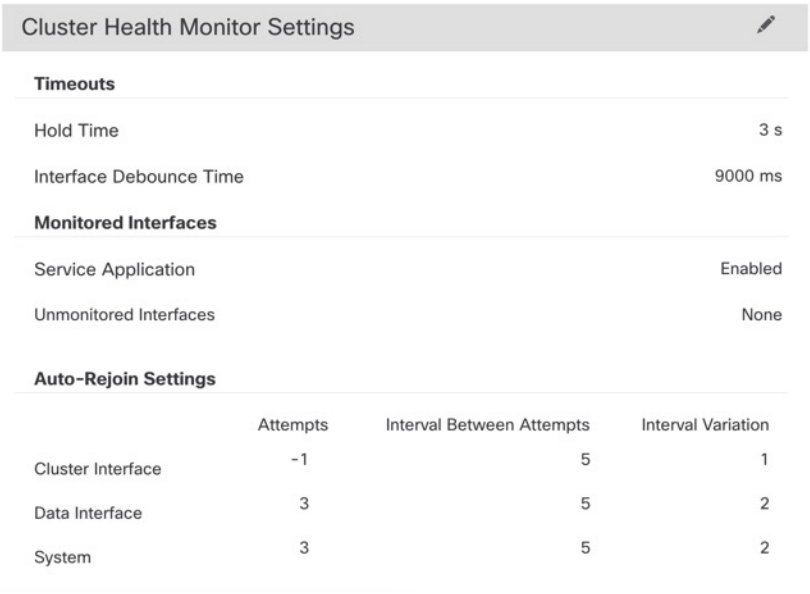



***Table 4: Cluster Health Monitor Settings Section Table Fields***

| Field | Description |
|---|---|
| **Timeouts** | |
| Hold Time | Between .3 and 45 seconds; The default is 3 seconds. To determine node system health, the cluster nodes send heartbeat messages on the cluster control link to other nodes. If a node does not receive any heartbeat messages from a peer node within the hold time period, the peer node is considered unresponsive or dead. |
| Interface Debounce Time | Between 300 and 9000 ms. The default is 500 ms. The interface debounce time is the amount of time before the node considers an interface to be failed, and the node is removed from the cluster. |

| Field | Description |
|---|---|
| **Monitored Interfaces** | The interface health check monitors for link failures. If all physical ports for a given logical interface fail on a particular node, but there are active ports under the same logical interface on other nodes, then the node is removed from the cluster. The amount of time before the node removes a member from the cluster depends on the type of interface and whether the node is an established node or is joining the cluster. |
| Service Application | Shows whether the Snort and disk-full processes are monitored. |
| Unmonitored Interfaces | Shows unmonitored interfaces. |
| **Auto-Rejoin Settings** | |
| Cluster Interface | Shows the auto-rejoin settings after a cluster control link failure. |
| *Attempts* | Between -1 and 65535. The default is -1 (unlimited). Sets the number of rejoin attempts. |
| *Interval Between Attempts* | Between 2 and 60. The default is 5 minutes. Defines the interval duration in minutes between rejoin attempts. |
| *Interval Variation* | Between 1 and 3. The default is 1x the interval duration. Defines if the interval duration increases at each attempt. |
| Data Interfaces | Shows the auto-rejoin settings after a data interface failure. |
| *Attempts* | Between -1 and 65535. The default is 3. Sets the number of rejoin attempts. |
| *Interval Between Attempts* | Between 2 and 60. The default is 5 minutes. Defines the interval duration in minutes between rejoin attempts. |
| *Interval Variation* | Between 1 and 3. The default is 2x the interval duration. Defines if the interval duration increases at each attempt. |
| System | Shows the auto-rejoin settings after internal errors. Internal failures include: application sync timeout; inconsistent application statuses; and so on. |
| *Attempts* | Between -1 and 65535. The default is 3. Sets the number of rejoin attempts. |
| *Interval Between Attempts* | Between 2 and 60. The default is 5 minutes. Defines the interval duration in minutes between rejoin attempts. |
| *Interval Variation* | Between 1 and 3. The default is 2x the interval duration. Defines if the interval duration increases at each attempt. |



**Note** If you disable the system health check, fields that do not apply when the system health check is disabled will not show.

You can change these settings from this section.

You can monitor any port-channel ID, single physical interface ID, as well as the Snort and disk-full processes. Health monitoring is not performed on VLAN subinterfaces or virtual interfaces such as VNIs or BVIs. You cannot configure monitoring for the cluster control link; it is always monitored.

**Procedure**

**Step 1** Choose **Devices** > **Device Management**.


**Step 2** Next to the cluster you want to modify, click **Edit** (✎).

**Step 3** Click **Cluster**.

**Step 4** In the **Cluster Health Monitor Settings** section, click **Edit** (✎).

**Step 5** Disable the system health check by clicking the **Health Check** slider .

***Figure 18: Disable the System Health Check***

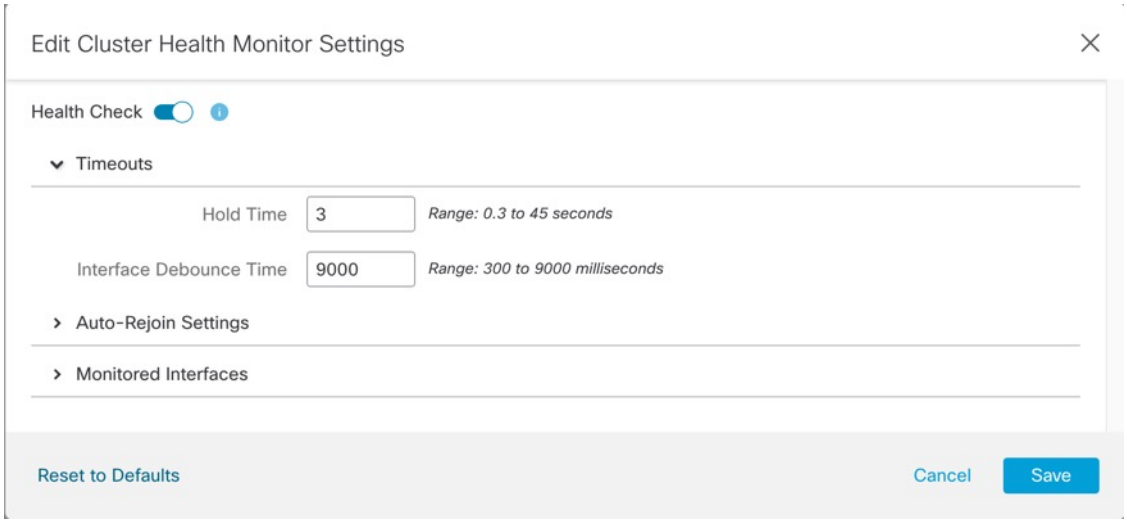



When any topology changes occur (such as adding or removing a data interface, enabling or disabling an interface on the node or the switch, or adding an additional switch to form a VSS or vPC or VNet) you should disable the system health check feature and also disable interface monitoring for the disabled interfaces. When the topology change is complete, and the configuration change is synced to all nodes, you can re-enable the system health check feature and monitored interfaces.

**Step 6** Configure the hold time and interface debounce time.

- **Hold Time**—Set the hold time to determine the amount of time between node heartbeat status messages, between .3 and 45 seconds; The default is 3 seconds.
- **Interface Debounce Time**—Set the debounce time between 300 and 9000 ms. The default is 500 ms. Lower values allow for faster detection of interface failures. Note that configuring a lower debounce time increases the chances of false-positives. When an interface status update occurs, the node waits the number of milliseconds specified before marking the interface as failed, and the node is removed from the cluster. In the case of an EtherChannel that transitions from a down state to an up state (for example, the switch reloaded, or the switch enabled an EtherChannel), a longer debounce time can prevent the interface from appearing to be failed on a cluster node just because another cluster node was faster at bundling the ports.

**Step 7** Customize the auto-rejoin cluster settings after a health check failure.

*Figure 19: Configure Auto-Rejoin Settings*

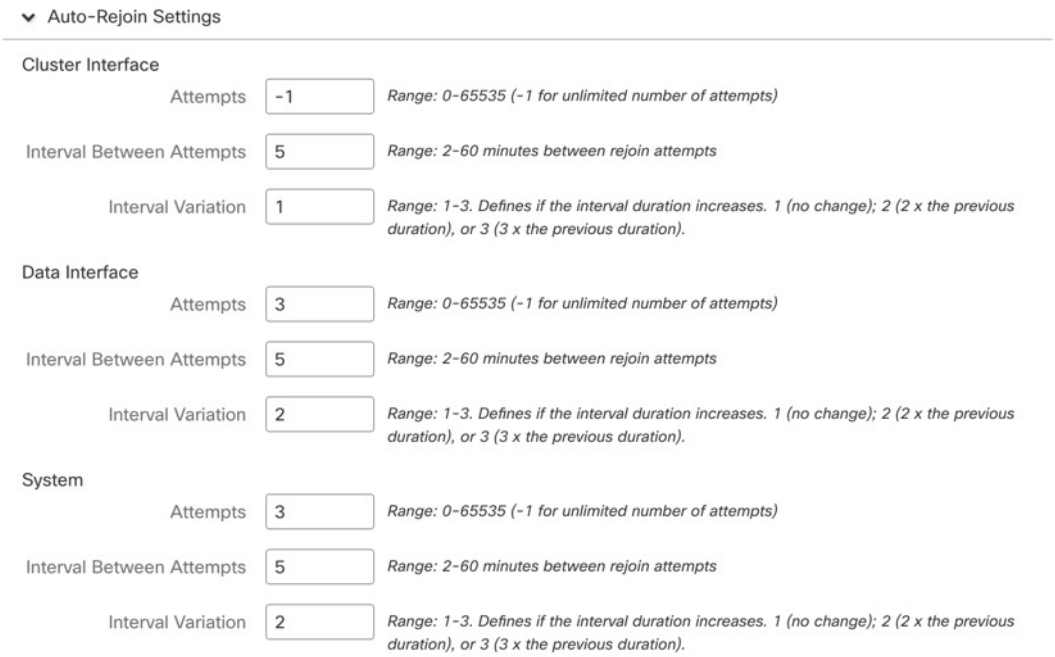



Set the following values for the **Cluster Interface**, **Data Interface**, and **System** (internal failures include: application sync timeout; inconsistent application statuses; and so on):

- **Attempts**—Sets the number of rejoin attempts, between -1 and 65535. **0** disables auto-rejoining. The default for the **Cluster Interface** is -1 (unlimited). The default for the **Data Interface** and **System** is 3.
- **Interval Between Attempts**—Defines the interval duration in minutes between rejoin attempts, between 2 and 60. The default value is 5 minutes. The maximum total time that the node attempts to rejoin the cluster is limited to 14400 minutes (10 days) from the time of last failure.
- **Interval Variation**—Defines if the interval duration increases. Set the value between 1 and 3: **1** (no change); **2** (2 x the previous duration), or **3** (3 x the previous duration). For example, if you set the interval duration to 5 minutes, and set the variation to 2, then the first attempt is after 5 minutes; the 2nd attempt is 10 minutes (2 x 5); the 3rd attempt 20 minutes (2 x 10), and so on. The default value is **1** for the **Cluster Interface** and **2** for the **Data Interface** and **System**.

**Step 8** Configure monitored interfaces by moving interfaces in the **Monitored Interfaces** or **Unmonitored Interfaces** window. You can also check or uncheck **Enable Service Application Monitoring** to enable or disable monitoring of the Snort and disk-full processes.

*Figure 20: Configure Monitored Interfaces*

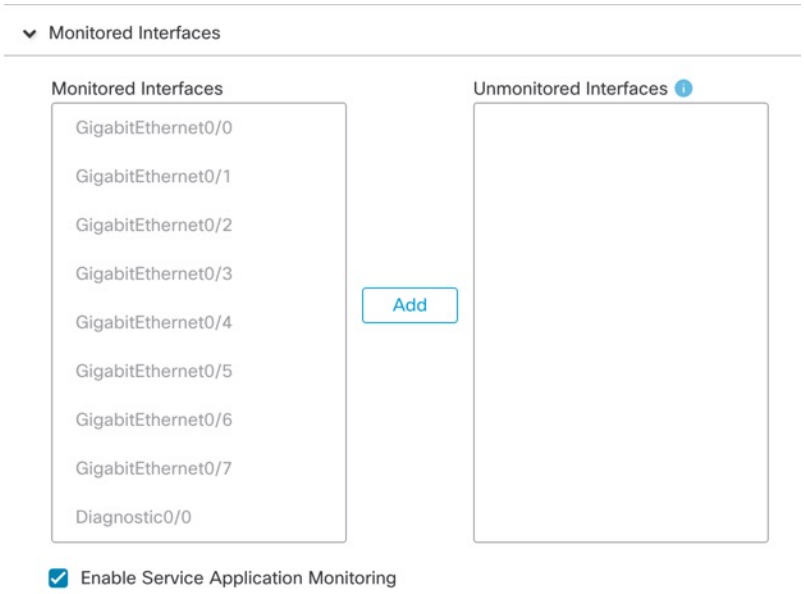


The interface health check monitors for link failures. If all physical ports for a given logical interface fail on a particular node, but there are active ports under the same logical interface on other nodes, then the node is removed from the cluster. The amount of time before the node removes a member from the cluster depends on the type of interface and whether the node is an established node or is joining the cluster. Health check is enabled by default for all interfaces and for the Snort and disk-full processes.

You might want to disable health monitoring of non-essential interfaces.

When any topology changes occur (such as adding or removing a data interface, enabling or disabling an interface on the node or the switch, or adding an additional switch to form a VSS or vPC or VNet) you should disable the system health check feature and also disable interface monitoring for the disabled interfaces. When the topology change is complete, and the configuration change is synced to all nodes, you can re-enable the system health check feature and monitored interfaces.

**Step 9** Click **Save**.

**Step 10** Deploy configuration changes.

# Manage Cluster Nodes

## Disable Clustering

You may want to deactivate a node in preparation for deleting the node, or temporarily for maintenance. This procedure is meant to temporarily deactivate a node; the node will still appear in the management center device list. When a node becomes inactive, all data interfaces are shut down.

**Note** Do not power off the node without first disabling clustering.

**Procedure**

**Step 1** For the unit you want to disable, choose **Devices** > **Device Management**, click the **More** (⋮), and choose **Disable Node Clustering**.

**Step 2** Confirm that you want to disable clustering on the node.

The node will show **(Disabled)** next to its name in the **Devices** > **Device Management** list.

**Step 3** To reenable clustering, see Rejoin the Cluster, on page 59.

## Rejoin the Cluster

If a node was removed from the cluster, for example for a failed interface or if you manually disabled clustering, you must manually rejoin the cluster. Make sure the failure is resolved before you try to rejoin the cluster. See Rejoining the Cluster, on page 74 for more information about why a node can be removed from a cluster.

**Procedure**

**Step 1** For the unit you want to reactivate, choose **Devices** > **Device Management**, click the **More** (⋮), and choose **Enable Node Clustering**.

**Step 2** Confirm that you want to enable clustering on the node.

## Reconcile Cluster Nodes


If a cluster node fails to register, you can reconcile the cluster membership from the device to the management center. For example, a data node might fail to register if the management center is occupied with certain processes, or if there is a network issue.

**Procedure**

**Step 1** Choose **Devices** > **Device Management** > **More** (⋮) for the cluster, and then choose **Cluster Live Status** to open the **Cluster Status** dialog box.

**Step 2** Click **Reconcile All**.

*Figure 21: Reconcile All*

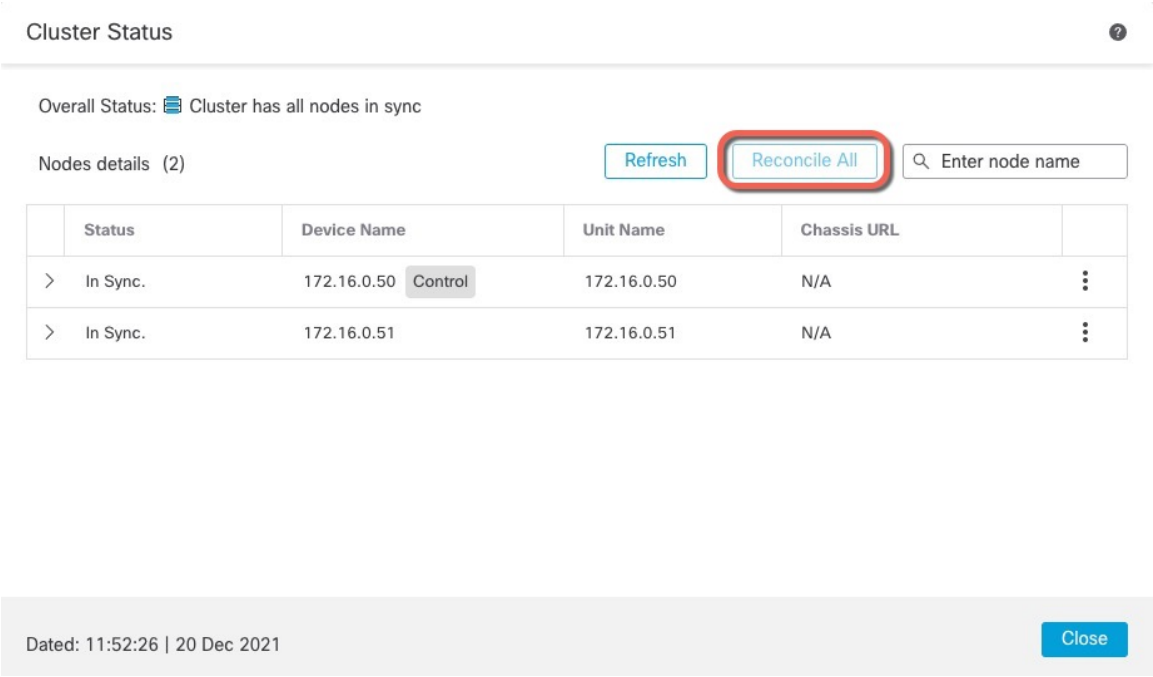


For more information about the cluster status, see Monitoring the Cluster, on page 61.

## Unregister the Cluster or Nodes and Register to a New Management Center

You can unregister the cluster from the management center, which keeps the cluster intact. You might want to unregister the cluster if you want to add the cluster to a new management center.

You can also unregister a node from the management center without breaking the node from the cluster. Although the node is not visible in the management center, it is still part of the cluster, and it will continue to pass traffic and could even become the control node. You cannot unregister the current control node. You might want to unregister the node if it is no longer reachable from the management center, but you still want to keep it as part of the cluster while you troubleshoot management connectivity.

Unregistering a cluster:

- Severs all communication between the management center and the cluster.
- Removes the cluster from the **Device Management** page.
- Returns the cluster to local time management if the cluster's platform settings policy is configured to receive time from the management center using NTP.
- Leaves the configuration intact, so the cluster continues to process traffic.

  Policies, such as NAT and VPN, ACLs, and the interface configurations remain intact.

Registering the cluster again to the same or a different management center causes the configuration to be removed, so the cluster will stop processing traffic at that point; the cluster configuration remains intact so you can add the cluster as a whole. You can choose an access control policy at registration, but you will have to re-apply other policies after registration and then deploy the configuration before it will process traffic again.

### Before you begin

This procedure requires CLI access to one of the nodes.

### Procedure

**Step 1** Choose **Devices** > **Device Management**, click **More** (⋮) for the cluster or node, and choose **Unregister**.

**Step 2** You are prompted to unregister the cluster or node; click **Yes**.

**Step 3** You can register the cluster to a new (or the same) management center by adding one of the cluster members as a new device.

You only need to add one of the cluster nodes as a device, and the rest of the cluster nodes will be discovered.

a) Connect to one cluster node's CLI, and identify the new management center using the **configure manager add** command.

b) Choose **Devices** > **Device Management**, and then click **Add Device**.


**Step 4** To re-add a deleted node, see Reconcile Cluster Nodes, on page 59.

# Monitoring the Cluster

You can monitor the cluster in the management center and at the threat defense CLI.

- **Cluster Status** dialog box, which is available from the **Devices** > **Device Management** > **More** (⋮) icon or from the **Devices** > **Device Management** > **Cluster** page > **General** area > **Cluster Live Status** link.

***Figure 22: Cluster Status***

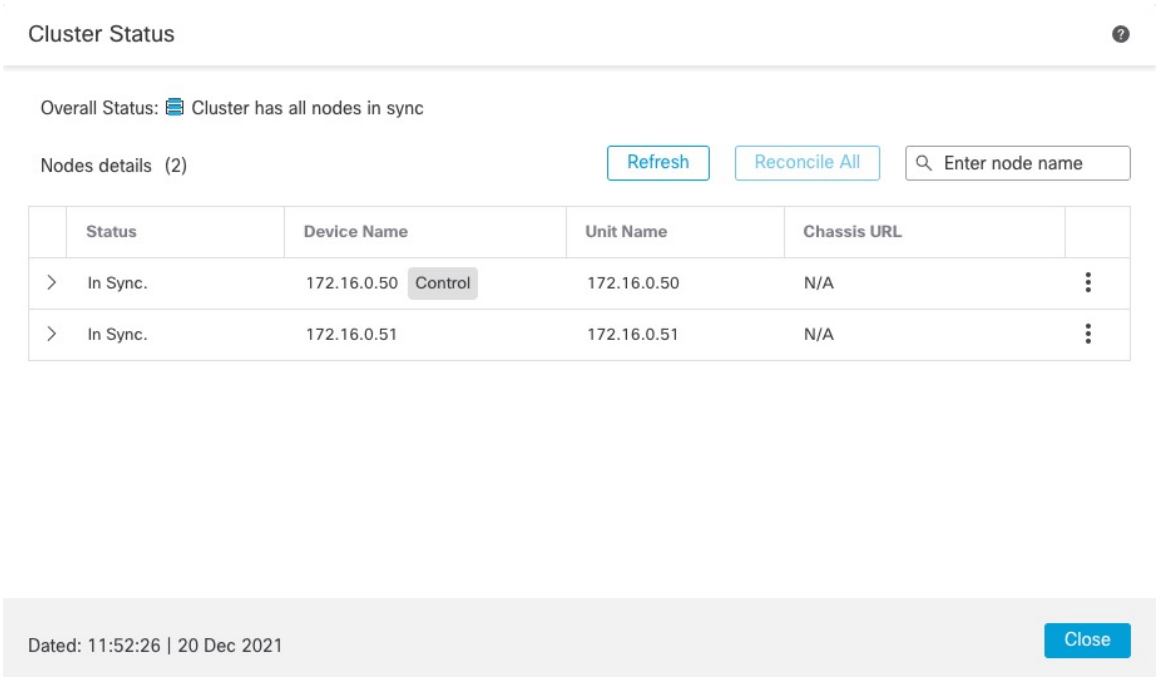

The Control node has a graphic indicator identifying its role.

Cluster member **Status** includes the following states:

- In Sync.—The node is registered with the management center.
- Pending Registration—The node is part of the cluster, but has not yet registered with the management center. If a node fails to register, you can retry registration by clicking **Reconcile All**.
- Clustering is disabled—The node is registered with the management center, but is an inactive member of the cluster. The clustering configuration remains intact if you intend to later re-enable it, or you can delete the node from the cluster.
- Joining cluster...—The node is joining the cluster on the chassis, but has not completed joining. After it joins, it will register with the management center.

For each node, you can view the **Summary** or the **History**.

***Figure 23: Node Summary***


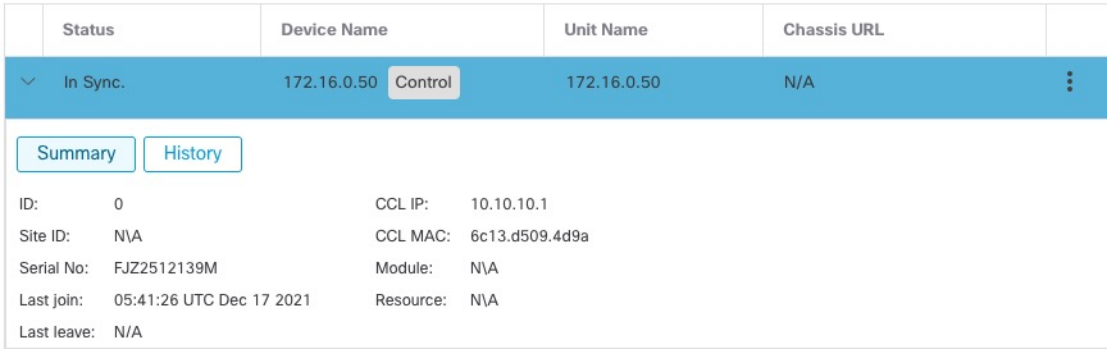



***Figure 24: Node History***

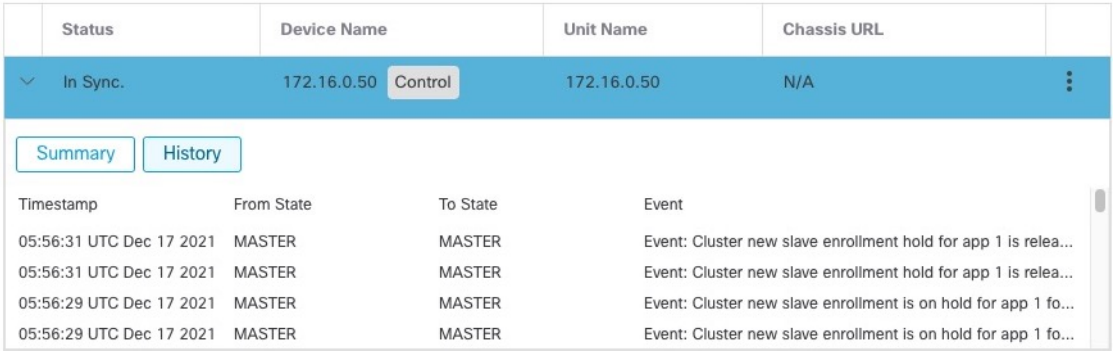


- **System** (⚙) > **Tasks** page.

  The **Tasks** page shows updates of the Cluster Registration task as each node registers.

- **Devices** > **Device Management** > *cluster_name*.

  When you expand the cluster on the devices listing page, you can see all member nodes, including the control node shown with its role next to the IP address. For nodes that are still registering, you can see the loading icon.

- **show cluster** {**access-list** [*acl_name*] | **conn** [**count**] | **cpu** [**usage**] | **history** | **interface-mode** | **memory** | **resource usage** | **service-policy** | **traffic** | **xlate count**}

To view aggregated data for the entire cluster or other information, use the **show cluster** command.

- **show cluster info** [**auto-join** | **clients** | **conn-distribution** | **flow-mobility counters** | **goid** [*options*] | **health** | **incompatible-config** | **loadbalance** | **old-members** | **packet-distribution** | **trace** [*options*] | **transport** { **asp** | **cp**}]

  To view cluster information, use the **show cluster info** command.

## Cluster Health Monitor Dashboard

### Cluster Health Monitor

When a threat defense is the control node of a cluster, the management center collects various metrics periodically from the device metric data collector. The cluster health monitor is comprised of the following components:

- Overview dashboard—Displays information about the cluster topology, cluster statistics, and metric charts:
  - The topology section displays a cluster's live status, the health of individual threat defense, threat defense node type (control node or data node), and the status of the device. The status of the device could be *Disabled* (when the device leaves the cluster), *Added out of box* (in a public cloud cluster, the additional nodes that do not belong to the management center), or *Normal* (ideal state of the node).
  - The cluster statistics section displays current metrics of the cluster with respect to the CPU usage, memory usage, input rate, output rate, active connections, and NAT translations.

  **Note** The CPU and memory metrics display the individual average of the data plane and snort usage.

  - The metric charts, namely, CPU Usage, Memory Usage, Throughput, and Connections, diagrammatically display the statistics of the cluster over the specified time period.
- Load Distribution dashboard—Displays load distribution across the cluster nodes in two widgets:
  - The Distribution widget displays the average packet and connection distribution over the time range across the cluster nodes. This data depicts how the load is being distributed by the nodes. Using this widget, you can easily identify any abnormalities in the load distribution and rectify it.
  - The Node Statistics widget displays the node level metrics in table format. It displays metric data on CPU usage, memory usage, input rate, output rate, active connections, and NAT translations across the cluster nodes. This table view enables you to correlate data and easily identify any discrepancies.
- Member Performance dashboard—Displays current metrics of the cluster nodes. You can use the selector to filter the nodes and view the details of a specific node. The metric data include CPU usage, memory usage, input rate, output rate, active connections, and NAT translations.
- CCL dashboard—Displays, graphically, the cluster control link data namely, the input, and output rate.
- Troubleshooting and Links — Provides convenient links to frequently used troubleshooting topics and procedures.
- Time range—An adjustable time window to constrain the information that appears in the various cluster metrics dashboards and widgets.
- Custom Dashboard—Displays data on both cluster-wide metrics and node-level metrics. However, node selection only applies for the threat defense metrics and not for the entire cluster to which the node belongs.

## Viewing Cluster Health

You must be an Admin, Maintenance, or Security Analyst user to perform this procedure.

The cluster health monitor provides a detailed view of the health status of a cluster and its nodes. This cluster health monitor provides health status and trends of the cluster in an array of dashboards.

### Before you begin

- Ensure you have created a cluster from one or more devices in the management center.

### Procedure

**Step 1** Choose **System** (⚙) > **Health** > **Monitor**.

Use the Monitoring navigation pane to access node-specific health monitors.

**Step 2** In the device list, click **Expand**( > ) and **Collapse** ( ⌄ ) to expand and collapse the list of managed cluster devices.

**Step 3** To view the cluster health statistics, click on the cluster name. The cluster monitor reports health and performance metrics in several predefined dashboards by default. The metrics dashboards include:

- Overview — Highlights key metrics from the other predefined dashboards, including its nodes, CPU, memory, input and output rates, connection statistics, and NAT translation information.
- Load Distribution — Traffic and packet distribution across the cluster nodes.
- Member Performance — Node-level statistics on CPU usage, memory usage, input throughput, output throughput, active connection, and NAT translation.
- CCL — Interface status and aggregate traffic statistics.

You can navigate through the various metrics dashboards by clicking on the labels. For a comprehensive list of the supported cluster metrics, see Cisco Secure Firewall Threat Defense Health Metrics.

**Step 4** You can configure the time range from the drop-down in the upper-right corner. The time range can reflect a period as short as the last hour (the default) or as long as two weeks. Select **Custom** from the drop-down to configure a custom start and end date.

Click the refresh icon to set auto refresh to 5 minutes or to toggle off auto refresh.

**Step 5** Click on deployment icon for a deployment overlay on the trend graph, with respect to the selected time range.

The deployment icon indicates the number of deployments during the selected time-range. A vertical band indicates the deployment start and end time. For multiple deployments, multiple bands/lines appear. Click on the icon on top of the dotted line to view the deployment details.

**Step 6** (For node-specific health monitor) View the **Health Alerts** for the node in the alert notification at the top of page, directly to the right of the device name.

Hover your pointer over the **Health Alerts** to view the health summary of the node. The popup window shows a truncated summary of the top five health alerts. Click on the popup to open a detailed view of the health alert summary.

**Step 7** (For node-specific health monitor) The device monitor reports health and performance metrics in several predefined dashboards by default. The metrics dashboards include:

- Overview — Highlights key metrics from the other predefined dashboards, including CPU, memory, interfaces, connection statistics; plus disk usage and critical process information.
- CPU — CPU utilization, including the CPU usage by process and by physical cores.
- Memory — Device memory utilization, including data plane and Snort memory usage.
- Interfaces — Interface status and aggregate traffic statistics.
- Connections — Connection statistics (such as elephant flows, active connections, peak connections, and so on) and NAT translation counts.
- Snort — Statistics that are related to the Snort process.
- ASP drops — Statistics related to the dropped packets against various reasons.

You can navigate through the various metrics dashboards by clicking on the labels. See Cisco Secure Firewall Threat Defense Health Metrics for a comprehensive list of the supported device metrics.

**Step 8** Click the plus sign **Add New Dashboard**(+) in the upper right corner of the health monitor to create a custom dashboard by building your own variable set from the available metric groups.

For cluster-wide dashboard, choose Cluster metric group, and then choose the metric.

## Cluster Metrics

The cluster health monitor tracks statistics that are related to a cluster and its nodes, and aggregate of load distribution, performance, and CCL traffic statistics.

***Table 5: Cluster Metrics***

| Metric | Description | Format |
|---|---|---|
| CPU | Average of CPU metrics on the nodes of a cluster (individually for data plane and snort). | percentage |
| Memory | Average of memory metrics on the nodes of a cluster (individually for data plane and snort). | percentage |
| Data Throughput | Incoming and outgoing data traffic statistics for a cluster. | bytes |
| CCL Throughput | Incoming and outgoing CCL traffic statistics for a cluster. | bytes |
| Connections | Count of active connections in a cluster. | number |
| NAT Translations | Count of NAT translations for a cluster. | number |
| Distribution | Connection distribution count in the cluster for every second. | number |
| Packets | Packet distribution count in the cluster for every second. | number |

# Troubleshooting the Cluster

You can use the **CCL Ping** tool to make sure the cluster control link is operating correctly. You can also use the following tools that are available for devices and clusters:

- Troubleshooting files—If a node fails to join the cluster, a troubleshooting file is automatically generated. You can also generate and download troubleshooting files from the **Devices** > **Device Management** > **Cluster** > **General** area.

  You can also generate files from the **Device Management** page by clicking **More** (⋮) and choosing **Troubleshoot Files**.

- CLI output—From the **Devices** > **Device Management** > **Cluster** > **General** area, you can view a set of pre-defined CLI outputs that can help you troubleshoot the cluster. The following commands are automatically run for the cluster:
  - **show running-config cluster**
  - **show cluster info**
  - **show cluster info health**
  - **show cluster info transport cp**
  - **show version**
  - **show asp drop**
  - **show counters**
  - **show arp**
  - **show int ip brief**
  - **show blocks**
  - **show cpu detailed**
  - **show interface** *ccl_interface*
  - **ping** *ccl_ip* **size** *ccl_mtu* **repeat 2**

  You can also enter any **show** command in the Command field.


## Perform a Ping on the Cluster Control Link

You can check to make sure all the cluster nodes can reach each other over the cluster control link by performing a ping. One major cause for the failure of a node to join the cluster is an incorrect cluster control link configuration; for example, the cluster control link MTU may be set higher than the connecting switch MTUs.

### Procedure


**Step 1** Choose **Devices** > **Device Management**, click the **More** (⋮) icon next to the cluster, and choose > **Cluster Live Status**.

*Figure 25: Cluster Status*

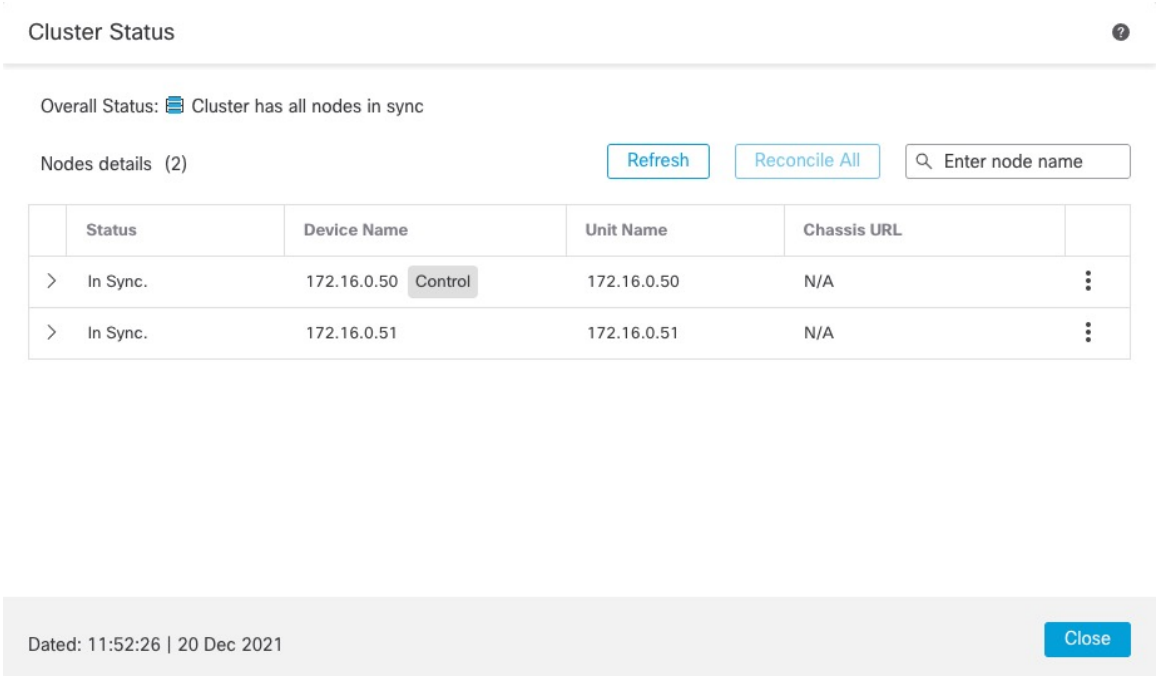


**Step 2** Expand one of the nodes, and click **CCL Ping**.

*Figure 26: CCL Ping*

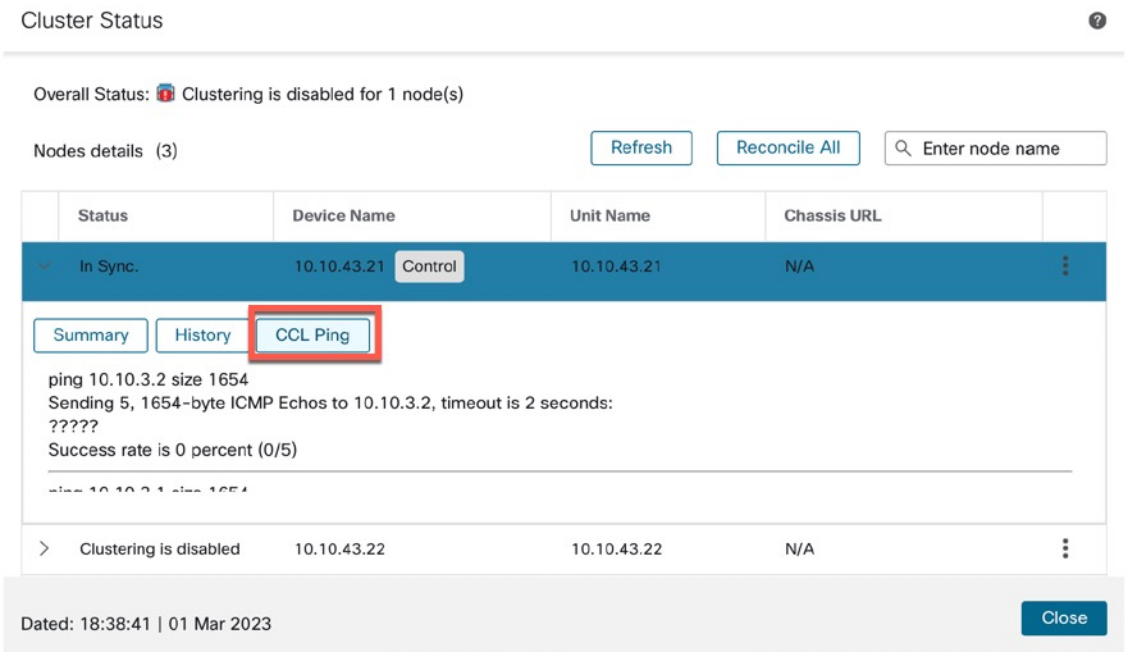


The node sends a ping on the cluster control link to every other node using a packet size that matches the maximum MTU.

# Upgrading the Cluster

Perform the following steps to upgrade a Threat Defense Virtual cluster:

**Procedure**

**Step 1** Upload the target image version to the cloud image storage.

**Step 2** Update the cloud instance template of the cluster with the updated target image version.

a) Create a copy of the instance template with the target image version.

b) Attach the newly created template to cluster instance group.

**Step 3** Upload the target image version upgrade package to the management center.

**Step 4** Perform readiness check on the cluster that you want to upgrade.

**Step 5** After successful readiness check, initiate installation of upgrade package.

**Step 6** The management center upgrades the cluster nodes one at a time.

**Step 7** The management center displays a notification after successful upgrade of the cluster.

There is no change in the serial number and UUID of the instance after the upgrade.

# Reference for Clustering

This section includes more information about how clustering operates.

## Threat Defense Features and Clustering

Some threat defense features are not supported with clustering, and some are only supported on the control unit. Other features might have caveats for proper usage.

### Unsupported Features and Clustering

These features cannot be configured with clustering enabled, and the commands will be rejected.



**Note** To view FlexConfig features that are also not supported with clustering, for example WCCP inspection, see the ASA general operations configuration guide. FlexConfig lets you configure many ASA features that are not present in the management center GUI.

- Remote access VPN (SSL VPN and IPsec VPN)
- DHCP client, server, and proxy. DHCP relay is supported.
- Virtual Tunnel Interfaces (VTIs)
- High Availability
- Integrated Routing and Bridging

- Management Center UCAPL/CC mode

### Centralized Features for Clustering

The following features are only supported on the control node, and are not scaled for the cluster.

**Note** Traffic for centralized features is forwarded from member nodes to the control node over the cluster control link.

If you use the rebalancing feature, traffic for centralized features may be rebalanced to non-control nodes before the traffic is classified as a centralized feature; if this occurs, the traffic is then sent back to the control node.

For centralized features, if the control node fails, all connections are dropped, and you have to re-establish the connections on the new control node.

**Note** To view FlexConfig features that are also centralized with clustering, for example RADIUS inspection, see the ASA general operations configuration guide. FlexConfig lets you configure many ASA features that are not present in the management center GUI.

- The following application inspections:
  - DCERPC
  - ESMTP
  - NetBIOS
  - PPTP
  - RSH
  - SQLNET
  - SUNRPC
  - TFTP
  - XDMCP
- Static route monitoring

### Cisco Trustsec and Clustering

Only the control node learns security group tag (SGT) information. The control node then populates the SGT to data nodes, and data nodes can make a match decision for SGT based on the security policy.


### Connection Settings and Clustering

Connection limits are enforced cluster-wide. Each node has an estimate of the cluster-wide counter values based on broadcast messages. Due to efficiency considerations, the configured connection limit across the cluster might not be enforced exactly at the limit number. Each node may overestimate or underestimate the cluster-wide counter value at any given time. However, the information will get updated over time in a load-balanced cluster.

## Dynamic Routing and Clustering

In Individual interface mode, each node runs the routing protocol as a standalone router, and routes are learned by each node independently.

***Figure 27: Dynamic Routing in Individual Interface Mode***

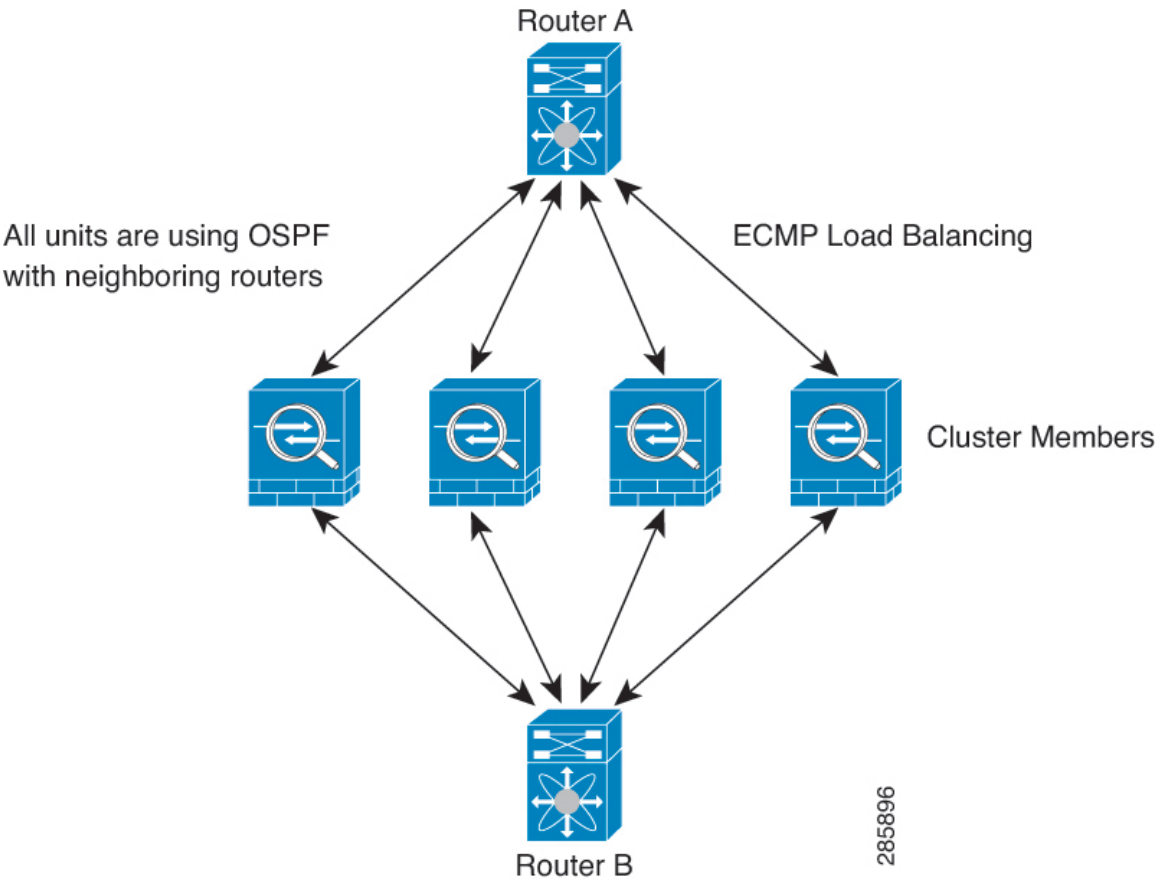


In the above diagram, Router A learns that there are 4 equal-cost paths to Router B, each through a node. ECMP is used to load balance traffic between the 4 paths. Each node picks a different router ID when talking to external routers.

You must configure a cluster pool for the router ID so that each node has a separate router ID.

## FTP and Clustering

- If FTP data channel and control channel flows are owned by different cluster members, then the data channel owner will periodically send idle timeout updates to the control channel owner and update the idle timeout value. However, if the control flow owner is reloaded, and the control flow is re-hosted, the parent/child flow relationship will not longer be maintained; the control flow idle timeout will not be updated.

## NAT and Clustering

For NAT usage, see the following limitations.

NAT can affect the overall throughput of the cluster. Inbound and outbound NAT packets can be sent to different threat defenses in the cluster, because the load balancing algorithm relies on IP addresses and ports, and NAT causes inbound and outbound packets to

have different IP addresses and/or ports. When a packet arrives at the threat defense that is not the NAT owner, it is forwarded over the cluster control link to the owner, causing large amounts of traffic on the cluster control link. Note that the receiving node does not create a forwarding flow to the owner, because the NAT owner may not end up creating a connection for the packet depending on the results of security and policy checks.

If you still want to use NAT in clustering, then consider the following guidelines:

- No Proxy ARP—For Individual interfaces, a proxy ARP reply is never sent for mapped addresses. This prevents the adjacent router from maintaining a peer relationship with an ASA that may no longer be in the cluster. The upstream router needs a static route or PBR with Object Tracking for the mapped addresses that points to the Main cluster IP address.
- PAT with Port Block Allocation—See the following guidelines for this feature:
  - Maximum-per-host limit is not a cluster-wide limit, and is enforced on each node individually. Thus, in a 3-node cluster with the maximum-per-host limit configured as 1, if the traffic from a host is load-balanced across all 3 nodes, then it can get allocated 3 blocks with 1 in each node.
  - Port blocks created on the backup node from the backup pools are not accounted for when enforcing the maximum-per-host limit.
  - On-the-fly PAT rule modifications, where the PAT pool is modified with a completely new range of IP addresses, will result in xlate backup creation failures for the xlate backup requests that were still in transit while the new pool became effective. This behavior is not specific to the port block allocation feature, and is a transient PAT pool issue seen only in cluster deployments where the pool is distributed and traffic is load-balanced across the cluster nodes.
  - When operating in a cluster, you cannot simply change the block allocation size. The new size is effective only after you reload each device in the cluster. To avoid having to reload each device, we recommend that you delete all block allocation rules and clear all xlates related to those rules. You can then change the block size and recreate the block allocation rules.
- NAT pool address distribution for dynamic PAT—When you configure a PAT pool, the cluster divides each IP address in the pool into port blocks. By default, each block is 512 ports, but if you configure port block allocation rules, your block setting is used instead. These blocks are distributed evenly among the nodes in the cluster, so that each node has one or more blocks for each IP address in the PAT pool. Thus, you could have as few as one IP address in a PAT pool for a cluster, if that is sufficient for the number of PAT'ed connections you expect. Port blocks cover the 1024-65535 port range, unless you configure the option to include the reserved ports, 1-1023, on the PAT pool NAT rule.
- Reusing a PAT pool in multiple rules—To use the same PAT pool in multiple rules, you must be careful about the interface selection in the rules. You must either use specific interfaces in all rules, or "any" in all rules. You cannot mix specific interfaces and "any" across the rules, or the system might not be able to match return traffic to the right node in the cluster. Using unique PAT pools per rule is the most reliable option.
- No round-robin—Round-robin for a PAT pool is not supported with clustering.
- No extended PAT—Extended PAT is not supported with clustering.
- Dynamic NAT xlates managed by the control node—The control node maintains and replicates the xlate table to data nodes. When a data node receives a connection that requires dynamic NAT, and the xlate is not in the table, it requests the xlate from the control node. The data node owns the connection.
- Stale xlates—The xlate idle time on the connection owner does not get updated. Thus, the idle time might exceed the idle timeout. An idle timer value higher than the configured timeout with a refcnt of 0 is an indication of a stale xlate.
- No static PAT for the following inspections—
  - FTP
  - RSH

  - SQLNET
  - TFTP
  - XDMCP
  - SIP

- If you have an extremely large number of NAT rules, over ten thousand, you should enable the transactional commit model using the **asp rule-engine transactional-commit nat** command in the device CLI. Otherwise, the node might not be able to join the cluster.

### SIP Inspection and Clustering

A control flow can be created on any node (due to load balancing); its child data flows must reside on the same node.

### SNMP and Clustering

You should always use the Local address, and not the Main cluster IP address for SNMP polling. If the SNMP agent polls the Main cluster IP address, if a new control node is elected, the poll to the new control node will fail.

### Syslog and Clustering

- Each node in the cluster generates its own syslog messages. You can configure logging so that each node uses either the same or a different device ID in the syslog message header field. For example, the hostname configuration is replicated and shared by all nodes in the cluster. If you configure logging to use the hostname as the device ID, syslog messages generated by all nodes look as if they come from a single node. If you configure logging to use the local-node name that is assigned in the cluster bootstrap configuration as the device ID, syslog messages look as if they come from different nodes.

### VPN and Clustering

Site-to-site VPN is a centralized feature; only the control node supports VPN connections.



**Note** Remote access VPN is not supported with clustering.

VPN functionality is limited to the control node and does not take advantage of the cluster high availability capabilities. If the control node fails, all existing VPN connections are lost, and VPN users will see a disruption in service. When a new control node is elected, you must reestablish the VPN connections.

For connections to an Individual interface when using PBR or ECMP, you must always connect to the Main cluster IP address, not a Local address.

VPN-related keys and certificates are replicated to all nodes.

## Performance Scaling Factor

When you combine multiple units into a cluster, you can expect the total cluster performance to be approximately 80% of the maximum combined throughput.

For example, if your model can handle approximately 10 Gbps of traffic when running alone, then for a cluster of 8 units, the maximum combined throughput will be approximately 80% of 80 Gbps (8 units x 10 Gbps): 64 Gbps.

## Control Node Election

Nodes of the cluster communicate over the cluster control link to elect a control node as follows:

1. When you enable clustering for a node (or when it first starts up with clustering already enabled), it broadcasts an election request every 3 seconds.
2. Any other nodes with a higher priority respond to the election request; the priority is set between 1 and 100, where 1 is the highest priority.
3. If after 45 seconds, a node does not receive a response from another node with a higher priority, then it becomes the control node.



**Note** If multiple nodes tie for the highest priority, the cluster node name and then the serial number is used to determine the control node.

4. If a node later joins the cluster with a higher priority, it does not automatically become the control node; the existing control node always remains as the control node unless it stops responding, at which point a new control node is elected.
5. In a "split brain" scenario when there are temporarily multiple control nodes, then the node with highest priority retains the role while the other nodes return to data node roles.



**Note** You can manually force a node to become the control node. For centralized features, if you force a control node change, then all connections are dropped, and you have to re-establish the connections on the new control node.

## High Availability within the Cluster

Clustering provides high availability by monitoring node and interface health and by replicating connection states between nodes.

### Node Health Monitoring

Each node periodically sends a broadcast heartbeat packet over the cluster control link. If the control node does not receive any heartbeat packets or other packets from a data node within the configurable timeout period, then the control node removes the data node from the cluster. If the data nodes do not receive packets from the control node, then a new control node is elected from the remaining nodes.

If nodes cannot reach each other over the cluster control link because of a network failure and not because a node has actually failed, then the cluster may go into a "split brain" scenario where isolated data nodes will elect their own control nodes. For example, if a router fails between two cluster locations, then the original control node at location 1 will remove the location 2 data nodes from the cluster. Meanwhile, the nodes at location 2 will elect their own control node and form their own cluster. Note that asymmetric traffic may fail in this scenario. After the cluster control link is restored, then the control node that has the higher priority will keep the control node’s role.

### Interface Monitoring

Each node monitors the link status of all named hardware interfaces in use, and reports status changes to the control node.

All physical interfaces are monitored; only named interfaces can be monitored. You can optionally disable monitoring per interface.

A node is removed from the cluster if its monitored interfaces fail. The node is removed after 500 ms.

### Status After Failure

If the control node fails, then another member of the cluster with the highest priority (lowest number) becomes the control node.

The Threat Defense automatically tries to rejoin the cluster, depending on the failure event.

**Note** When the Threat Defense becomes inactive and fails to automatically rejoin the cluster, all data interfaces are shut down; only the Management interface can send and receive traffic.

### Rejoining the Cluster

After a cluster member is removed from the cluster, how it can rejoin the cluster depends on why it was removed:

- Failed cluster control link when initially joining—After you resolve the problem with the cluster control link, you must manually rejoin the cluster by re-enabling clustering.
- Failed cluster control link after joining the cluster—The threat defense automatically tries to rejoin every 5 minutes, indefinitely.
- Failed data interface—The threat defense automatically tries to rejoin at 5 minutes, then at 10 minutes, and finally at 20 minutes. If the join is not successful after 20 minutes, then the threat defense application disables clustering. After you resolve the problem with the data interface, you have to manually enable clustering.
- Failed node—If the node was removed from the cluster because of a node health check failure, then rejoining the cluster depends on the source of the failure. For example, a temporary power failure means the node will rejoin the cluster when it starts up again as long as the cluster control link is up. The threat defense application attempts to rejoin the cluster every 5 seconds.
- Internal error—Internal failures include: application sync timeout; inconsistent application statuses; and so on. After you resolve the problem, you must manually rejoin the cluster by re-enabling clustering.
- Failed configuration deployment—If you deploy a new configuration from management center, and the deployment fails on some cluster members but succeeds on others, then the nodes that failed are removed from the cluster. You must manually rejoin the cluster by re-enabling clustering. If the deployment fails on the control node, then the deployment is rolled back, and no members are removed. If the deployment fails on all data nodes, then the deployment is rolled back, and no members are removed.

### Data Path Connection State Replication

Every connection has one owner and at least one backup owner in the cluster. The backup owner does not take over the connection in the event of a failure; instead, it stores TCP/UDP state information, so that the connection can be seamlessly transferred to a new owner in case of a failure. The backup owner is usually also the director.

Some traffic requires state information above the TCP or UDP layer. See the following table for clustering support or lack of support for this kind of traffic.

***Table 6: Features Replicated Across the Cluster***

| Traffic | State Support | Notes |
|---|---|---|
| Up time | Yes | Keeps track of the system up time. |
| ARP Table | Yes | Transparent mode only. |
| MAC address table | Yes | Transparent mode only. |
| User Identity | Yes | — |

| Traffic | State Support | Notes |
|---|---|---|
| Dynamic routing | Yes | — |
| SNMP Engine ID | **No** | — |

## How the Cluster Manages Connections

Connections can be load-balanced to multiple nodes of the cluster. Connection roles determine how connections are handled in both normal operation and in a high availability situation.

### Connection Roles

See the following roles defined for each connection:

- Owner—Usually, the node that initially receives the connection. The owner maintains the TCP state and processes packets. A connection has only one owner. If the original owner fails, then when new nodes receive packets from the connection, the director chooses a new owner from those nodes.
- Backup owner—The node that stores TCP/UDP state information received from the owner, so that the connection can be seamlessly transferred to a new owner in case of a failure. The backup owner does not take over the connection in the event of a failure. If the owner becomes unavailable, then the first node to receive packets from the connection (based on load balancing) contacts the backup owner for the relevant state information so it can become the new owner.

  As long as the director (see below) is not the same node as the owner, then the director is also the backup owner. If the owner chooses itself as the director, then a separate backup owner is chosen.
- Director—The node that handles owner lookup requests from forwarders. When the owner receives a new connection, it chooses a director based on a hash of the source/destination IP address and ports (see below for ICMP hash details), and sends a message to the director to register the new connection. If packets arrive at any node other than the owner, the node queries the director about which node is the owner so it can forward the packets. A connection has only one director. If a director fails, the owner chooses a new director.

  As long as the director is not the same node as the owner, then the director is also the backup owner (see above). If the owner chooses itself as the director, then a separate backup owner is chosen.

  ICMP/ICMPv6 hash details:

  - For Echo packets, the source port is the ICMP identifier, and the destination port is 0.
  - For Reply packets, the source port is 0, and the destination port is the ICMP identifier.
  - For other packets, both source and destination ports are 0.

- Forwarder—A node that forwards packets to the owner. If a forwarder receives a packet for a connection it does not own, it queries the director for the owner, and then establishes a flow to the owner for any other packets it receives for this connection. The director can also be a forwarder. Note that if a forwarder receives the SYN-ACK packet, it can derive the owner directly from a SYN cookie in the packet, so it does not need to query the director. (If you disable TCP sequence randomization, the SYN cookie is not used; a query to the director is required.) For short-lived flows such as DNS and ICMP, instead of querying, the forwarder immediately sends the packet to the director, which then sends them to the owner. A connection can have multiple forwarders; the most efficient throughput is achieved by a good load-balancing method where there are no forwarders and all packets of a connection are received by the owner.

**Note** We do not recommend disabling TCP sequence randomization when using clustering. There is a small chance that some TCP sessions won't be established, because the SYN/ACK packet might be dropped.


- Fragment Owner—For fragmented packets, cluster nodes that receive a fragment determine a fragment owner using a hash of the fragment source IP address, destination IP address, and the packet ID. All fragments are then forwarded to the fragment owner over the cluster control link. Fragments may be load-balanced to different cluster nodes, because only the first fragment includes the 5-tuple used in the switch load balance hash. Other fragments do not contain the source and destination ports and may be load-balanced to other cluster nodes. The fragment owner temporarily reassembles the packet so it can determine the director based on a hash of the source/destination IP address and ports. If it is a new connection, the fragment owner will register to be the connection owner. If it is an existing connection, the fragment owner forwards all fragments to the provided connection owner over the cluster control link. The connection owner will then reassemble all fragments.

## New Connection Ownership

When a new connection is directed to a node of the cluster via load balancing, that node owns both directions of the connection. If any connection packets arrive at a different node, they are forwarded to the owner node over the cluster control link. If a reverse flow arrives at a different node, it is redirected back to the original node.

## Sample Data Flow for TCP

The following example shows the establishment of a new connection.

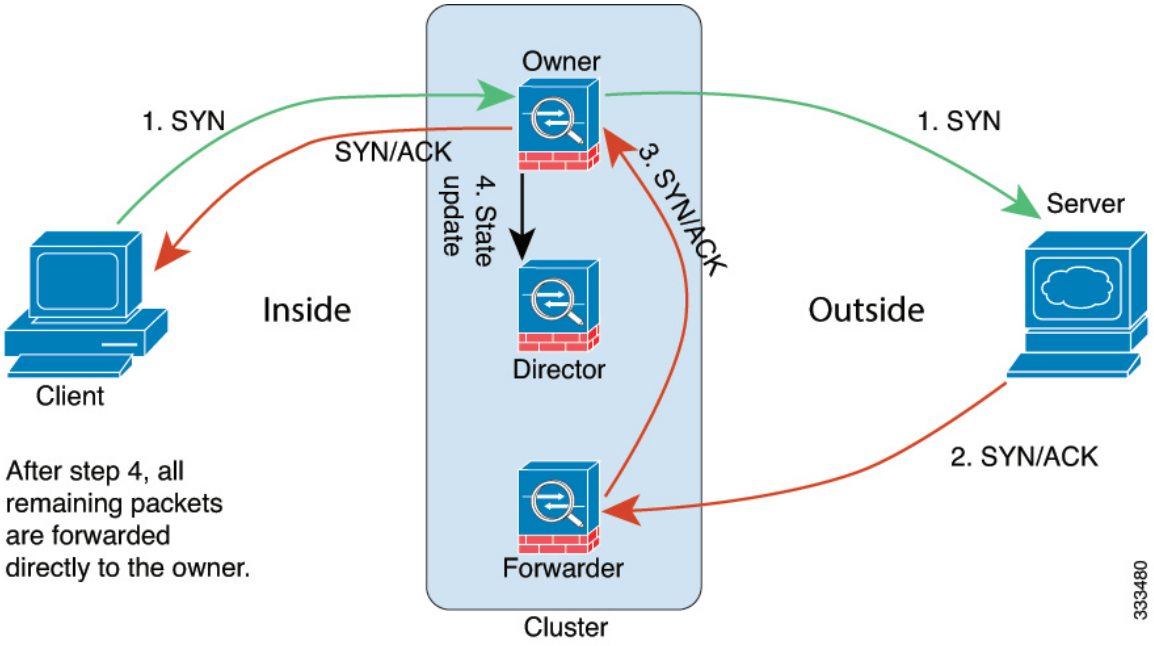



1. The SYN packet originates from the client and is delivered to one threat defense (based on the load balancing method), which becomes the owner. The owner creates a flow, encodes owner information into a SYN cookie, and forwards the packet to the server.
2. The SYN-ACK packet originates from the server and is delivered to a different threat defense (based on the load balancing method). This threat defense is the forwarder.

3. Because the forwarder does not own the connection, it decodes owner information from the SYN cookie, creates a forwarding flow to the owner, and forwards the SYN-ACK to the owner.
4. The owner sends a state update to the director, and forwards the SYN-ACK to the client.
5. The director receives the state update from the owner, creates a flow to the owner, and records the TCP state information as well as the owner. The director acts as the backup owner for the connection.
6. Any subsequent packets delivered to the forwarder will be forwarded to the owner.
7. If packets are delivered to any additional nodes, it will query the director for the owner and establish a flow.
8. Any state change for the flow results in a state update from the owner to the director.

## Sample Data Flow for ICMP and UDP

The following example shows the establishment of a new connection.

1. ***Figure 28: ICMP and UDP Data Flow***

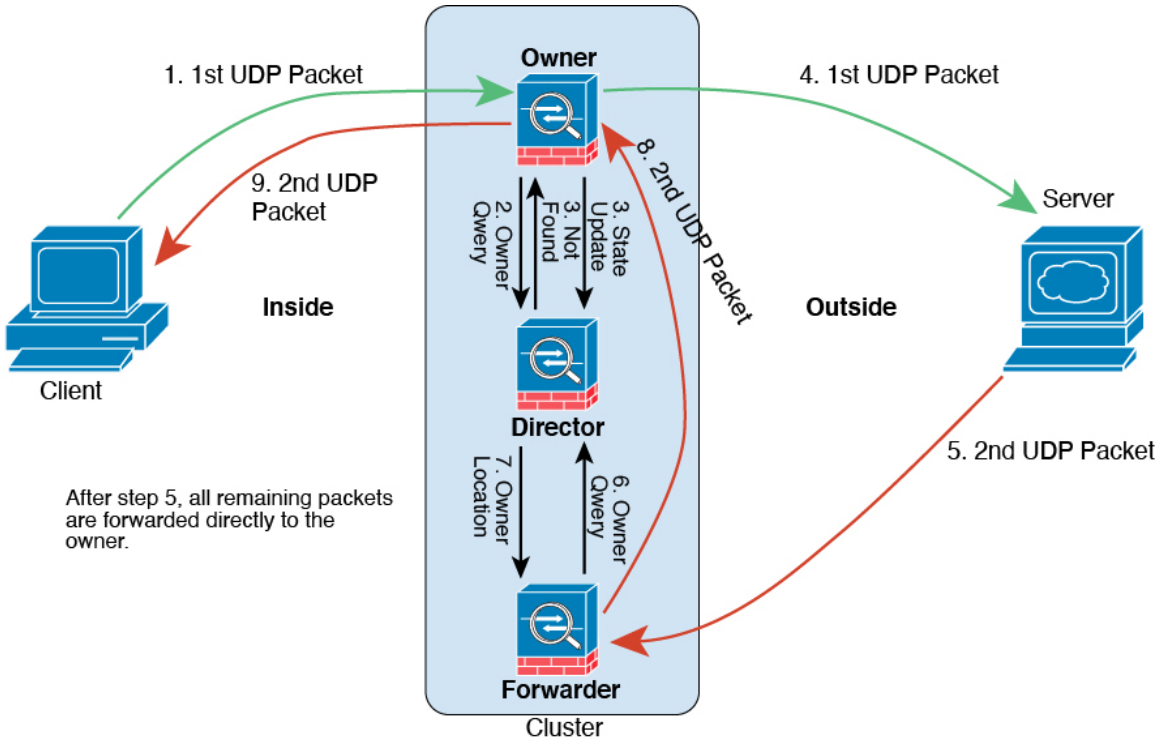


The first UDP packet originates from the client and is delivered to one threat defense (based on the load balancing method).

2. The node that received the first packet queries the director node that is chosen based on a hash of the source/destination IP address and ports.
3. The director finds no existing flow, creates a director flow and forwards the packet back to the previous node. In other words, the director has elected an owner for this flow.
4. The owner creates the flow, sends a state update to the director, and forwards the packet to the server.
5. The second UDP packet originates from the server and is delivered to the forwarder.

6. The forwarder queries the director for ownership information. For short-lived flows such as DNS, instead of querying, the forwarder immediately sends the packet to the director, which then sends it to the owner.
7. The director replies to the forwarder with ownership information.
8. The forwarder creates a forwarding flow to record owner information and forwards the packet to the owner.
9. The owner forwards the packet to the client.

# History for Threat Defense Virtual Clustering on Azure

***Table 7:***

| Feature | Min. Management Center | Min. Threat Defense | Details |
|---|---|---|---|
| Cluster control link ping tool. | 7.4.1 | Any | You can check to make sure all the cluster nodes can reach each other over the cluster control link by performing a ping. One major cause for the failure of a node to join the cluster is an incorrect cluster control link configuration; for example, the cluster control link MTU may be set higher than the connecting switch MTUs.<br>New/modified screens: **Devices** > **Device Management** > **More**(⋮) > **Cluster Live Status**<br>Other version restrictions: Not supported with management center Version 7.3.x or 7.4.0. |
| Troubleshooting file generation and download available from Device and Cluster pages. | 7.4.1 | 7.4.1 | You can generate and download troubleshooting files for each device on the Device page and also for all cluster nodes on the Cluster page. For a cluster, you can download all files as a single compressed file. You can also include cluster logs for the cluster for cluster nodes. You can alternatively trigger file generation from the **Devices** > **Device Management** > **More**(⋮) > **Troubleshoot Files** menu.<br>New/modified screens:<br>• **Devices** > **Device Management** > **Device** > **General**<br>• **Devices** > **Device Management** > **Cluster** > **General** |
| View CLI output for a device or device cluster. | 7.4.1 | Any | You can view a set of pre-defined CLI outputs that can help you troubleshoot the device or cluster. You can also enter any **show** command and see the output.<br>New/modified screens: **Devices** > **Device Management** > **Cluster** > **General** |

| Feature | Min. Management Center | Min. Threat Defense | Details |
|---|---|---|---|
| Cluster health monitor settings | 7.3.0 | Any | You can now edit cluster health monitor settings.<br>New/Modified screens: **Devices** > **Device Management** > **Cluster** > **Cluster Health Monitor Settings**<br>**Note**<br>If you previously configured these settings using FlexConfig, be sure to remove the FlexConfig configuration before you deploy. Otherwise the FlexConfig configuration will overwrite the management center configuration. |
| Cluster health monitor dashboard | 7.3.0 | Any | You can now view cluster health on the cluster health monitor dashboard.<br>New/Modified screens: **System** (⚙) > **Health** > **Monitor** |
| Clustering for the Threat Defense Virtual on Azure | 7.3.0 | 7.3.0 | You can now configure clustering for up to 16 nodes the threat defense virtual in Azure for the Azure Gateway Load Balancer or for external load balancers.<br>New/modified screens:<br>• **Devices** > **Device Management** > **Add Cluster**<br>• **Devices** > **Device Management** > **More** menu<br>• **Devices** > **Device Management** > **Cluster** |

© 2025 Cisco Systems, Inc. All rights reserved.



**Americas Headquarters**
Cisco Systems, Inc.
San Jose, CA 95134-1706
USA

**Asia Pacific Headquarters**
CiscoSystems(USA)Pte.Ltd.
Singapore

**Europe Headquarters**
CiscoSystemsInternationalBV
Amsterdam,TheNetherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.