


1. THE NW CORNER OF PARCEL 2, F90-6064 WAS ESTABLISHED AT DEEDED DISTANCE SOUTH ALONG THE SUBDIVISION LINE FROM W-NE 1/64 CORNER.
2. THE NORTHEAST CORNER OF PARCEL 2 WAS ESTABLISHED AT THE DEEDED BEARING AND DISTANCE FROM THE NW CORNER.
3. THE SOUTHEAST CORNER OF PARCEL 2 WAS SET AT THE DEEDED BEARING FROM THE NE CORNER AND AT A DISTANCE 30 FEET NORTH OF THE TRAVELED CENTERLINE OF THE COUNTY ROAD.
4. THE SOUTH LINE OF THE TRACT IS THE NORTH LINE OF THE COUNTY ROAD AS DETERMINED FROM THE TRAVELED CENTERLINE.
5. THE BOUNDARIES OF PARCEL 1 WERE ESTABLISHED AT THE DEEDED BEARINGS AND DISTANCES FROM THE POINT OF BEGINNING WHICH IS 756.36 FEET EAST OF THE CENTER OF THE SECTION.
6. THE SOUTHEAST CORNER OF THAT TRACT DESCRIBED IN F88-4037 WAS ESTABLISHED 60 FEET WEST OF THE EAST LINE OF THE NW 1/4 OF THE SE 1/4 AND 30 FEET NORTH OF THE TRAVELED CENTERLINE OF THE COUNTY ROAD
7. THE BASIS OF BEARINGS IS THE EAST-WEST CENTERLINE OF THE SECTION FROM RS # B-75
8. THE NE SECTION CORNER, N 1/4 CORNER AND S 1/4 CORNER LOCATIONS WERE HELD AS PER RS # B-75

- LEGEND  
 ● - MONUMENT FOUND AS NOTED  
 ○ - SET A 5/8" X 30" IR WITH A YELLOW PLASTIC CAP  
 MARKED "KEENON LS 1080"  
 IR - IRON ROD  
 IP - IRON PIPE  
 RS - RECORD SURVEY NO.  
 ( ) - RECORD DATA 1- RS  
 2=RS 3693  
 3=RS 3475  
 4=RS B-75  
 5=RS 3491  
 -X- FENCE  
 ● - NOT LOCATED OR TIED  
 L JERRY KEENON  
 1311 ALDER ST  
 VERNONIA, OREGON 97064  
 PH # 429-6115
- REGISTRY  
 PROFESSIONAL  
 LAND SURVEYOR  
 ORR  
 JULY  
 LESLIE G.  
 10862

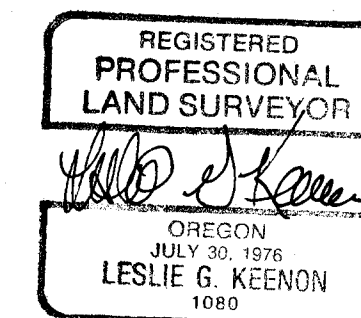

COUNTY SURVEYOR  
RECEIVED 7-24-92  
FILED 10-22-92