


A DEPENDENT RESURVEY for Weyerhaeuser Co. within  
the W.1/2 NW.1/4 of SECTION 7, T4N R4W, W.M.  
as situated within  
COLUMBIA COUNTY, OREGON  
February 25, 2018

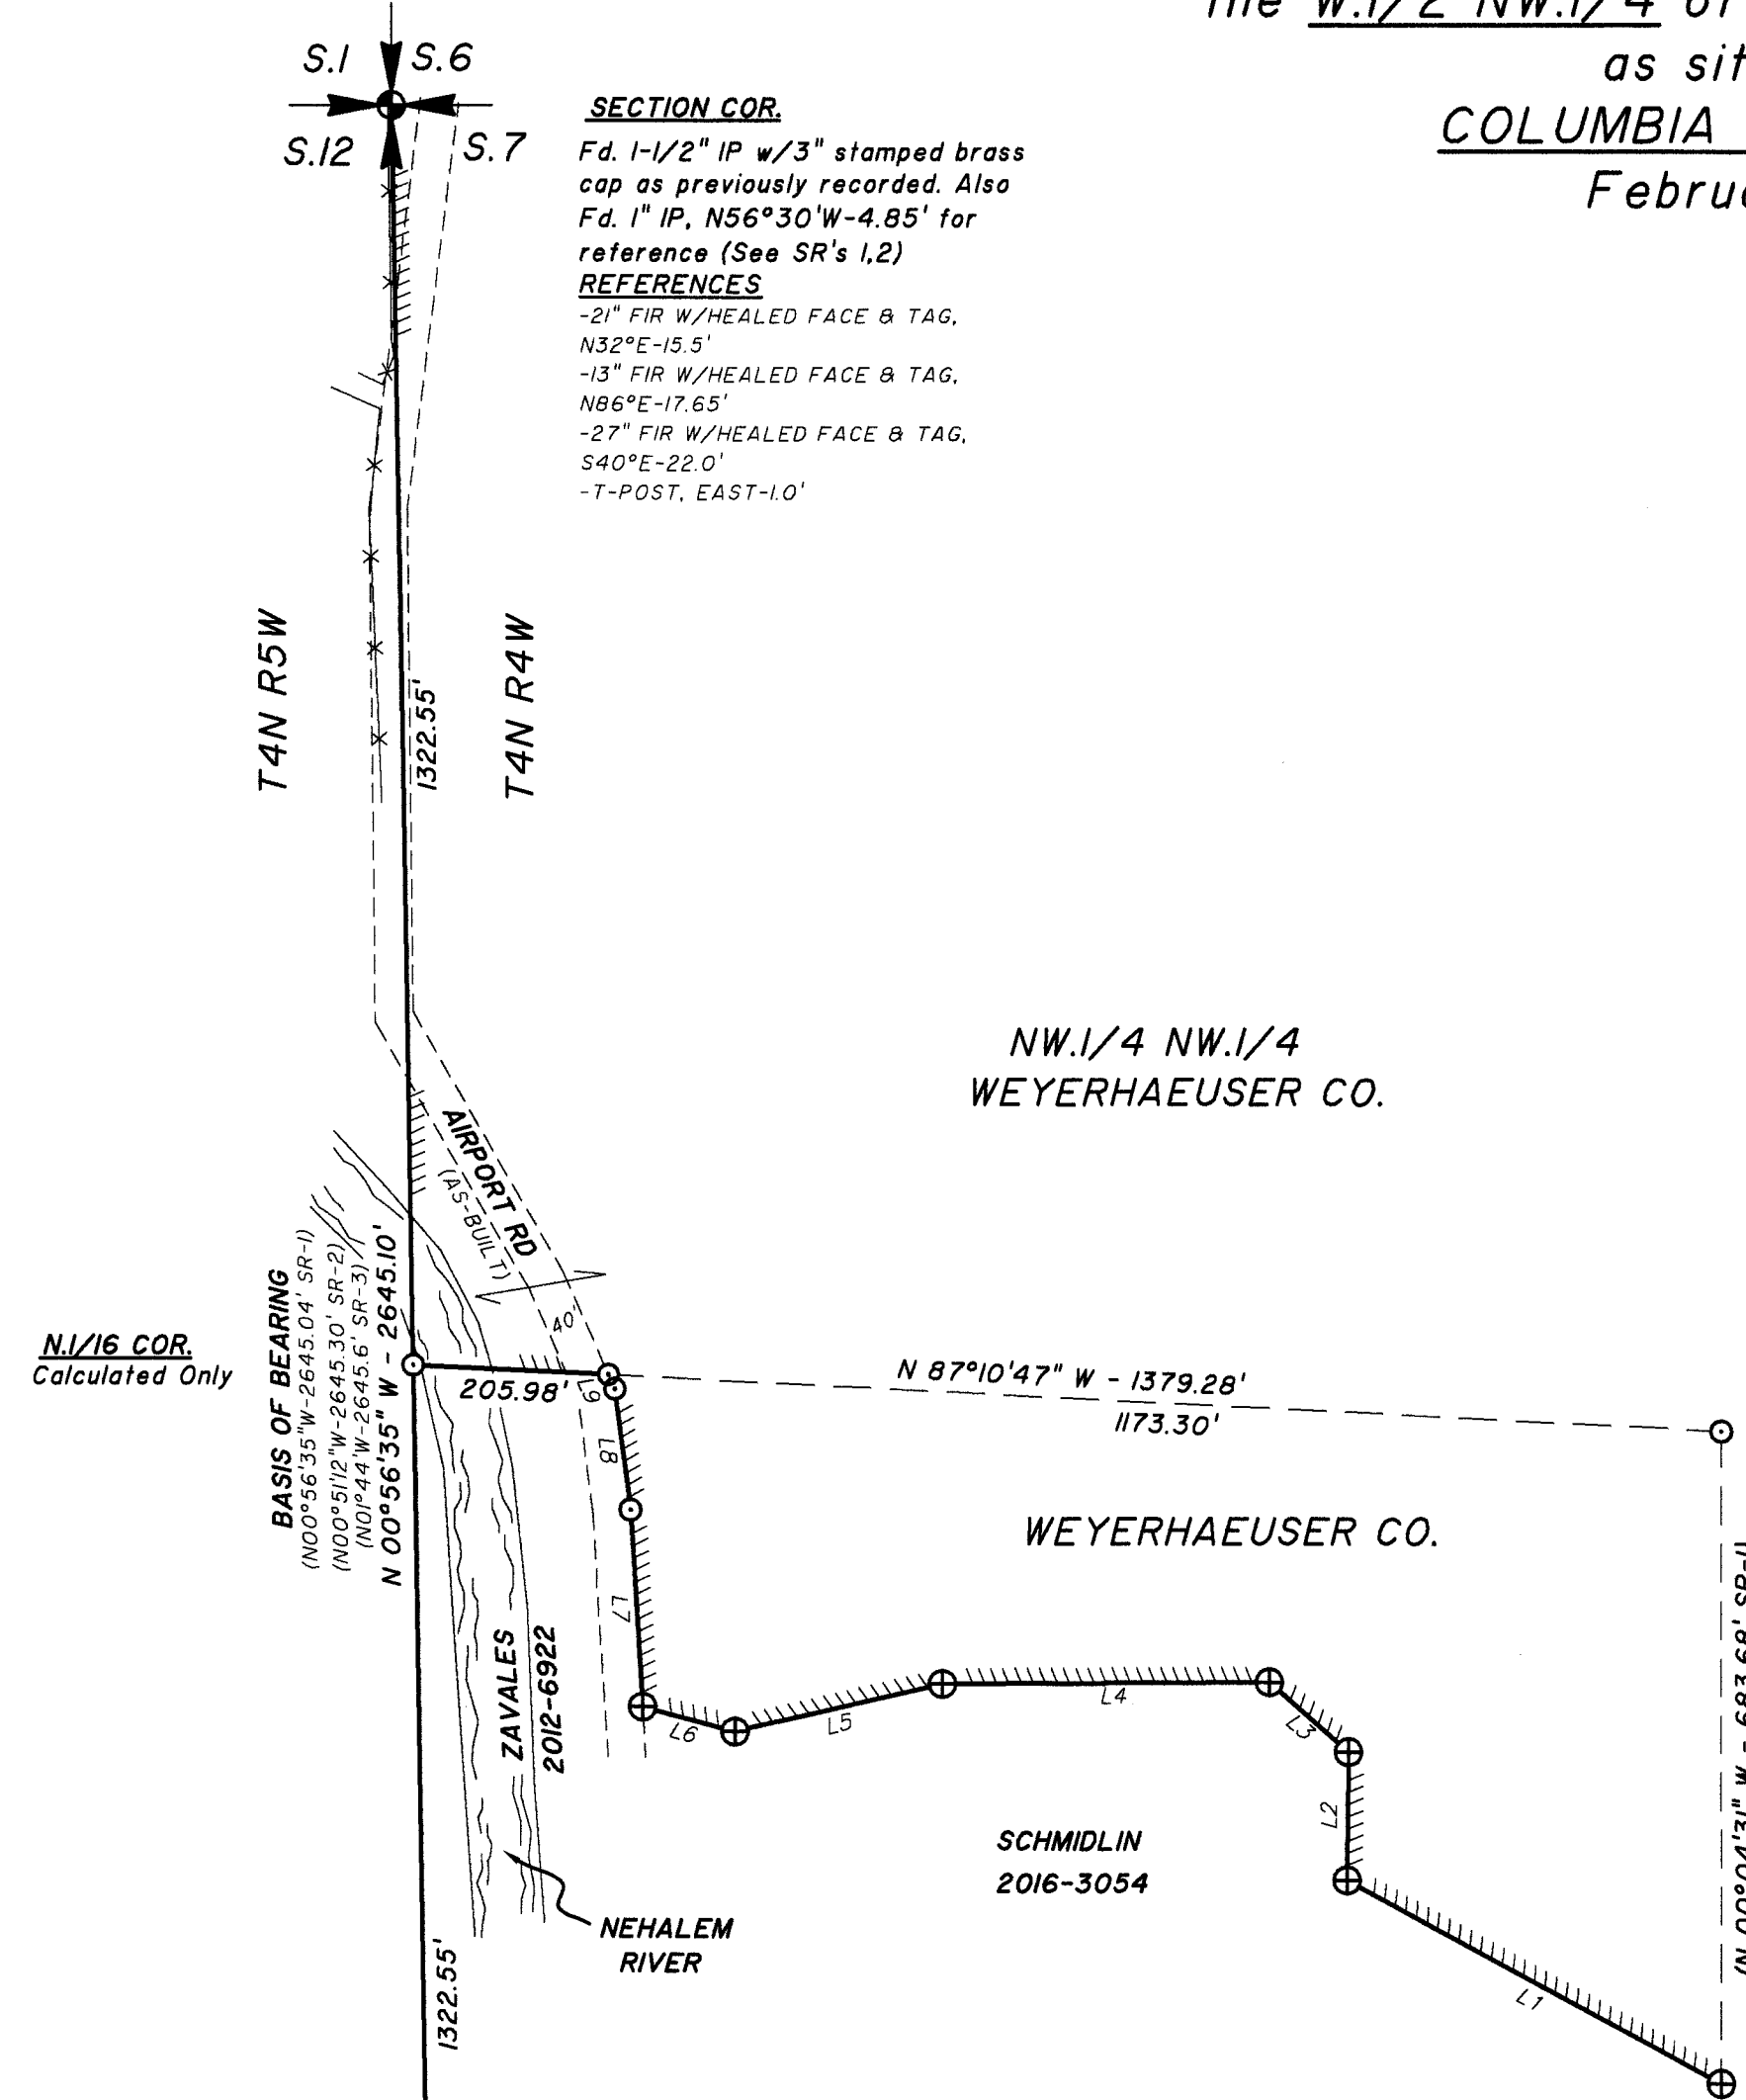

**SECTION COR.**  
Fd. 1-1/2" IP w/3" stamped brass cap as previously recorded. Also  
Fd. 1" IP, N56°30'W-4.85' for reference (See SR's 1,2)  
**REFERENCES**  
-21" FIR W/HEALED FACE & TAG,  
N32°E-15.5'  
-13" FIR W/HEALED FACE & TAG,  
N86°E-17.65'  
-27" FIR W/HEALED FACE & TAG,  
S40°E-22.0'  
-T-POST, EAST-1.0'

**NARRATIVE**

The purpose of this survey was to mark portions of Weyerhaeuser Company's ownership within the W.1/2 NW.1/4 of Section 7, T4 R4W, for timber removal. All of the corners shown hereon were either found or established during that certain survey by KLS Surveying, filed as CS #6110. These corners were all found to be very close to that of record and were all accepted for this survey. The Southwest corner of the NW.1/4 NW.1/4 (N.1/16 corner) falls in the Nehalem River. In 1996, KLS Surveying set a reference corner S.87°55'41"E -156.22 feet from said N.1/16 corner, as shown on their survey filed as CS #4206.

\*This survey was conducted using a "Leica TS06+ Total Station", obtaining a relative accuracy of over 1:10,000.

**BASIS OF BEARING**  
THE WEST LINE OF THE  
NW.1/4 OF SECTION 7  
PER SR-1

LINE	BEARING	DISTANCE	RECORD BEARING	RECORD DISTANCE	SR
L1	N 61°44'50" W	448.15'	(N 61°43'31" W	448.10')	SR-1
L2	N 00°33'47" E	134.61'	(N 00°31'29" E	134.50')	SR-1
L3	N 48°39'48" W	111.20'	(N 48°38'31" W	111.20')	SR-1
L4	S 89°36'57" W	344.43'	(S 89°37'29" W	344.40')	SR-1
L5	S 76°57'08" W	224.01'	(S 76°56'29" W	224.00')	SR-1
L6	N 75°08'29" W	100.66'	(N 75°10'31" W	100.65')	SR-1
L7	N 03°33'37" W	206.35'			
L8	N 07°20'53" W	128.32'			
L9	N 23°51'58" W	16.48'			

**SURVEY REFERENCES (SR)**

- 1) 2015 Survey by D. Wallace, LS-2601, CS# 6110
- 2) 1996 Survey by L. Keenon, LS-1080, CS# 4206
- 3) 1961 Survey by C. Wagner PE, CS# 1435

**LEGEND**


- ⊕ = A corner FOUND during this survey, as described.
- ⊕ = A corner FOUND during this survey, consisting of a 5/8" rebar w/yellow plastic cap stamped "KLS SURVEYING INC." (See SR-1)
- ⊙ = A corner calculated only--not set this survey
- ( ) = A Bearing and/or Distance of record
- IP = An Iron Pipe
- R/C = A rebar with stamped plastic surveyor's cap
- T-POST = A 6" steel fence post w/location tag
- SR [X] = Survey Reference No.
- ||||| = A line marked during this survey with 1/2" x 6' white fiber glass rods, painted blazes, and flagging.
- x-x- = Existing fence line


**1/4 COR.**

Fd. 2" IP w/2-1/2" stamped brass cap as previously recorded.  
(See SR's 1,2)

**REFERENCES**

- 23" FIR W/HEALED FACE & TAG,  
N60°E-56.5'
- 25" CEDAR W/HEALED FACE & TAG,  
S28°E-50.7'
- ALUM. POST W/TAG, NORTH-1.0'
- T-POST, SOUTH-1.0'



<p>REGISTERED PROFESSIONAL LAND SURVEYOR</p> <p><i>Calvin J. Hampton</i></p> <p>SIGNED: 4/24/2018</p> <p>OREGON DECEMBER 2, 1983 CALVIN J. HAMPTON 2069</p> <p>EXPIRES: 6/30/2019</p>	<p><b>HAMPSTUR CORPORATION</b></p> <p></p> <p>P.O. Box 368 Kelso, Washington 98626 Phone: (360) 423-8166</p>	<p>Calculated by : CJH</p> <p>Checked by : CJH/PRG</p> <p>Drawn by : TLG</p> <p>Completion date : 2/25/2018</p> <p>Field Book no. : PS-819</p> <p>Drawing No. : 18-611.DWG</p> <p>HAMPSTUR JOB no. : 18-611</p> <p>Sheet no. 1 of 1</p>
---	---	---