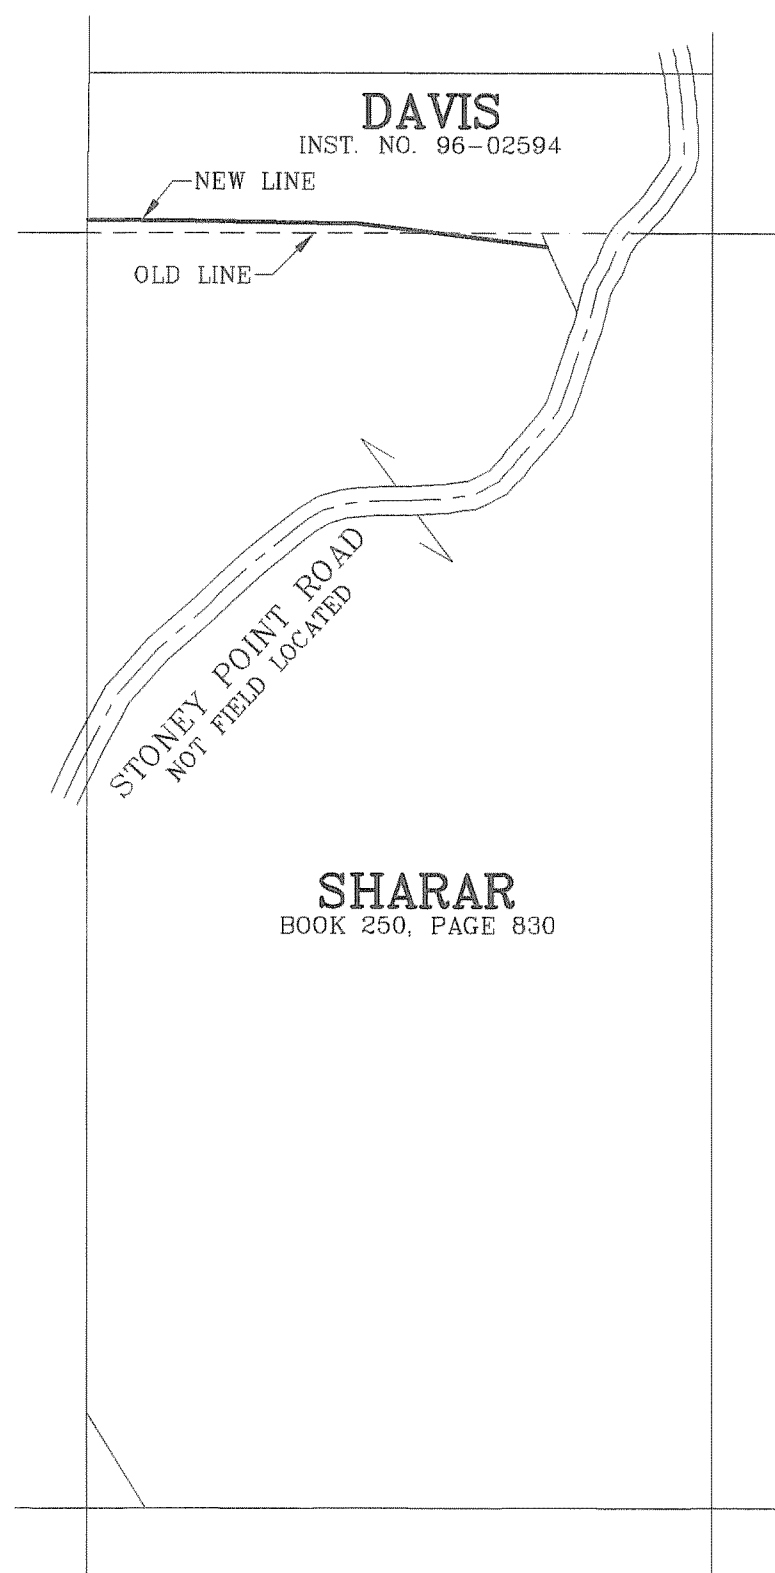


CS 5571



● = MONUMENT FOUND AS NOTED

○ = SET 5/8" X 30" IRON ROD WITH A Y.P.C.
MARKED "K.L.S. SURVEYING INC"

() = RECORD SURVEY DATA

[] = RECORD DEED DATA

CS NO. = RECORD SURVEY NUMBER

———— = WIRE FENCE LINE

1 = INST. NO. 96-02594
2 = BOOK 250, PAGE 830



1 = CS NO. B-5
2 = CS NO. 320
3 = CS NO. 3534
4 = CS NO. 3764

--THIS SURVEY WAS PERFORMED AT THE REQUEST OF GARY DAVIS TO MONUMENT A FUTURE PROPERTY LINE OF ADJUSTMENT BETWEEN THE DAVIS AND SHARAR TRACTS TO FOLLOW THE EXISTING FENCE LINE AS SHOWN HEREON.

--THE BASIS OF BEARING IS THE SECTION LINE COMMON TO SECTIONS 28 & 33 BETWEEN THE 1/4 CORNER AND THE EAST 1/16 CORNER PER CS NO. B-5. FOR CONTROL I HELD THE 1/4 CORNER AND EAST 1/16 CORNER.

--FOR THE NORTH-SOUTH CENTER OF SECTION LINE OF SECTION 28 I HELD THE RECORD ANGLE FROM THE SECTION LINE OF 89°29'22" PER CS NO. 3534.

--THIS PROPERTY LINE ADJUSTMENT IS NOT FINAL UNTIL THE PROPER DEEDS HAVE BEEN FILED.

<p>REGISTERED PROFESSIONAL LAND SURVEYOR</p> <p><i>Donald D. Wallace</i></p> <p>OREGON JANUARY 19, 1993 DONALD D WALLACE JR 2601</p> <p>RENEWAL DATE 6/30/10</p>	 <p>K.L.S. SURVEYING INC. 1224 ALDER STREET VERNONIA, OR 97064 (503)429-6115</p>	<p>PROPERTY LINE ADJUSTMENT SURVEY FOR</p> <p>GARY DAVIS</p> <p>IN THE SE 1/4 OF SECTION 28 & IN THE NE 1/4 OF SECTION 33, T5N, R4W, W.M., COLUMBIA COUNTY, OREGON</p> <p>SCALE 1" = 100' MARCH 20, 2008</p>	 <p>Received <u>8/4/08</u> Filed <u>8/20/08</u> CS# <u>5571</u></p>
<p>DRAWN BY: BTF</p>	<p>FIELD: TBM/TSM</p>	<p>EQUIPMENT: GTS300/TDS48 JOB No. 07-193 PROJECT No. 07-193</p>	<p>REVISED: 3/20/08</p>

CS 5571