


penn fan TM
INDUSTRIAL FANS

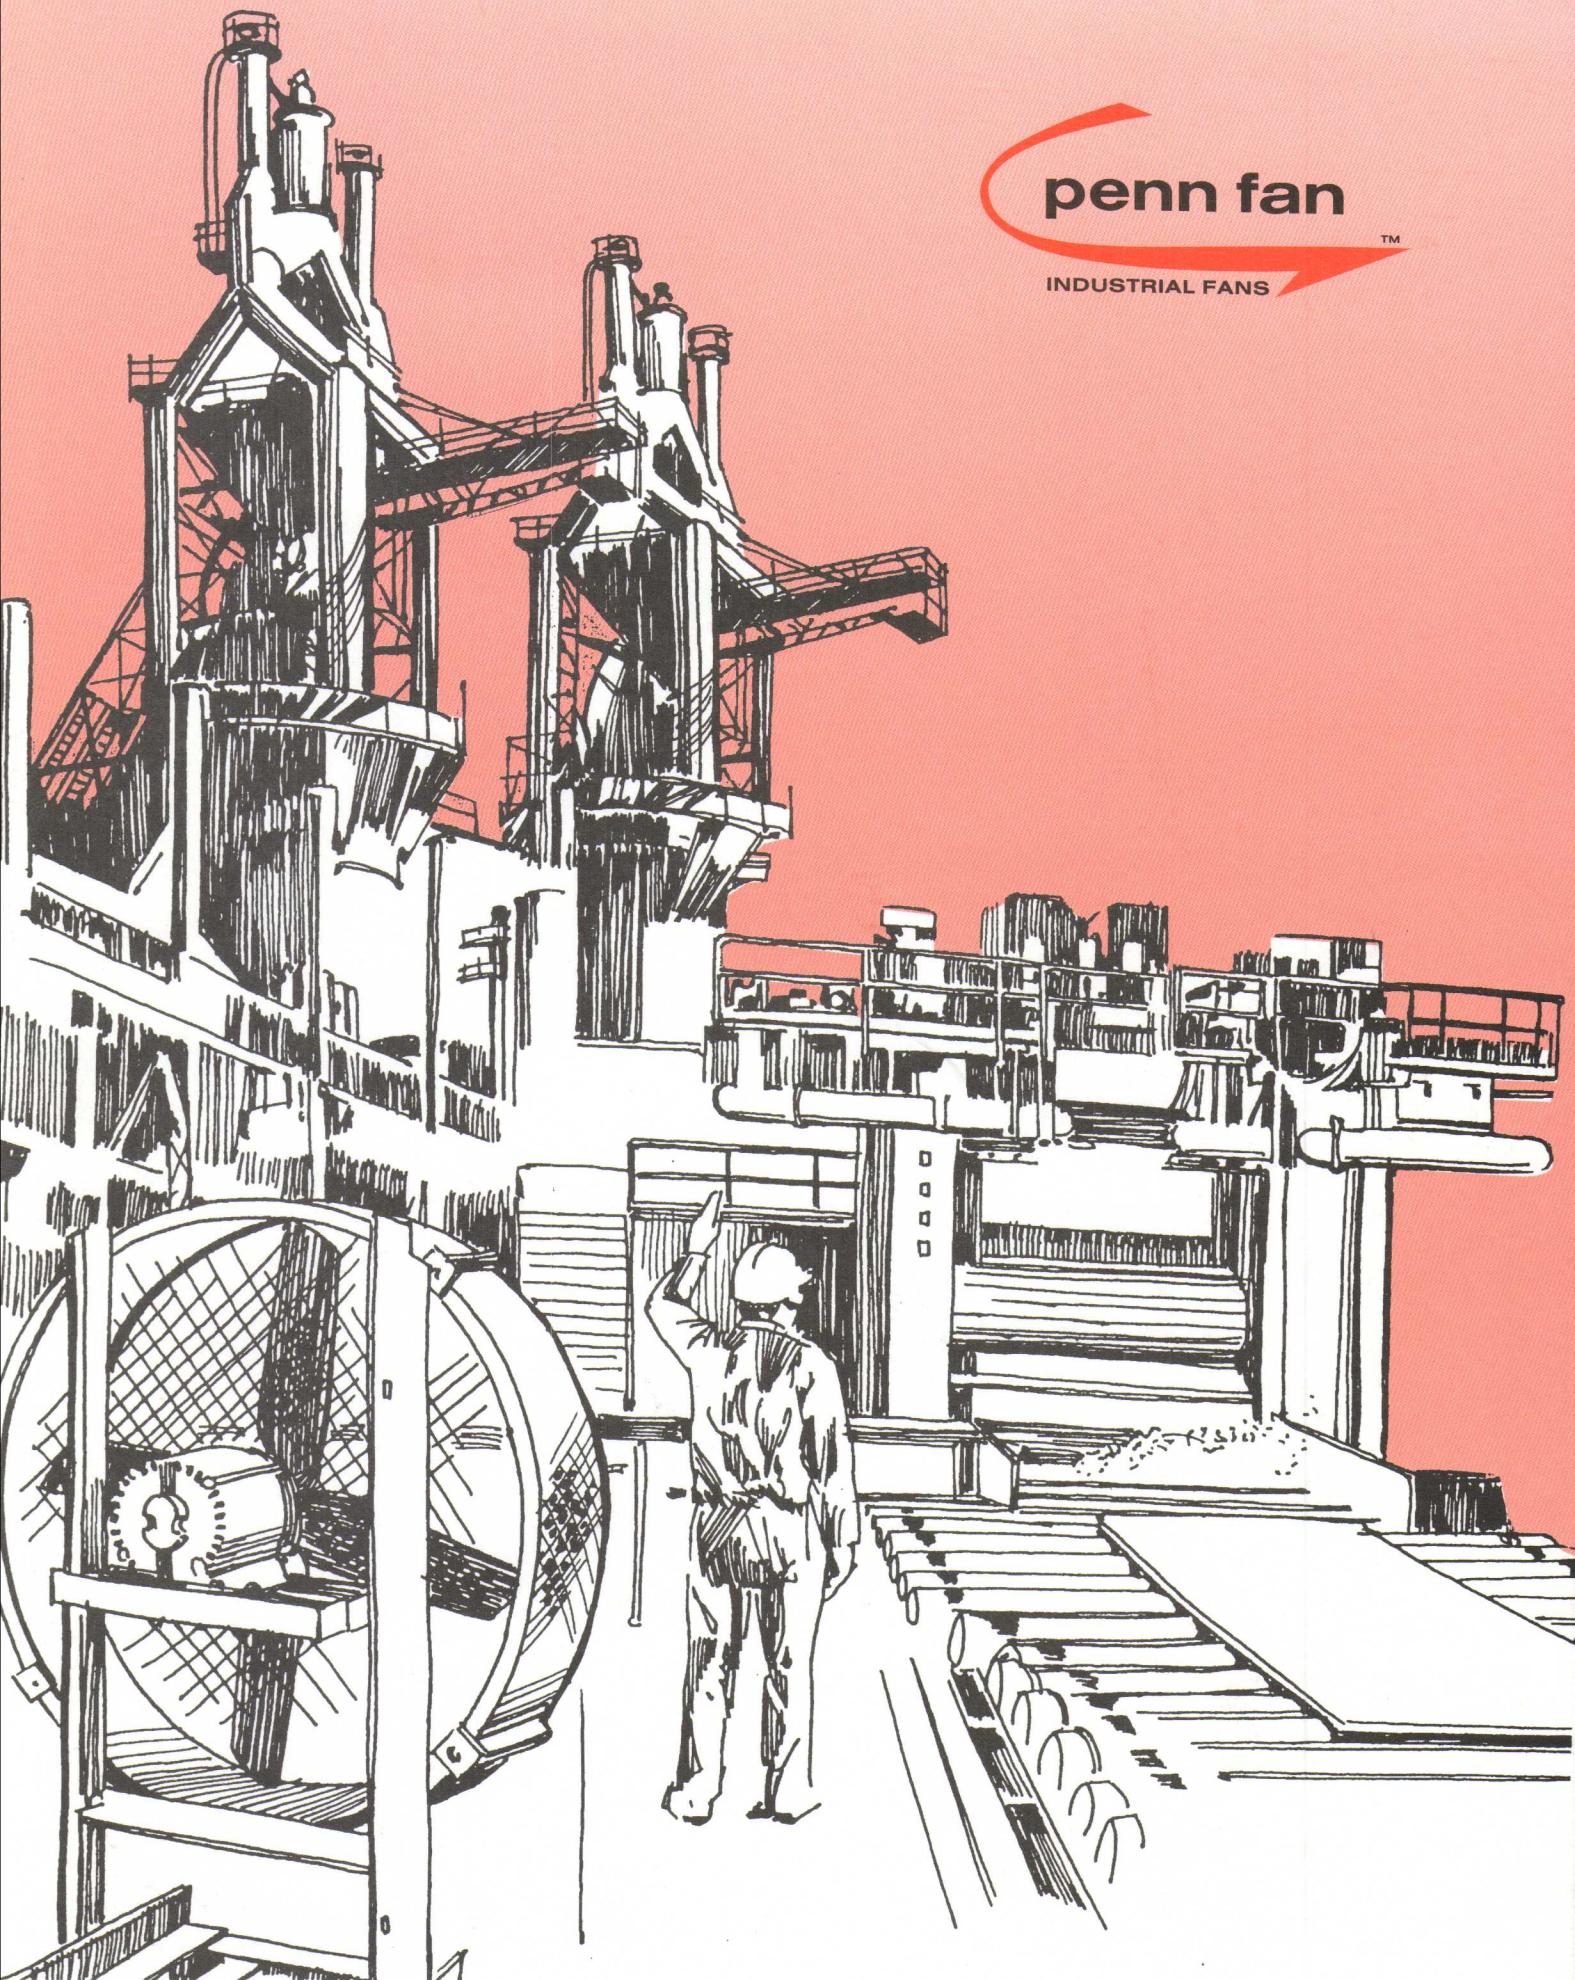

Safe, Durable, Efficient


For over 30 years Penn Fan has researched, developed and manufactured fans for industry. Our mancoolers, crane cab fans and exhaust units are products of the industry's finest laboratory testing and development program.

Along with conducting specialized research in the areas of performance and sound analysis, Penn Fan also offers engineering assistance to any of our industrial customers.

Because of this extensive research program, we can assure the reliability of each fan we design and build.

Penn Fan industrial fans give you advantages that include:

- **Superior Performance** – tested in accordance with the latest ASHRAE and AMCA standards.
- **Minimum Maintenance** – heavy duty, all-welded steel construction; all name-brand components; durable finish.
- **Low Noise Level** – propellers designed and engineered for reduced sound output.
- **Safe** – units meet or exceed all OSHA requirements; burnt orange enamel finish for high visibility.

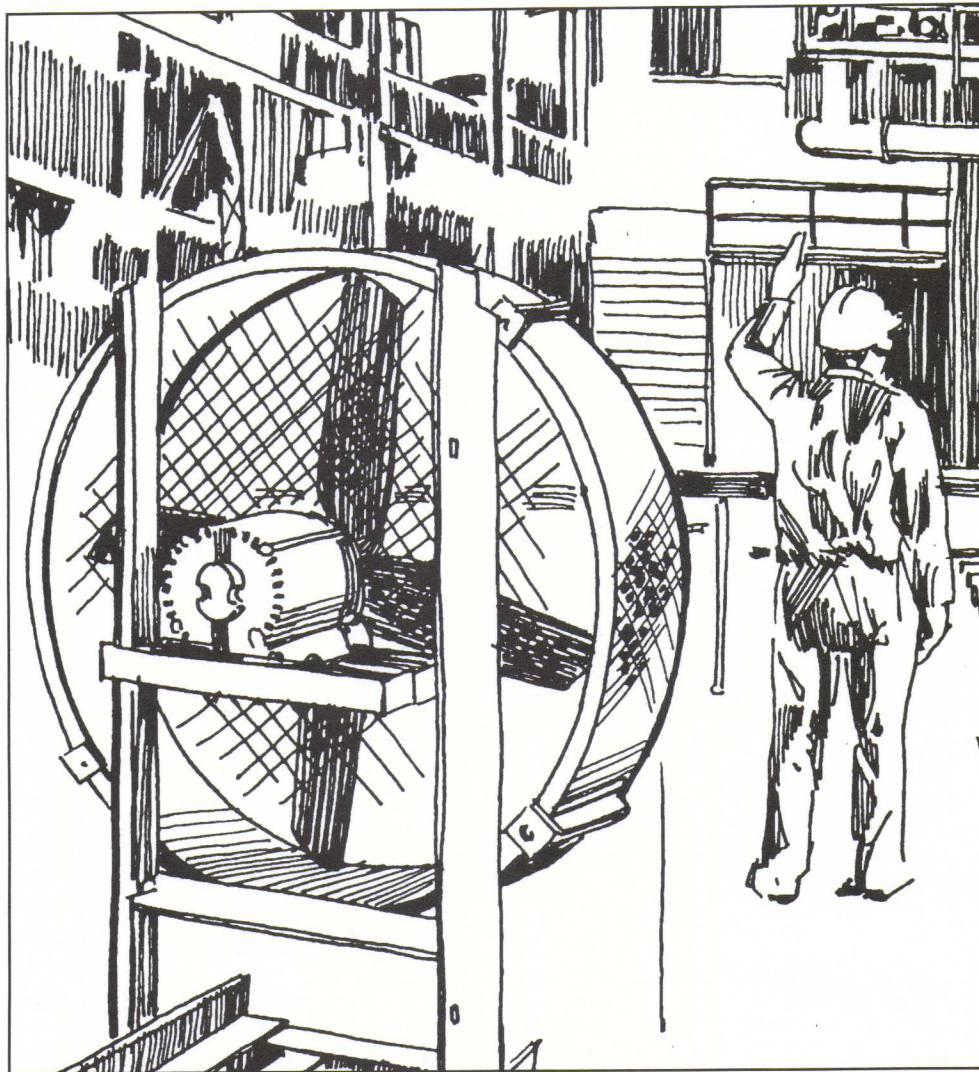

We put these benefits and more into every fan we build. Our engineering and production staff brings you decades of experience in manufacturing reliable, high quality cooling and ventilating units. At Penn Fan...safety, durability and performance standards are never too high.

Type D: Drum Style Mancoolers

Type D units offer the same wide range of cooling and ventilating applications as the popular type M, but with the added feature of greater air direction. This helps condition difficult to reach areas and provides even greater spot cooling of equipment and processing operations.

Performance

Size	Model No.	HP	RPM	CFM
24	D24B1	1	1750	7200
	D24B1.5	1.5	1750	8200
	D24B2	2	1750	9200
	D24B3/4X	3/4	1140	6600
30	D30B1.5	1.5	1750	11,000
	D30B2	2	1750	12,750
	D30B3	3	1750	15,500
	D30B1X	1	1140	11,000
	D30B1.5X	1.5	1140	12,500
36	D36B5	5	1750	25,100
	D36B2X	2	1140	17,000
	D36B3X	3	1140	20,000
	D36B5X	5	1140	24,900
42	D42B7.5	7.5	1750	30,000
	D42B3X	3	1140	23,500
	D42B5X	5	1140	28,000
	D42B7.5X	7.5	1140	32,500
48	D48B3X	3	1140	28,000
	D48B5X	5	1140	31,000
	D48B7.5X	7.5	1140	33,000

LEGEND

A = 250 Volt DC
 B = 230/460/3/60
 C = 115/230/1/60
 X = 1140 RPM
 Z = 850 RPM

OPTIONS

Fans come with standard "T" base
 4LA = 4 legs
 P = pedestal
 PS = pedestal swivel
 WC = with casters

Construction Detail

FANS WITH STANDARD "T" BASE OR WITH 4 LEGS

BASE	2" x 3" x 3/16" ANGLE
UPRIGHTS	2" x 3" x 3/8" ANGLE
LIFTING BAR	1" BAR
MOTOR MOUNT	1/4" PLATE
DRUM	3/16" OR 1/4" PLATE
GUARDS	0.135 STEEL MESH WITH 1/2" CLEAR OPENING

PEDESTAL DRUM UNITS

PIPE	3 1/2" DIAMETER WITH 1/4" WALL
PEDESTAL	24" - 30" DIAM., 1/4" THICK 36" OR LARGER - 36" DIAM., 1/4" THICK
LIFTING HOOK	1/4" x 2" STEEL

PEDESTAL SWIVEL UNITS

PEDESTAL	30" DIAM., 1/4" THICK
DRUM	10 GAGE STEEL
UPRIGHTS	4" x 1/4" THICK CHANNEL
MOTOR MOUNT	1/4" PLATE



Type M: Mancoolers

Type M units provide man cooling and process cooling for both open work areas and selective spot cooling. Its rugged construction equals that of a permanent fan, yet it can easily be positioned and adjusted for directional flow.

Performance

Size	Model No.	HP	RPM	CFM
24	M24B1	1	1750	7200
	M24B1.5	1.5	1750	8200
	M24B2	2	1750	9200
	M24B3/4X	3/4	1140	6600
30	M30B1.5	1.5	1750	11,000
	M30B2	2	1750	12,750
	M30B3	3	1750	15,500
	M30B1X	1	1140	11,000
	M30B1.5X	1.5	1140	12,500
36	M36B5	5	1750	25,100
	M36B2X	2	1140	17,000
	M36B3X	3	1140	20,000
	M36B5X	5	1140	24,900
42	M42B7.5	7.5	1750	30,000
	M42B3X	3	1140	23,500
	M42B5X	5	1140	28,000
	M42B7.5X	7.5	1140	32,500
48	M48B3X	3	1140	28,000
	M48B5X	5	1140	31,000
	M48B7.5X	7.5	1140	33,000

LEGEND

A = 250 Volt DC
 B = 230/460/3/60
 C = 115/230/1/60
 X = 1140 RPM
 Z = 850 RPM

OPTIONS

Fans come with standard "T" base
 4LA = 4 legs
 WC = with casters
 WM = wall mount
 TW = trolley wheels

Construction Detail

FANS WITH STANDARD "T" BASE

BASE	2" x 3" x 3/16" ANGLE
UPRIGHTS	24" - 1 1/2" x 3/16" ANGLE 30" OR LARGER - 2" x 3" x 3/16" ANGLE
LIFTING BAR	1/4" x 2" WIDE PLATE
MOTOR MOUNT	2" x 3" x 3/16" ANGLE
CAGE	1/2" NO. 13 EXPANDED METAL
GUARDS	0.135 STEEL MESH WITH 1/2" CLEAR OPENING
CASTERS	3" CASTERS

FANS WITH 4 LEGS

UPRIGHTS	2" x 3" x 3/8" ANGLE
MOTOR MOUNT	3/8" PLATE
CASTERS	8" DIAMETER WITH 1" AXLE, AND 6" DIAMETER CASTER



Type EX: Exhaust Fans

Type EX units are available in all sizes for all ventilating requirements. They are specially designed for maximum efficiency and quiet operation.

Performance

Size	Model No.	HP	RPM	Free Air	CFM		
					1/8 SP	1/4 SP	3/8 SP
12	EX12B1/4	1/4	1750	1500	1375	1225	900
14	EX14B1/4	1/4	1750	2200	2025	1875	1650
16	EX16B1/3	1/3	1750	2700	2600	2400	2150
18	EX18B1/3	1/3	1750	3350	3175	3000	2700
	EX18B1/2	1/2	1750	4000	3750	3600	3300
20	EX20B1/3	1/3	1750	3550	3350	3150	
	EX20B1/2	1/2	1750	4300	4125	3900	3700
	EX20B3/4	3/4	1750	5100	4900	4700	4500
24	EX24B3/4	3/4	1750	6650	6350	6050	
	EX24B1	1	1750	7650	7350	7050	6750
	EX24B1.5	1.5	1750	8700	8400	8100	7800
	EX24B3/4X	3/4	1140	7100	6650	6150	
30	EX30B2	2	1750	12,800	12,400	12,000	11,700
	EX30B3	3	1750	14,500	14,050	13,600	13,100
	EX30B3/4X	3/4	1140	8500	7700	7000	5900
	EX30B1X	1	1140	10,400	9700	8900	7800
	EX30B1.5X	1.5	1140	11,600	11,000	10,200	9150
36	EX36B5	5	1750	22,500	22,000	21,400	21,000
	EX36B2X	2	1140	16,300	15,400	14,500	13,600
	EX36B3X	3	1140	19,000	18,300	17,500	16,600
	EX36B5X	5	1140	22,500	21,500	20,500	19,500
42	EX42B2X	2	1140	18,800	18,000	17,300	
	EX42B3X	3	1140	23,000	22,400	21,700	20,800
	EX42B5X	5	1140	26,400	25,700	25,000	24,050
	EX42B7.5X	7.5	1140	30,300	29,900	29,300	28,800
48	EX48B5X	5	1140	32,000	31,200	30,300	28,600
	EX48B7.5X	7.5	1140	36,800	35,500	34,500	33,300
	EX48B3Z	3	850	27,750	26,100	24,700	23,050
	EX48B5Z	5	850	33,000	31,600	30,050	28,100
54	EX54B7.5X	7.5	1140	38,400	37,000	36,000	35,000
	EX54B10X	10	1140	45,000	44,050	43,000	42,000
	EX54B5Z	5	850	34,000	33,000	31,050	29,300
	EX54B7.5Z	7.5	850	42,000	40,000	38,000	36,500
60	EX60B5Z	5	850	41,200	38,800	36,900	
	EX60B10Z	10	850	55,000	53,050	51,300	49,500

LEGEND

A = 250 Volt DC
B = 230/460/3/60
C = 115/230/1/60

X = 1140 RPM
Z = 850 RPM

OPTIONS

S = with square intake guard
G = front exhaust guard

Construction Detail

PANEL	12" - 14" - 18 GAGE, 16" - 32" - 16 GAGE 36" - 54" - 14 GAGE, 60" - 12 GAGE
MOTOR MOUNT	1/4" STEEL
GUARDS	0.135 STEEL MESH WITH 1/2" CLEAR OPENING 1" x 1" x 1/8" ANGLE

Type C: Crane Cab Fans

Type C fans are ideal for cooling crane cabs, control booths, or any confined area. Wall or ceiling mounted in any position, they save space and provide pin-point cooling.

Performance

Size	Model No.	HP	RPM	Voltage	CFM
12	C12A	1/3	1750	250 DC	1500
	C12B	1/4	1750	230/460/3/60	1500
	C12C	1/4	1750	115/230/1/60	1500
16	C16A	1/3	1750	250 DC	2800
	C16B	1/4	1750	230/460/3/60	2700
	C16C	1/4	1750	115/230/1/60	2700
18	C18A	1/3	1750	250 DC	3400
	C18B	1/3	1750	230/460/3/60	3400
	C18C	1/3	1750	115/230/1/60	3400
20	C20A	1/3	1750	250 DC	3525
	C20B	1/3	1750	230/460/3/60	3525
	C20C	1/3	1750	115/230/1/60	3525
24	C24B1	1	1750	230/460/3/60	7600
	C24B1X	1	1140	230/460/3/60	7600
	C24C1	1	1750	115/230/1/60	7600
	C24C1X	1	1140	115/230/1/60	7600

LEGEND

A = 250 Volt
 B = 230/460/3/60
 C = 115/230/1/60
 X = 1140 RPM

OPTIONS

WM = wall mount
 TB = tripod base

Construction Detail


CAGE	1/2" NO. 13 EXPANDED METAL
GUARDS	0.135 STEEL MESH WITH 1/2" CLEAR OPENING
BASE	1/4" STEEL
MOTOR MOUNT	10 GAGE STEEL
HANDLE	3/8" STEEL ROD



C16A-TB



C16A

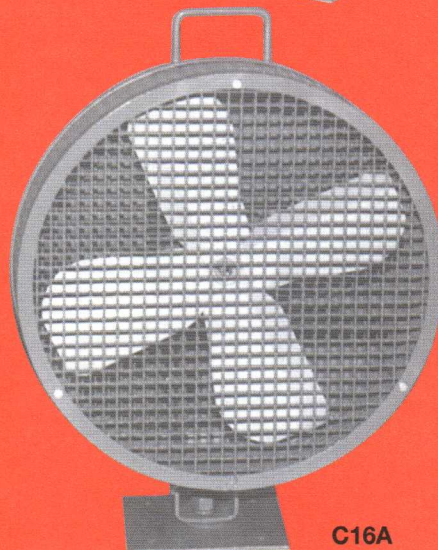

C16A



BOX 426
WARRENDALE, PA 15086-0426
Phone 724/452-4570
Fax 724/452-0961
www.pennfan.com

PENN FAN LIMITED WARRANTY

Penn Fan Company, the manufacturer, warrants that for a period of 1 year from date of purchase it will repair, or at its option replace, any new fan which proves defective in material or workmanship. All repairs and replacements shall be F.O.B. factory. All claims must be made in writing and approved by the manufacturer.


In no event and under no circumstances shall manufacturer be liable for (a) damages in shipment; (b) failures or damages due to misuse, abuse, improper installation or abnormal conditions of temperatures, dirt, water or corrosives; (c) failures due to operation, intentional or otherwise, and (d) non-authorized expenses for removal, inspection, transportation, repair or rework. Nor shall manufacturer ever be liable for consequential and incidental damages, or in any amount greater than the purchase price of the product.

This warranty is in LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING (BUT NO LIMITED TO) ANY IMPLIED WARRANTIES OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THE TERMS OF THIS WARRANTY CONSTITUTE ALL BUYER'S OR USER'S SOLE AND EXCLUSIVE REMEDY, AND ARE IN LIEU OF ANY RIGHT TO RECOVER FOR NEGLIGENCE, BREACH OF WARRANTY, STRICT TORT LIABILITY OR UPON ANY OTHER THEORY. Any legal proceedings arising out of the sale or use of this product must be commenced within 18 months of the date of purchase.

Reconditioning, Options & Accessories

We offer a complete reconditioning service on all makes and models of industrial mancoolers. Our services include general reconditioning (inspection, cleaning and painting), drum and cage reconditioning (repair or replacement of damaged assemblies), propeller and motor repair (including replacement of component parts), and replacement or restoration of all electrical components.

For more details, and a quotation, contact Penn Fan.

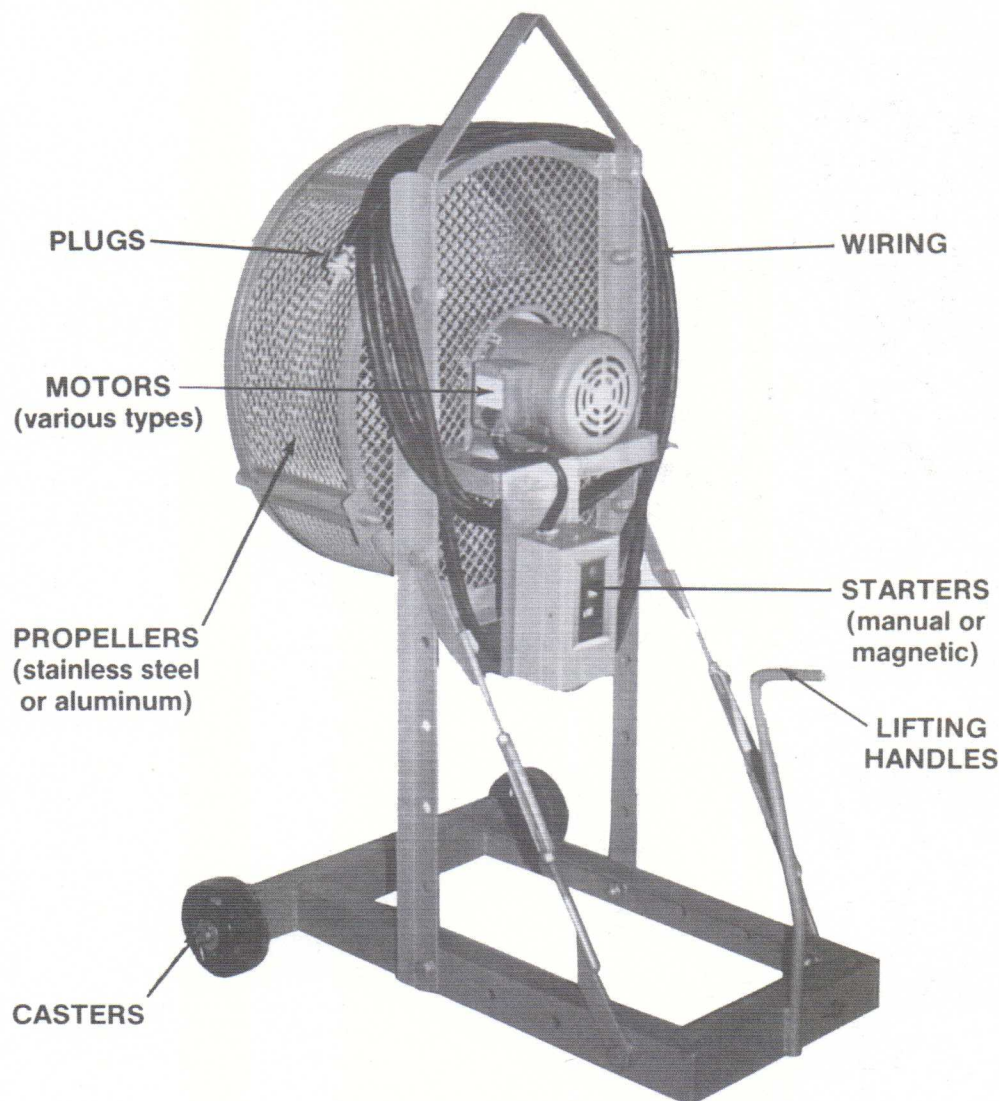

Ordering Information

The following is a breakdown of our model and code numbers. It indicates what component or accessory each number or letter represents. This information will help you in specifying the exact unit you need.

