1 2	A COMPREHENSIVE INVESTIGATION INTO RIDESOURCING COMPANY ACTIVITIES IN TORONTO
3	
4	
5	
6	Raphael Dumas
7	Big Data Innovation Team, City of Toronto Transportation Services
8	703 Don Mills Rd., North York, Ontario, Canada M3C 3N3
9	raphael.dumas@toronto.ca
10	
11	Chenchong Charles Zhu
12	Big Data Innovation Team, City of Toronto Transportation Services
13	703 Don Mills Rd., North York, Ontario, Canada M3C 3N3
14	charles.zhu@toronto.ca
15	
16	Jesse Coleman
17	Big Data Innovation Team, City of Toronto Transportation Services
18	703 Don Mills Rd., North York, Ontario, Canada M3C 3N3
19	jesse.coleman@toronto.ca
20	
21	Rick Liu
22	Department of Civil & Mineral Engineering, University of Toronto
23	35 St. George Street, Toronto, Ontario, Canada M5S 1A4
24	rick.liu@mail.utoronto.ca
25	
26	Natalie Chan Ho Man
27	Big Data Innovation Team, City of Toronto Transportation Services
28	703 Don Mills Rd., North York, Ontario, Canada M3C 3N3
29	natalie.chan@toronto.ca
30	
31	Aakash Harpalani
32	Big Data Innovation Team, City of Toronto Transportation Services
33	703 Don Mills Rd., North York, Ontario, Canada M3C 3N3
34	aakash.harpalani@toronto.ca
35 36	
37	Word Count: XXX
38	Word Count. AAA
39	
40	
41	
42	
43	
44	Submission Date: January 8, 2020

#### ABSTRACT

We present a comprehensive study of how the introduction of ridesourcing companies such as Uber and Lyft has changed travel patterns and behaviours in the City of Toronto. Origin-destination data for nearly 100 million trips between 2016 and 2019 were analyzed to determine spatial and temporal trends for ridesourcing activity. These data were combined with car travel time, public transportation network and city bylaw data to investigate the impact of ridesourcing on the transportation network, public transit and cyclists. To determine the fraction of total City vehicle kilometres travelled (VKT) due to ridesourcing vehicles, we routed individual trips, and linked trip drop-off points with nearby pick-up points to simulate driver deadheading between trips. We find a three-fold growth in the total number of trips per day, with the greatest absolute growth situated 10 in downtown Toronto during Friday and Saturday evenings. The greatest fractional growth, on the 11 other hand, is in weekday commuter trips in the suburbs. A conservative estimate of ridesourcing vehicle volumes show they account for  $\sim 5-8\%$  of overall daily VKT in September 2018, roughly a factor of two increase from October 2016. Over a similar period we find only marginal changes in travel time on downtown Toronto streets. We analyze curbside pick-up and drop-off data to 16 demonstrate a need to study further how to improve curbside operations to improve safety.

18 % Keywords: ridesourcing, Uber, Lyft, big data, regulation, shared mobility, policy analysis

#### 9 INTRODUCTION

17

33

36

38

39

40

41

42

43

The growth of ridesourcing companies (alternatively ride-hailing companies or transportation net-20 work companies (TNCs)) such as Uber and Lyft across North American cities over the past decade 21 has led to enormous and rapid changes in travel behavior. In March of 2019, an average of 770,000 ridesourcing trips were performed daily in New York City (1) and 330,000 in Chicago (2). Despite its prevalence, how ridesourcing contributes to congestion, impacts other road users, interacts with public transportation and affects transportation equity all remain topics of active debate amongst researchers, city planners and policy-makers. This is in part because details and data records of 26 ridesourcing company operations are generally kept private, forcing researchers to use novel means 27 of collecting them, such as scraping vehicle position data using APIs provided by the companies 28 (Cooper et al. (3)) or even driving for the companies themselves (Henao and Marshall (4)). Con-30 sequently, cases where companies volunteer disaggregated trip data or submit it for regulation (eg. Ride Austin (5); companies in New York City (6)) make for unique opportunities to build comprehensive pictures of how they operate within a city. 32

Uber first started offering its UberX service in Toronto, Canada, in September 2014. In response to growth in ridesourcing activity, in July 2016, the City of Toronto amended the Vehicle-for-Hire (VFH) Bylaw (7) that regulates taxis and limousines to enable ridesourcing services to operate in the city by September 2016. This bylaw requires ridesourcing companies to report individual trip origin-destination (OD) data to the city. Lyft followed Uber into the Toronto market at the end of 2017.

In 2018, the City undertook a comprehensive review of the bylaw, which included a study on the transportation impacts of ridesourcing in Toronto. The study, a collaboration between the Big Data Innovation Team within the City of Toronto's Transportation Services Division and the University of Toronto Transportation Research Institute (UTTRI), was published in June 2019 (8).

This paper is a companion article to the study, and will summarize its most important findings regarding congestion impact and curbside impacts. A critical dataset for understanding

localized congestion impacts was not provided to the City by ridesourcing companies: the volume

- 2 of vehicles on streets. We therefore developed a novel process to estimate volumes by routing
- 3 ridesourcing passenger trips and modelling driver behaviour between those trips. Detailing and
- 4 validating this process will be the primary focus of the methodology. Research conducted by
- 5 UTTRI for this study are detailed in other TRB submissions including a travel behavior survey
- 6 (9), a study on transit alternatives to ridesourcing (10), a regression on transit ridership (11), and a
- 7 ridesourcing service provision model (12).

#### 8 Literature Review

- 9 Transportation agencies have historically operated with limited data on ridesourcing companies'
- 10 operations. The San Francisco County Transportation Authority (SFCTA) performed their study
- 11 by scraping data from the APIs of Uber and Lyft, a technique which is unlikely to ever be replicated
- 12 because these companies have since restricted this access (3). By comparing traffic speeds with
- 13 a traffic model with and without the presence of ridesourcing companies in San Francisco, they
- 14 determined that 30% of the increase in congestion can be attributed to ridesourcing vehicles (13).
- 15 New York City has conducted multiple studies on the congestion impacts of ridesourcing: in 2016
- 16 finding that while ridesourcing operations contributed to congestion, other factors had contributed
- 17 more to recent speed decreases in Manhattan (14). In 2019, a study using video data collection
- 18 found that ridesourcing companies make up 30% of vehicle miles travelled (VMT) in downtown
- 19 Manhattan (6). Cities such as New York City, Chicago, and Sao Paulo are now requiring detailed
- 20 trip record data. Our study is the first based on OD trip records provided to a City, and the first to
- 20 trip record data. Our study is the first based on OD trip records provided to a City, and the first to
- 21 examine in detail such a long period of growth in ridesourcing trips.

#### 22 **METHODS**

23 This section describes our sources of data and our data reduction methods.

#### 24 Data Sources

26

27

28

29

30

31 32

33

34

3536

37

38

39

40

41

42

- 25 The study relied primarily on seven data sources:
  - **Ridesourcing trip records:** ridesourcing companies submit individual trip records to the City, including origin, destination, request and pick-up timestamps, ride duration, distance, type of service (wheelchair-accessible, Uber XL, etc.), ridesplitting trip segment ID, and trip status whether the trip was cancelled by either driver or passenger. Origin and destination locations are snapped to the nearest intersection in the City's street centreline dataset (15). Records from September 7, 2016 to September 30, 2018, were made available. After March 30, 2017, request time and trip status were no longer available in trip records, and pick-up timestamps were truncated to the nearest hour. Aggregate records for late 2018 and 2019 were also provided.
  - Supplementary aggregate ridesourcing statistics: by our request, a subset of ridesourcing companies provided additional information including the number of active drivers per hour for selected days, average fraction of VKT while in-service and while deadheading aggregated over all vehicles in March 2017 and September 2018, and additional aggregated wait time data after April 2017.
  - Ridesourcing pick-up and drop-off data: pick-up and drop-off counts at a 10m resolution significantly more precise than the trip record OD data were acquired using SharedStreets (16) as a broker in partnership with ridesourcing companies. The data is

- aggregated by hour and spans a total of 9 weeks from January to September 2018.
  - **Historical travel speed data:** travel speed data from September 2016 October 2018 was provided by HERE Technologies for all available street segments; data represents the mean speed along road segments for 5-minute increments. Speed data from October 2017 March 2019 was also acquired from the City's system of Bluetooth sensors along downtown arterial streets. This data is also in 5-minute increments, for road segments that span between major intersections. The HERE data covers the entire city and is used to estimate historical street network travel times.
  - 2016 Transportation Tomorrow Survey (TTS): the TTS is a regional household travel survey conducted by the University of Toronto in collaboration with local and provincial government agencies. The survey collects demographic, travel behavior and travel mode information. The most recent survey was in 2016.
  - Ridesourcing travel behavior survey: a survey was undertaken by UTTRI in May 2019 to collect information from a market research panel on their revealed and stated transportation mode preferences for commute and non-commute trips. The survey's authors discuss their work in Loa et al. (9).
  - Street-linked vehicle volumes: the output of the 2016 KCOUNT model described in Reddy et al. (17) are Annual Average Daily Traffic (AADT) volumes mapped to the City's street centreline network.
- Trip records, pick-up/drop-off data and historical speed data were hosted on a PostGIS geospatial object-relational database (running on PostgreSQL 9.6) (18, 19).

#### 22 Methodology for Processing Curb Activity

2

3

4 5

6

7

8

9

10

11

1213

14

15

16 17

18

19

29

30

32

33

35

36

37

39

40

41

- 23 Pick-up/drop-off (PUDO) data was provided with SharedStreets reference IDs. The city's bikelane
- 24 network was map-matched to the SharedStreets network using their street segment matching toolkit
- 25 in order to aggregate activity by bikelane segment (20).

#### 26 Methodology for Estimating Vehicle Volumes on Streets

- As described in Henao and Marshall (4), ridesourcing drivers cycle between three phases when serving multiple trips over their work period:
  - 1. Cruising while waiting to be matched with a passenger;
  - 2. Driving **en-route** to a pick-up once matched; and
- 3. Driving **in-service** of the passenger.

Cruising and driving en-route are both forms of *deadheading* (driving without a passenger). At the beginning and end of the work period, the driver may also "commute" - deadhead from and to another location such as a residence or place of work. All of these behaviours contribute to VKT on streets.

The ridesourcing trip records include the in-service VKT, but not deadheading VKT, nor were vehicle IDs or disaggregated wait times available. In order to localize in-service VKT to specific areas of Toronto, we modeled the likely paths drivers took from origin to destination for in-service activity. To estimate time and VKT spent deadheading, we also linked the destinations of trips with the origins of subsequent trips in such a way that best reproduces the empirical distribution of passenger wait-times, and modeled the likely paths drivers took to complete these

1 connections.

14

15

16

17

18

19 20

21

22

23

2425

26

2728

29

30

3132

33

34

3536

37

38

39

40

41 42

43

Due to the computational demands of this process, it was used on data from two days out of the study period: October 20, 2016 with 64,800 trips and September 13, 2018 with 140,900 trips, both of which are within 8% of the average daily number of trips in their respective months, and thus are representative of typical days near the beginning and end of the study period. As request data was only available before April 2017, October 20 was also used for testing, calibration and validation.

- 8 Trip Routing for In-Service Activity
- To estimate in-service trip trajectories, we routed each trip from origin to destination using pgRouting (21), a PostGIS (19) implementation of Dijkstra's Shortest Path algorithm. Trips were routed through a street network weighted using HERE travel speed data for the 5-minute period in which trips started. Gaps in traffic data were filled in by using data models provided by HERE for each street segment by time of week.

Our routing methodology was:

1. **Generate a routing network:** for each five-minute bin, we joined historical traffic data for that time with models for that day of week, 15-minute period and link provided by HERE. Link IDs were duplicated for bidirectional streets and re-drawn in the direction of travel. Source and target nodes for each link were also corrected to the direction of travel. The network mostly accounts for access restrictions and differences in road elevation but does not account for turn restrictions at intersections. The city's centreline network, to which vehicle volumes are mapped, was map-matched to the HERE network used for routing using the SharedStreets (20) toolkit in order to ensure similar streets networks were used to calculate ridesourcing VKT as a proportion of total City VKT.

# 2. Prepare trip records for routing:

- a. **Trips within Toronto:** for each trip record, the nearest node was found in the routable HERE network. These were typically the exact same intersections.
- b. **Trips to/from outside of Toronto:** for trip records where the origin or destination was outside the city but within the six nearest municipalities, the node was assigned to be a Toronto intersection on that municipality's border representative of a major arterial or highway. Trips from or to beyond the six nearest municipalities (representing 0.3% of all trips) were excluded from routing.
- c. **Generate Shared Ride Segments:** Ridesplitting trips where several trips with different origins and destinations are served simultaneously by one vehicle were re-ordered into segments representing stops the ridesourcing driver would have made in chronological order.
- d. **Impute Timestamps:** Trip record timestamps after March 30, 2017 were shifted to the start of the hour (for example 2018-09-13 07:47:00 becomes 2018-09-13 07:00:00). For these, we imputed more precise pick-up timestamps by randomly sampling from other pick-ups within a one kilometer radius for the same date and hour from trip records provided to us separately by a ridesourcing company. The drop-off timestamp was then calculated from the duration of the trip provided at a minute resolution.
- 3. Route trip records: five-minute batches were sent to a many-many Dijkstra routing

engine with the network for that time period in batches of 250 unique origins and their corresponding destinations (due to memory limitations). The routing engine returns the shortest path for each OD pair given traffic conditions at that time.

4. **Determine volumes on streets:** vehicle volumes over a period of time were calculated for each segment of the routing network by summing up the number of paths that include the segment during this period. The corresponding total VKT was determined by multiplying the vehicle volume by the segment length. Neighbourhood ridesourcing VKT was then factored by the ratio of aggregate routed distance and the network distance of reported trips for the entire city.

10 Our code for routing trips is available at https://github.com/CityofToronto/bdit\_triprouter.

#### Trip Linking for Deadheading

There is a paucity of information in the trip records concerning any of the phases of deadheading – commuting, cruising or en-route driving.

Without vehicle trajectories, predicting driver behavior while cruising is quite difficult, since there are many actions they could take. Anderson (22) and Henao and Marshall (4) report some drivers pull over while others circle in place or drive over to areas they deem lucrative. Ridesourcing companies use dynamic pricing to balance their vehicle supply with demand, partly from incentivizing their drivers to move to high-demand areas through these higher prices (23, 24). Dynamic pricing will heavily affect cruising behaviour, but details of their implementation and effectiveness are not publicly disclosed. Meanwhile, it is extremely difficult to quantify ridesourcing drivers commuting, since they may have their ridesourcing driving app turned off, and may also incorporate travel they would had done independent of their ridesourcing work.

In order to estimate deadheading, then, we make the simplifying assumption that drivers immediately pull over after dropping off their previous passenger, and once matched with a new passenger drive over to their pick-up via the shortest travel-time route. We then can route en-route travel with the same algorithm used to route in-service trips. This ensures we have a conservative estimate for VKT during deadheading. We also do not consider the additional time required for the ridesourcing company to match drivers and passengers, or the time between drivers arriving at a passenger pick-up point and the start of the trip, as these cannot be effectively estimated from the trip records.

To connect trips together into sequences, a process we refer to as "trip linking", we adopt the methodology of Vazifeh et al. (25) and Hanna et al. (26). Both cast the problem of assigning drivers to trips as finding a solution on a bipartite graph of feasible connections between the two groups. Feasible connections are found by calculating travel times between driver positions and trip pick-up points, and keeping those that are smaller than some limit  $\delta$ . In particular, Vazifeh et al. forgo explicitly modeling vehicles by finding feasible connections between trip drop-offs and subsequent trip pick-ups by checking if the en-route travel time between them is shorter than both the time between drop-off and pick-up as well as  $\delta$ . They then select a set of feasible connections such that each drop-off is connected to at most one pick-up. They interpret sequences of connected trips – "paths" – as sequences of trips serviced by an individual driver. Because every path (including ones with only one trip) must be serviced by a driver, the size of the vehicle fleet is an outcome of their model and does not need to be specified. Moreover, while only en-route time is utilized to determine feasibility, the time between drop-off and pick-up must be equal to both the

1 en-route and cruising times, so this methodology also outputs a cruising time estimate.

 We adopt Vazifeh et al.'s notation and methodology. In particular, we implement their "batch" methodology, which breaks V into sub-graphs representing short periods of time  $t_{\text{batch}}$ :

- 1. Generate a dataset of feasible links: we first converted trip records into a set of feasible connections from trip drop-offs to pick-ups over a 24 hour period. Feasible connections were found by binning drop-off points into five-minute intervals. For each drop-off, up to 30 of the closest pick-up points of trips beginning within the subsequent 20 min and 5 km are found (values chosen to make the calculation computationally tractable on our database system). The set of all drop-offs were then routed to the set of all pick-ups using the trip routing procedure from above. All routes that take longer to travel than the time difference between the drop-off and pick-up were discarded. The remaining routes represent feasible links between drop-offs and pick-ups, with a maximum en-route travel time  $\delta \approx 20 \, \text{min}$ .
- 2. Transform the feasible links into a graph V(N,E): the feasible links were then transformed into a directed acyclic graph V(N,E) where nodes  $N = \{n\}$  represent trips and edges  $E = \{e\}$  represent the feasible connections, whose weights are the en-route travel times from Step 1. We define a path P in V(N,E) to be a sequence of edges that connect a sequence of nodes together such that no node has more than two adjacent edges belonging to the path; these represent the trips taken over a driver's work period. There may be zero-size P that correspond to single unconnected trips. A set of paths  $\{P\}$  where every node is included, but a node is only associated with one (possibly zero-size) path, is known as a (node-disjoint) path cover. It represents the trip sequences serviced by a population of drivers over the course of the day. Alongside V(N,E), we initialized a solution graph  $S(N,\emptyset)$ , which has the same nodes as V, but no edges. This stores the path cover.
- 3. **Link sections of** V **in order of time:** we broke the day up into consecutive time bins each of width  $t_{\text{batch}}$ , and, in time-order, perform the following for each bin:
  - a. **Create a subgraph**  $V_b$ , which consists of a set of trip  $\{n\}_b$  with pick-up times between t and  $t + t_{\text{batch}}$ , and all previous trips  $\{n\}_{lb}$  that have feasible links to those in  $n_s$ .  $\{n\}_{lb}$  trips may have drop-off times earlier than t.
  - b. **Transform**  $V_b$  **into a bipartite graph:** following Boesch and Gimpel (27), we converted  $V_b$  into a bipartite graph  $\hat{V}_b$  by splitting each node n into the trip drop-off  $n^d$  and pick-up  $n^o$ , then mapping the edges of  $V_b$  onto these new nodes such that an edge connecting  $n_i$  and  $n_j$  in  $V_b$  connects  $n_i^d$  and  $n_j^o$  in  $\hat{V}_b$ . Finding a path cover in  $V_b$  is equivalent to finding a matching— a subset of edges such that each node has only one adjacent edge— in  $\hat{V}_b$  (25, 27).
  - c. Find a matching for the bipartite graph: we then used one of several algorithms to determine a matching within  $\hat{V}_b$ . These are detailed below. Once a matching was found, it was converted back into a path cover in  $V_b$ .
  - d. Transfer the path cover onto S, and prune V: the edges of  $V_b$  were transferred to S. Nodes with new outgoing edges in S had their outgoing edges in V removed, so that these nodes are not included in future subgraphs.
- 4. **Determine volumes on streets:** once solution S was complete, we converted the path

cover back to a set of en-route trips and corresponding volumes on streets.

2 The matching algorithms we tested are:

 • **Maximum cardinality matching**: find a bipartite graph matching with as many edges as possible. This is equivalent to determining the minimum number of drivers required to service all trips within a time bin (25). Our implementation uses the bipartite maximum matching function from networkx (28).

- Minimum weight maximum cardinality matching: unlike the above algorithm, which does not take edge weights into account, this produces a maximum cardinality matching whose network weights are minimized. Effectively, this algorithm first minimizes the number of drivers, then optimizes their trip assignments to minimize the total en-route time. We implemented this as a minimum flow assignment problem using Google ORTools (29).
- **Greedy matching**: connect each pick-up with the available drop-off with the shortest en-route time, handling the pick-ups in order of time. Drop-offs that are connected to pick-ups are no longer available to be connected with future pick-ups. This is a simplified version of Uber's driver-passenger matching algorithm (24, 26). Since trips are linked individually by order of pick-up time, a solution was calculated on the entire graph V, rather than through batching.

Our code for generating feasible links is available in bdit\_triprouter, while the code for trip linking is available at https://github.com/CityofToronto/bdit\_triplinker.

Since trip linking is a highly simplified model of how drivers are connected with passengers using limited data, it cannot be used to reconstruct the exact service history of individual drivers. Our aim is instead to produce a set of trip linkages that, in the aggregate, resembles real-life enroute deadheading.

25 Trip Linking Calibration

We calibrate trip linking by selecting the combination of matching algorithm and parameters that best reproduces the distribution of passenger wait times in the trip records on October 20, 2016. The two tunable parameters are  $\delta$  and (except for greedy matching)  $t_{\text{batch}}$ . We used a Bayesian hyperparameter optimizer to tune these for each of the matching algorithms, using the Jensen-Shannon divergence (30) between the recorded and trip linking distributions of passenger wait times as an objective function. Distributions from the optimally calibrated algorithms are compared with the reported distribution in Figure 1.

For both maximum cardinality and greedy matching, we found the optimal  $\delta$  to be as large as possible ( $\approx 20\,\mathrm{min}$ , as mentioned in the methodology). For maximum cardinality, the optimal  $t_{\mathrm{batch}}$  is as small as possible (1 min, as timestamps after April 2017 are at best accurate to the minute). Interestingly, the minimum weight maximum cardinality matching produced a distribution of wait times offset by  $\sim 1.5\,\mathrm{min}$  from the reported distribution regardless of the tuning parameter values. Between the three matching algorithms, maximum cardinality produced a distribution closest to the recorded one, and so was selected to produce our final results in Figure 4. Since no wait time data was available for September 13, we use the same parameters as for October 20.

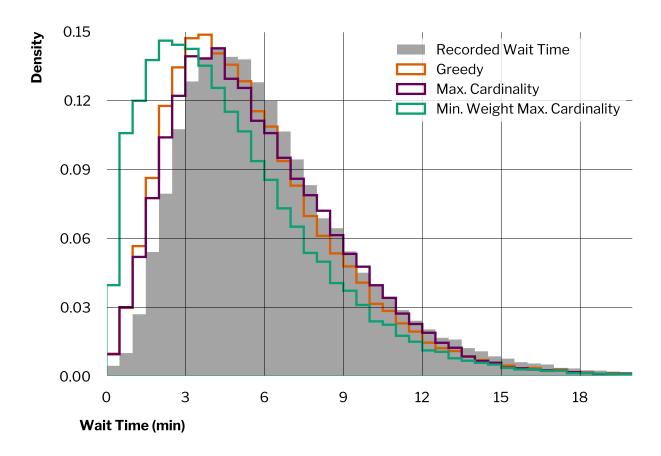


FIGURE 1: Recorded distribution of passenger wait times on October 20, 2016, compared with ones calculated from trip linking using different matching algorithms.

## **Testing and Validating the Volume Estimation Process**

Validating Trip Routing

Trip routing was validated by comparing routed distance with distance in the ridesourcing trip records. 3

4 For October 20, 2016, the fractional difference between recorded and routed distance is  $-8\% \pm 17\%$ . Both these values change by  $\lesssim 4\%$  if only trips greater than the median distance, trips within downtown Toronto, or trips during peak commuting hours (7:00 - 10:00 a.m. and 4:00 -6 7:00 p.m.), are considered. The discrepancy can partly be explained by the lack of turn restrictions, 7 and partly by routing not capturing real-world complications like queuing to turn at intersections, or circling to find an appropriate curbside location to drop-off a passenger. The standard deviation is also inflated from  $\sim 6\%$  of trips where the fractional difference is greater than -33%. Some of 10 these appear to be tours of errands returning to their origin. 11

To reduce the fractional difference between linked and recorded results, we aggregated to 12 the Toronto neighbourhood level ( $\sim 2$  km across). The fractional difference between recorded and 13 routed aggregate VKT within different neighbourhoods is  $-7 \pm 2$  ( $-6 \pm 4$  for morning commuting hours and  $-8 \pm 4$  for afternoon commuting).

Validating Trip Linking 16

15

23

24

25 26

28

29

- Trip linking was validated by comparing features of the generated results with reported values from 17
- the ridesourcing companies. 18

Number of Unique Drivers per Hour – A subset of ridesourcing companies provided the number of unique drivers per hour for a set of 39 days from December 2017 - March 2019. An ordinary least squares regression of the number of active drivers versus the number of trips gave:

$$N_{\text{Drivers}} = 0.475 N_{\text{Trips}} + 199.1$$
 (1)

(adjusted  $R^2 = 0.962$ ; RMS deviation = 274.7). This is equivalent to about two trips per driver 19 per hour, though it does not account for drivers working for multiple ridesourcing companies and 20 therefore slightly overestimates the number of drivers required to service trips from all companies 21 22 in an hour.

In Figure 2, we show the number of trips per hour on September 13, 2018, and compare the number of unique drivers predicted by Equation 1 and by trip linking. Trip linking reproduces well the two-humped shape of the best fit curve, but on average predicts  $\sim 10\%$  fewer drivers per hour, which in the evening peak is a deficit of  $\sim 500-800$  drivers. The trip linking driver number estimate for October 20, 2016 is also several hundred fewer drivers than the best fit one, but since there were only half as many trips on October 20 as there were on September 13, the fractional deficit is  $\sim 25\%$ .

- 30 Deadheading as a Fraction of Total Activity A subset of ridesourcing companies also provided
- the fraction of their fleetwide aggregate VKT spent deadheading, reporting that 55% of total VKT 31
- is for in-service driving, 35-40% is cruising, and 5-10% en-route driving. This means for each 32
- kilometer driven in-service, drivers typically travel an additional 0.6-0.7 kilometers cruising, and
- 0.1 0.2 kilometers en-route to their next trip.

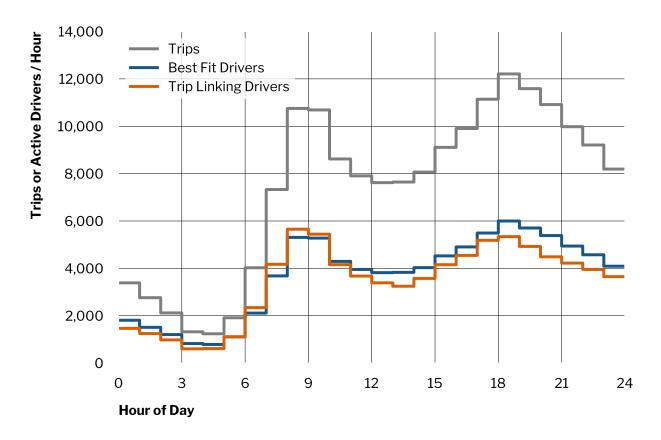


FIGURE 2: The number of trips per hour on September 13, 2018 and the number of unique drivers per hour servicing the trips as estimated by a best fit to the empirical data (Equation 1) and trip linking using the maximum cardinality matching algorithm.

The ratio of aggregate en-route to in-service VKT from maximum cardinality trip linking is 0.15 for both October 20, 2016 and September 13, 2018, consistent with the ridesourcing companies' records. However, the records show that deadheading is dominated by cruising, and while trip linking does not calculate a cruising VKT, we can estimate it by assuming the ratio of aggregate cruising to in-service time is roughly the same as the ratio of distances. The time ratios are sensitive to linking algorithm choice, and for September 13, 2018 range from 0.16 for maximum cardinality to only 0.09 for greedy matching. Regardless of algorithm, though, the ratio is always far lower than reported by the ridesourcing companies. Note that it is unclear whether they includes drivers making trips unrelated to ridesourcing while keeping their ridesourcing app open, which would inflate their cruising fraction.

#### 10 Assessing the Volume Estimation Process

Given that we did not have to specify anything about the size or behavior of the ridesourcing driver population, it is remarkable that trip linking is able to approximate both the passenger wait time distribution (Figure 1) and number of drivers per hour (Figure 2). That said, all combinations of linking algorithms and parameters underestimate the median passenger wait time by at least 20 sec, and the number of drivers by at least 10%. Moreover, it grossly underestimates the time vehicles spend cruising. All these point to trip linking significantly underestimating deadheading time and VKT. We therefore caution that our volumes on streets estimates are conservative.

It is possible that some of the assumptions underlying trip linking lead to unrealistic minimization of deadheading – most notably, the minimum weight maximum cardinality algorithm leads to a significant underestimate of the passenger wait time (Figure 1). One way of more realistically modelling ridesourcing inefficiencies would be to treat drivers as agents that stop working after a set time, or after a particularly long trip. Currently there is no maximum length of time for a work period, and 10% of periods from October 10, 2016 are longer than 4.6hrs. Another possibility is that we need to explicitly model cruising behaviour – perhaps circling or driving to another neighbourhood during cruising lengthens its duration. Implementing these features is a promising avenue for future work, though more empirical data on ridesourcing driver behaviour is required.

One reason we believe agent-based modelling is promising is the work of Calderón and Miller (12), who developed a prototype ridesourcing provision model using the ridesourcing trip records. Their model is agent-based, and uses recorded trip request times to link drivers and passengers, without requiring that the driver also arrive at the recorded pick-up time. They also instantiate drivers randomly throughout the city for deadheading before the first trip, and use a different method to determine en-route travel times than we do. While our method is better able to reproduce the recorded passenger wait time distribution, their aggregate fractional VKT values – 39% cruising, 19% en-route and 42% in-service – are much closer to trip record values, and they are able to roughly reproduce wait times and drivers per hour using fewer trip record attributes than we do. A comparative study will be required to understand which differences between our models is most responsible for producing these differences.

## 39 **RESULTS**

18

2021

23

2627

28

31

33

35

36 37

- 40 This section highlights the key results from our analyses, focussing on congestion and curbside activity.
- Ridesourcing trips have grown rapidly since September 2016, when the service was first

licensed by the City. An average of 176,000 trips were made daily in March 2019, an increase of over 180% since September 2016. As of March 2019, 105 million ridesourcing trips have been completed in the City of Toronto.

Ridesourcing trip-making peaks are observed in two distinct time periods:

- **Friday and Saturday Nights:** the busiest periods are Friday and Saturday nights, peaking at an average 13,100 trips per hour at midnight on Sunday morning. This time period is typically associated with nightlife activity, which is reflected in the dominance of trips in the downtown Entertainment District during this time.
- Weekday Commuting Periods: ridesourcing is heavily used in the morning and afternoon peak periods, typically associated with the times during which the road network experiences the most traffic. This trip market has increased over the past two years.

## 11 Ridesourcing trips are more commuter-focused outside of Downtown

- 12 Commuter trips are emerging as a major trip market that are being increasingly captured by rides-
- 13 ourcing. This is illustrated in Figure 3, which shows a landscape with two distinct geographies:
- downtown neighbourhoods generally see more than two Friday and Saturday night trips (7 p.m.
- 15 to 3 a.m.) for every weekday commuter period (weekdays 7 a.m. to 10 a.m. and 4 p.m. to 7
- 16 p.m.) trip while the opposite is true in the suburbs where trips are much more commuter-focused.
- 17 Figure 3 also compares the average hourly pick-ups by hour of week for September for the down-
- 18 town district of Toronto and East York, and the three suburban districts combined. Trip rates are
- 19 similar between the two geographies weekdays from 4 a.m. until 8 a.m., when they peak in the
- 20 suburbs. Approximately half of these trips are to the nearest subway station (10%) or within their
- 21 district (40%), the other half are to other suburban districts (40%) or to downtown (10%). This
- 22 demonstrates that a portion of ridesourcing service is helping bring passengers to subway service
- while alleviating concerns that they are enabling significant volumes of commuters to be driven
- 24 downtown during the peak.

3

4 5

6 7

8 9

10

25

26

28 29

30

32

38

40

For trips starting downtown, the a.m. peak occurs an hour later at nearly 5,000 trips/hr. This is also an hour later than peak transit ridership according to the Transportation Tomorrow Survey (10). This is when ride-sourcing is least competitive with transit, with travel time savings of on average 8 min/trip. 73% of these trips would have been one-seat rides had they been taken (10).

The suburban afternoon peak is as high as the morning peak if a little wider. Downtown the afternoon peak continues into the evening, bolstered by evening entertainment trips.

## Ridesourcing in Downtown Toronto make up 5-8% of total traffic

Figure 4 shows our conservative estimate of ridesourcing volumes which does not include cruising estimates. The largest volumes of ridesourcing vehicles are concentrated downtown where they account for between 5 and 8% of overall daily traffic in downtown neighbourhoods. The busiest neighbourhood is Waterfront Communities-The Island, which includes major transportation nodes such as Union Station and Billy Bishop Airport.

On this day, ridesourcing accounted for approximately 1,230,000 VKT. This is estimated to be 1.9% of the total 67,200,000 VKT traveled in Toronto on average. The proportion of traffic in a.m. and p.m. peak commuting periods is slightly lower than the overall daily totals, reflecting the higher relative ridesourcing volumes that occur during evening hours.

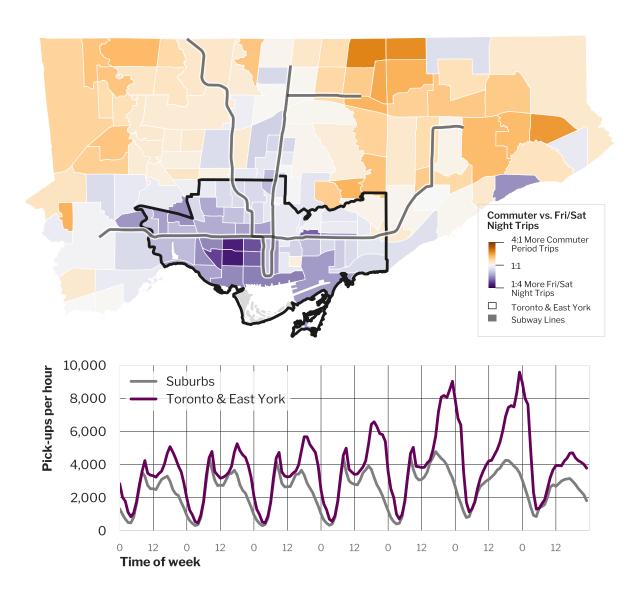


FIGURE 3: Average ridesourcing pick-ups by neighbourhood and time in September 2018. Above: a map of the ratio of commuter to Friday/Saturday night trips. The district of Toronto East York is outlined in black, and the subway system in gray. Below: number of pick-ups per hour within and outside of Toronto East York over the course of the week.

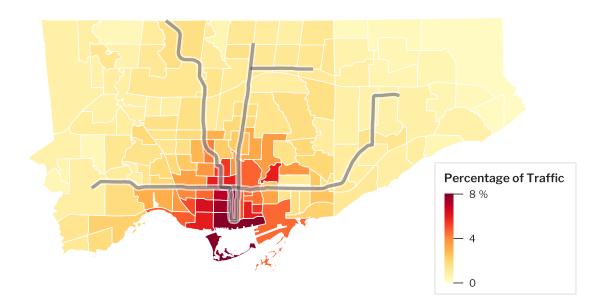


FIGURE 4: Percentage of total City VKT due to ridesourcing activity for September 13, 2018. Only in-service and en-route VKT are included (see Methods)

# Downtown travel times have been stable over 18 months while ridesourcing trips increased by 96%

- 2 Figure 5 shows the percent change in average travel time based on Bluetooth sensor readings on 3 most major streets in the downtown core, the area of the City where ridesourcing trip concen
  - trations are highest. This data shows marginal changes in travel times over the 18 months from October 2017 to March 2019 in the downtown core. Travel times on major streets have increased by 4% in the morning peak hour (7 to 10 a.m.), and decreased by 1% in both the afternoon peak period (4 to 7 p.m.) and Friday and Saturday nights (10 p.m. to 1 a.m.). Over this same span
- period (4 to 7 p.m.) and Friday and Saturday nights (10 p.m. to 1 a.m.). Over this same span, ridesourcing trips increased 96% city-wide, from 83,800 to 164,000 daily trips.

Given that changes in travel times have been negligible in the neighbourhoods where ridesourcing makes up the largest proportions of overall traffic, there is insufficient evidence at this time to make any definitive linkages between ridesourcing volumes and changes in travel time.

# Pick-up and drop-off data highlight conflicts with no-stopping zones and bike lanes

11

12

A particular safety concern with ridesourcing pick-up and drop-off activity is potential conflicts with cyclists, especially when it occurs in close proximity to cycling infrastructure. A detailed look at pick-up/drop-off data has shown hotspots during the morning commute period where pick-up and drop-off activity is occurring in no-stopping zones. The largest hotspots are in the Financial District. Figure 6 shows a similar analysis of pick-ups and drop-offs adjacent to bike lanes and separated bike facilities between 7 a.m. and 7 p.m. during a typical weekday in September 2018. There is a significant volume of pick-up and drop-off activity near high-use bike facilities. This highlights locations that could benefit from additional separation between bike lanes and vehicular traffic. Despite the greater accuracy of the positions, it is impossible to conclude from this data



FIGURE 5: Monthly average travel time in Toronto's downtown core for the a.m. and p.m. commute periods, and for Friday/Saturday night. Times are normalized to their October 2017 averages to highlight fractional changes.



FIGURE 6: Hourly average number of ridesourcing pick-ups and drop-offs adjacent to bike lanes and separated bike facilities between 7 a.m. and 7 p.m. Data is averaged from Monday, September 10 to Thursday, September 13, 2018.

whether the ridesourcing vehicle was within or adjacent to a bike lane while picking up or dropping off passengers. Nevertheless, these hotspots indicate where they may be a high risk of conflicts.

#### 2 **DISCUSSION**

- 3 This section presents the results and outcomes of this study in context with other regulatory anal-
- 4 yses.

## 5 Congestion

- 6 A comparison of ridesourcing VMT as a proportion of total VMT with other cities that have per-
- 7 formed similar studies shows that Toronto is at an earlier stage of maturity. The TNCs Today
- 8 report by the SFCTA estimated VMT from ridesourcing vehicles to be at 6.5% of city-wide week-
- 9 day VMT (31) in 2016. A 2019 report by the NYC Taxi and Limousine Commission and the NYC
- 10 Department of Transportation estimates 30% of VMT in Manhattan can be attributed to rides-
- ourcing vehicles (6). The same report recommends continuing the freeze on issuing new licenses
- 12 to ridesourcing drivers and requiring ridesourcing companies to reduce cruising (any time spend
- with the ridesourcing app on but without passengers) as a percentage of driving time to 31% in
- 14 Manhattan.

#### 15 Curbside Management

- 16 A number of cities have implement dedicated passenger loading/unloading zones to respond to
- 17 growing demand for curb space, to reduce conflicts with competing uses for curb access, and as
- 18 part of their Vision Zero programs. These include City of West Hollywood (32) and Washington,
- 19 D.C. (33). The City of Toronto will use pick-up/drop-off (PUDO) data to inform the design of bike
- 20 infrastructure and inform prioritization of infrastructure upgrades. Further study would be required
- 21 to determine how designated passenger loading zones could be implemented and how providing
- 22 digitized curb regulation data could better manage curb utilization. Additional monitoring and
- 23 analysis is needed to better understand the extent of conflicts between cyclists and pick-up and
- 24 drop-off activity and to determine if this activity correlates with improved cycling comfort and
- 25 reduced rates of cyclist conflicts.

## 26 **CONCLUSION**

- 27 This study has looked at what is most-likely the first wave of disruptions from new mobility busi-
- 28 nesses in Toronto. Trip growth is not anticipated to slow in the upcoming years and these services
- 29 will likely create traffic and operational challenges throughout the City in the future. However,
- 30 the rapid growth in trips demonstrates ridesourcing services have been immensely popular with
- 31 Toronto residents. They now play an important role in many residents' daily travel patterns includ-
- 32 ing an increasing role in daily commuter travel.
- 33 An executive summary of the Transportation Impacts of Vehicle-for-Hire report was at-
- 34 tached to the Staff Report prepared by Municipal Licensing & Standards and presented to the
- 35 General Governance & Licensing committee on June 24, 2019. Councillors requested we report
- on the number of ride-sourcing vehicles operating and to elaborate on our findings regarding con-
- 37 gestion. The report and these additional analyses were discussed at City Council on July 18th.
- gestion. The report and these additional analyses were discussed at City Council on July 16th.
- 38 Council approved staff recommendations, with amendments. The following relevant regulations
- 39 were approved:

40

• Request that taxi/ridesourcing be a field on the standardized collision reporting form.

41 Require that all vehicle for hire brokerages and companies report collision incidents.

- Create an accessibility fund to encourage the purchases of accessible vehicles.
- Require that all vehicle for hire drivers receive driver training.
  - Require additional data to be provide by ridesourcing companies: aggregate vehicle volumes in geographic areas, pick-up and drop-off data at a 10 m resolution, aggregate number of vehicles having completed trips by hour.
  - Require that taxi brokerages provide similar trip record data as ridesourcing companies

Council further required Transportation Services to report in 2020 on whether there has been an impact on congestion from vehicles for hire, what mitigating measures can be taken, and determine the appropriate number of vehicles for hire. Council also required a report on the safety of ridesourcing operations and the feasibility of requiring vehicle for hire applications to route them such that they do not stop to pick-up or drop-off passengers in "no stopping" zones.

The goal of the Transportation Impact Study was to build a deeper understanding of these new services and to pave the way for future work and studies to keep in front of these rapidly changing trends. This will allow the City to define policy to support the benefits of ridesourcing services while minimizing adverse impacts to traffic, to the environment and to the equity of mobility services.

Having performed this comprehensive study, we claim that transportation agencies need three important datasets to be derived from ridesourcing activity, each which its own utility for regulation:

- **Trip OD records:** for transportation planning;
- Ridesourcing vehicle volumes: for congestion management; and
- Pick-up/drop-off activity: for curbside management and vision zero planning.

For the purposes of this study we were provided trip records and PUDO data, and we presented a novel process to derive vehicle volumes from trip records which other agencies could use.

## 26 ACKNOWLEDGMENTS

1

3

4 5

6

7

8

9

10

11

12

13

15

16

17

18

19 20

21

22

- 27 The authors confirm contribution to the paper as follows: study conception and design: Raphael
- 28 Dumas, Jesse Coleman, Charles Zhu; data collection: Raphael Dumas, Rick Liu; analysis and
- 29 interpretation of results: contributions from all authors; draft manuscript preparation: Raphael
- 30 Dumas, Charles Zhu. All authors reviewed the results and approved the final version of the 31 manuscript.

The authors would like to thank Cathy Nangini and Chelsea Rosic, of the Big Data Innovation Team, for their contributions to the Transportation Impacts Study which were not included in this paper. They would also like to thank the research team at the University of Toronto Transportation Research Institute led by Professors Miller, Habib, and Shalaby for their research, insight, and contributions to this study.

#### 37 **REFERENCES**

- 38 [1] Schneider, T. W., Taxi and Ridehailing Usage in New York City. https:
- 39 //toddwschneider.com/dashboards/nyc-taxi-ridehailing-uber-lyft-data.
- 40 Accessed July 17, 2019.

- 41 [2] City of Chicago, Transportation Network Providers Trips.
  - $1 \\ \qquad \text{https://data.cityofchicago.org/Transportation/Transportation-Network-} \\$
- 2 Providers-Trips/m6dm-c72p. Accessed July 17, 2019.
- 3 [3] Cooper, D., J. Castiglione, A. Mislove, and C. Wilson, Profiling Transport Network
- Company Activity using Big Data. *Transportation Research Record*, Vol. 2672, No. 42, 2018, pp. 192–202.
- 6 [4] Henao, A. and W. E. Marshall, The impact of ride-hailing on vehicle miles traveled. 7 *Transportation*, 2018, pp. 1–22.
- 8 [5] Ride Austin, *Ride-Austin-june6-april13*.
- 9 https://data.world/ride-austin/ride-austin-june-6-april-13. Accessed April 12, 2019.
- 11 [6] New York City Taxi and Limousine Commission and New York City Department of
- 12 Transportation, *Improving Efficiency and Managing Growth in New York's For-Hire Vehicle Sector.* https:
- //www1.nyc.gov/assets/tlc/downloads/pdf/fhv\_congestion\_study\_report.pdf,
- New York City Taxi and Limousine Commission, 2019.
- [7] City of Toronto, TORONTO MUNICIPAL CODE CHAPTER 546, LICENSING OF
   VEHICLES-FOR-HIRE.
- 17 VEHICLES-FOR-HIRE.
  18 https://www.toronto.ca/legdocs/municode/toronto-code-546.pdf, 2019, accessed
  19 July 30, 2019.
- 20 [8] Big Data Innovation Team and University of Toronto Transportation Research Institute, *The Transportation Impacts of Vehicle-for-Hire in the City of Toronto*.
- https://www.toronto.ca/wp-content/uploads/2019/06/96c7-Report\_v1.0\_2019-06-21.pdf, City of Toronto, 2019.
- 24 [9] Loa, P., J. Hawkins, and K. N. Habib, Use of "SP-off-RP" Experiment to Understand the
- 25 Impacts and Utilization of Ride-Hailing Services and the Determinants of Mode Choice:
- The case of the City of Toronto. *Submitted to Transportation Research Record*, 2019.
- 27 [10] Li, W., A. Shalaby, and K. N. Habib, Comparative Analysis of the Travel Characteristics
- between Ride-Hailing and Public Transit in Toronto. *Submitted to Transportation Research Record*, 2019.
- 30 [11] Li, W., A. Shalaby, and K. N. Habib, Exploring the Ridership Impacts of Ride-hailing on 31 Multimodal Public Transit in Toronto. *Submitted to Transportation Research Record*, 2019.
- 32 [12] Calderón, F. and E. J. Miller, A Prototype Model of Ridehailing Service Provision.
- Submitted to Transportation Research Record, 2019.
   [13] Erhardt, G. D., S. Roy, D. Cooper, B. Sana, M. Chen, and J. Castiglione, Do tra
- Erhardt, G. D., S. Roy, D. Cooper, B. Sana, M. Chen, and J. Castiglione, Do transportation
   network companies decrease or increase congestion? *Science Advances*, Vol. 5, No. 5, 2019.
- 36 [14] New York City Office of the Mayor, For-Hire Vehicle Transportation Study.
- https://www1.nyc.gov/assets/operations/downloads/pdf/For-Hire-Vehicle-
- Transportation-Study.pdf, New York City Office of the Mayor, 2016.
- 39 [15] Intersection File City of Toronto.
- https://open.toronto.ca/dataset/intersection-file-city-of-toronto/, 2019, accessed July 30, 2019.
- 42 [16] SharedStreets, Taxi and TNC Activity.
- https://sharedstreets.io/taxi-tnc-activity/, 2019, accessed July 30, 2019.

- [17] Reddy, B. R. C., A. Ganji, S. Abiola, and M. Hatzopoulou, *Analyzing the Effects of* 44 Transit-Only Corridors on Traffic and Emissions in the Affected Neighbourhoods: A 1
- 2 Before-After Intervention Analysis. Presented at 98th Annual Meeting of the Transportation
- 3 Research Board, Washington, D.C., 2019.
- [18] The PostgreSQL Global Development Group, *PostgreSQL*. https://www.postgresql.org. 4 Accessed July 17, 2019. 5
- [19] PostGIS Project, PostGIS. https://postgis.net. Accessed July 16, 2019. 6
- [20] Eros, E., How the SharedStreets Referencing System Works. https: 7
- //sharedstreets.io/how-the-sharedstreets-referencing-system-works/. 8
- 9 Accessed July 30, 2019.
- 10 [21] pgRouting Project, pgRouting. https://pgrouting.org. Accessed July 16, 2019.
- [22] Anderson, D. N., "Not just a taxi"? For-profit ridesharing, driver strategies, and VMT. 11
- 12 Transportation, Vol. 41, No. 5, 2014, pp. 1099–1117.
- 13 [23] Gurley, B., A Deeper Look at Uber's Dynamic Pricing Model.
- http://abovethecrowd.com/2014/03/11/a-deeper-look-at-ubers-dynamic-14
- 15 pricing-model, Above the Crowd. Accessed July 19, 2019.
- 16 [24] Stanford University School of Engineering, Dawn Woodward: How Uber matches riders
- and drivers to reduce waiting time. https://www.youtube.com/watch?v=jZk04aqvzBU. 17
- 18 Accessed July 27, 2019.
- [25] Vazifeh, M. M., P. Santi, G. Resta, S. Strogatz, and C. Ratti, Addressing the minimum fleet 19 problem in on-demand urban mobility. Nature, Vol. 557, No. 7706, 2018, p. 534. 20
- [26] Hanna, J. P., M. Albert, D. Chen, and P. Stone, Minimum cost matching for autonomous 21
- 22 carsharing. IFAC-PapersOnLine, Vol. 49, No. 15, 2016, pp. 254–259.
- [27] Boesch, F. T. and J. F. Gimpel, Covering points of a digraph with point-disjoint paths and its 23
- application to code optimization. Journal of the ACM (JACM), Vol. 24, No. 2, 1977, pp. 24
- 25 192–198.
- 26 [28] Swart, Pieter and Schult, Dan and Hagberg, Aric, NetworkX.
- https://github.com/networkx/networkx. Accessed July 27, 2019. 27
- [29] Google Operations Research, Google OR-Tools. 28
- https://developers.google.com/optimization. Accessed July 27, 2019. 29
- 30 [30] Lin, J., Divergence measures based on the Shannon entropy. *IEEE Transactions on*
- Information theory, Vol. 37, No. 1, 1991, pp. 145–151. 31
- [31] San Francisco County Transportation Authority, TNCs Today: A Profile of San Francisco 32
- Transportation Network Company Activity. https: 33
- 34 //www.sfcta.org/sites/default/files/2019-02/TNCs\_Today\_112917\_0.pdf.
- 35 Accessed July 29, 2019.
- [32] City of West Hollywood, THE DROP. 36
- https://www.weho.org/city-government/city-departments/facilities-and-37
- recreation-services/parking-services/the-drop. Accessed July 29, 2019. 38
- 39 [33] District Department of Transportation, Mayor Bowser and DDOT Announce
- 40 Pick-Up/Drop-Off Zone Pilot Program Expansion.
- 41 https://ddot.dc.gov/release/mayor-bowser-and-ddot-announce-pick-updrop-
- 42 zone-pilot-program-expansion. Accessed July 29, 2019.