

Group 24 Assignment Report

An Evolutionary Algorithm for an elevator to deliver as many people as possible to their desired floor

Oskar Sundberg Linus Savinainen
Samuel Wallander Leyonberg Gustav Pråmell
Joel Scarinius Stävmo

October 1, 2024

Contents

1	Introduction	3
2	Optimize elevator routing	4
2.1	Mathematical formulation	4
2.2	Similar published academic work	4
2.1	Why this evolutionary approach	6
3	Algorithm	7
4	Experimental part	8
5	Results and Analysis	10
5.1	Building 1	11
5.2	Building 2	12
5.3	Building 3	13
5.4	Building 4	14
6	Conclusions	15

1 Introduction

This report addresses an investigation for optimizing an elevators route to improve the efficiency of picking up and delivering passengers to their desired floors in the least amount average waiting time. In large buildings with a lot of floors, efficient elevators are crucial for managing traffic and must serve every one in a reasonable time. Poorly designed elevator systems will lead to long waiting time, unnecessary stops and unsatisfied users. Elevator technology have made progress during the years, but many elevators still struggle with finding an efficient way to serve passengers.

The hypotheses that evolutionary algorithms will be able to find near-optimal or optimal routes for elevators aiming to maximize the number of passengers served while minimizing travel distance and/or travel time is the core focus in the report. Different strategies and hyperparameter are experimented with to enable demonstration of how evolutionary algorithms can be used in such a problem.

This paper will focus on a statically defined problem, i.e., there will not be more passengers coming to the elevator as time goes on, unlike a normal elevator.

2 Optimize elevator routing

2.1 Mathematical formulation

2.2 Similar published academic work

2.2 A Genetic Algorithm Based Elevator Dispatching Method For Waiting Time Optimization [1] explains how they solve a similar problem but with multiple elevators (what they call cars) instead of our one elevator per building. This paper has been our starting point in terms of algorithms and our approaches by following their flow chart provided in the paper.

The paper describes a 21% improvement with their methods compared to Ghareib paper [2] on the same problem. As this problem is not interlay equal to ours, comparison with this would not give a representee outcome. However, by following the approach in the paper we can run our own simulations for our problem space and compare the results to results given with (theoretically) more suited genetic operations.

INVESTIGATION OF OPTIMIZATION TECHNIQUES ON THE ELEVATOR DISPATCHING PROBLEM [3] investigates for different approaches in terms of algorithm to the problem at hand. One of there algorithm to solve the elevator dispatching problem is a genetic algorithm where they use Davis-order crossover, swap mutation and calculate average time for occupants witch is used as fitness function. There building (problem space) and predefined settings where as following:

The results from their test show that GA where the best performing algorithm for this problem with the definitions above.

This paper presents results that we later compare to ours with our first implementation as given of the flow chart[1] as well as later implementation with updated genetic operations. Given their result for testing different algorithms on the problem, a genetic algorithm approach seems to contribute with the best result to the elevator dispatching problem. Crossover and Mutation Operators of Genetic Algorithms [3] lists and shortly describes different types of crossover and mutation operations. They describe Wright's heuristic crossover and categorized it as one of the crossover functions how's offspring are "in the exploration region near the parents" [3]. This reduce premature offspring by overcoming local maximum. On further investigation into different implementations of heuristic crossover, the concept seamed as a good crossover function for our problem due to its simplicity and ability to be largely modified to suit our problem and fitness function.

Approach Our starting point was highly inspired from the flowchart above [1]. Our idea was to implement this as a first approach to have a working code base and to be able to easily switch between genetic operations for experimental reasons. From the papers mentioned in 2.2 Similar papers, a conclusion was drawn that a heuristic crossover would suit our problem for it could be implemented to swap larger sections of genes from different parents. This would be important due to the fact that it is certain sequences of genes that will contribute towards a better result rather than single genes. Our fitness function was at first implementation only focused on giving points for delivering a passenger to its desired floor. This was to make sure that every passenger would arrive. However, we later changed this to have our fitness function take the time spent for the passengers instead together with a penalty time for not delivering a passenger to its destination. Our mutation function plays a fundamental role and is quite aggressive. It swaps genes and can increase or decrease the size of the chromosome. We choose this for avoiding local maximums found by our crossover function. As our implementation of a heuristic crossover function takes larger sequences out of one parent, our thought was that this would not give an explorational function, thus bringing the need for a more aggressive mutation function to compensate for this.

[4], "Each vertex of a graph initially may contain an object of a known type. A final state, specifying the type of object desired at each vertex, is also given. A single vehicle of unit capacity is available for shipping objects among the vertices. The swapping problem is to compute a shortest route such that a vehicle can accomplish the rearrangement of the objects while following this route."

Mapping the elevator problem to the swapping problem.

- Vertices are represented as floors in the elevator.
- The object is defined as a person.
- Initial state consists of N persons waiting at the floors.
- The final state is reached when all persons are at their destination floor.
- The elevator is a vehicle with a max capacity that moves the persons between floors, i.e. a single vehicle shipping objects among the vertices.
- The elevator problem is aiming to reduce the waiting time of the persons in the elevator and thereby reduce the distance traveled.

According to [4], "Even the simple swapping problem is NP-hard."

2.1 Why this evolutionary approach

3 Algorithm

4 Experimental part

This section describes the setup of experiments:

Each experiment consists of two JSON files: one representing the building which specifies where all people are located, and another containing the population with a set of initial genomes. These experiments are saved to files rather than being generated randomly each time to ensure the ability to run the same experiment multiple times for consistency.

One specific building which already had result data available was used to compare our algorithm's results against previously known results.

To thoroughly evaluate the algorithm we decided to test it on buildings of different sizes (small, medium, large) and with corresponding population sizes. Given the number of experiments required to be run we selected buildings with 10, 50, and 100 floors containing populations of 10, 50, and 100 people respectively. Additionally, the specific building mentioned earlier which has 21 floors and 10 people was included.

Buildings were generated with constraints ensuring that each floor could hold between 0 and half of the maximum population. While it was theoretically possible for all people to be on just two floors in practice the distribution was more balanced. For example in the small 10-floor building with 10 people the distribution looked as follows:

From		To
0	→	6
0	→	8
3	→	5
4	→	7
5	→	7
6	→	2
7	→	0
8	→	4
9	→	0
9	→	2

After generating and validating all buildings and populations we proceeded to run the experiments. Each experiment was conducted on a computer with an AMD Ryzen 7 7800X3D and took roughly ten seconds to a minute. In totally 150 experiments were run.

Due to time constraints the only parameter that was adjusted during the experiments was the mutation rate to limit the number of results to analyze. To ensure the reliability of results each combination of building and population was tested five times allowing us to identify potential anomalies. Experiments were conducted with two mutation rates, 10% and 60%, to observe differences in algorithm performance. The thought process behind the very high mutation rate was to semi-simulate the effects of a longer generation limit without significantly increasing runtime.

The experimental procedure is outlined as follows:

- Generate the building and population, or load a pre-existing experiment.
- Run the experiment generating a CSV file with results and a PNG with a graph.
- Re-run the same experiment with different parameters.
- Analyze the results to evaluate the algorithm's performance.

5 Results and Analysis

The following results are displayed using graphs to highlight some of the insights we have taken from the experiments we ran. Blue line and text represents our simplest crossover that swaps the last halves of two parents to create two children described in (3. X1). The red represents the second crossover that selects genes from each parent based on their fitness scores, described in (3. X2). The orange represents the third crossover that selects contiguous segments of genes from each parent based on their fitness scores, described in (3. X3).

We started off with a fitness function that gave 10 points for each person served, which in the end promoted the algorithm to serve all people in the building. The problem with this was that it tended to give long genomes because it was more beneficial to serve all people than to serve them quickly. We then changed fitness function to one that gave huge penalties for all people that wasn't served by the elevator when the route was finished. It also increased the score with one for each person not arriving to its destination for each floor traveled. This means that the lower score the better. It also made it possible for us to analyze the average waiting time and this was also a benchmark that most papers we found used for this kind of problem.

We didn't investigate how different mutation functions would affect the results. We used 5 different ones that was randomly selected when mutation occurred. The mutation functions we used was swapping a random element in a genome, increase the length of a genome, decrease the length of a genome and the combinations of swapping and increasing or decreasing the length of a genome. These are all thoroughly explained in (3. M).

5.1 Building 1

Figure 1 shows results with 100 people in the building and the worst performance from 5 runs for each crossover on the smallest building with 10 people in it. Figure 1a displays the worst case in these runs where the blue crossover failed to serve one person and then received a huge penalty. We used figure 1b to highlight that with more people inside the orange crossover kept getting good results with great consistency. The blue one also performed as good as the orange one, but it wasn't as consistent. The red one was extremely unreliable it performed well sometimes, but it also got stuck in local minimums for long time periods. Besides that it took more generations for all crossovers to reach an acceptable solution because of the increased number of people. The orange and blue crossover often reached a good solution quicker than the red one, and it also tends to get worse the more people it has to serve.

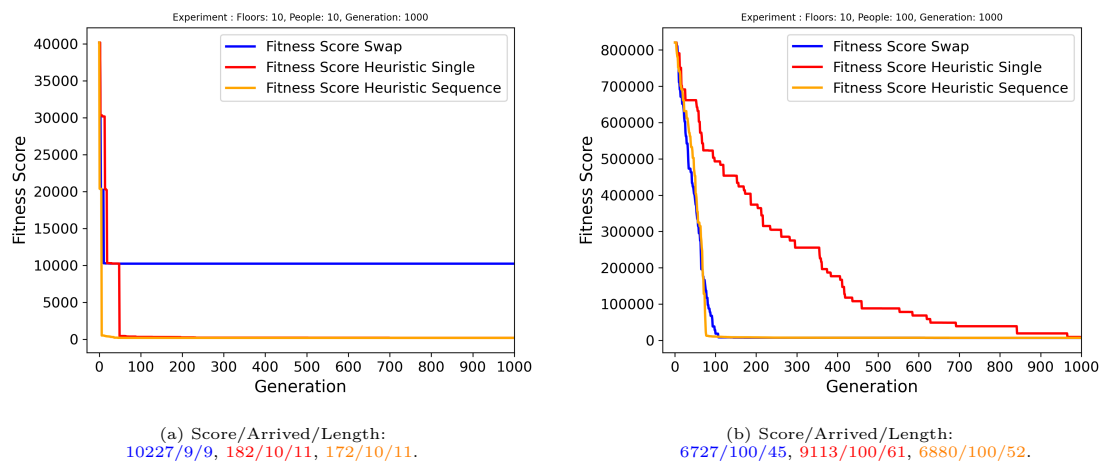


Figure 1: Building 1 comparing worst and best case.

5.2 Building 2

Our second building for experiment is a direct copy from INVESTIGATION OF OPTIMIZATION TECHNIQUES ON THE ELEVATOR DISPATCHING PROBLEM [2]. The population has the same starting floor and destination. The parameters for elevator population and number of generations are also set to match the values used for the experimentation in the paper. This was done to get a fair comparison between their results and ours. In their genetic algorithm they are using Davis-order crossover, swap mutation, elitism and their fitness function is calculating the average traveling time for all passengers. It is much like ours but we allow the length of a chromosome to change in the mutation operator. The average result they got from 5 runs was 279.1s per traveler, and the average from our 5 runs was 305.1s. Our algorithm was on average 26s (8.5%) slower than the result in the paper. As always this could have been just a coincidence but one factor might have been that Davis-order crossover divides the chromosome into more segments while ours only splits it into two larger segments. Why this might affect the result is because when we split the parent chromosome into two larger segments, parts of them will probably not contribute to a better result and they will have a larger chance for remaining throughout more generations. An approach that would have been interesting to test is to implement elements of heuristic operators into Davis-order crossover. This would allow for more segments being made but also have the more “dominant” parent transfer more of its genes into the next generations.

5.3 Building 3

As mentioned earlier the red crossover tends to perform worse the more people in the building instances and Figure 2 highlights this phenom again. In figure 2a the blue crossover actually outperform the orange one, that got stuck in a local minimum for a long time. The orange one also was slower than the blue one. In addition, figure 2b then shows a case where the blue one performed similar to how it performed in 2a and the orange one reached an extraordinary low score of 121157 without getting stuck in a local minimum. With other words this pinpoints that the orange crossover have a good worst case and great best case which makes it the most reliable crossover of the three.

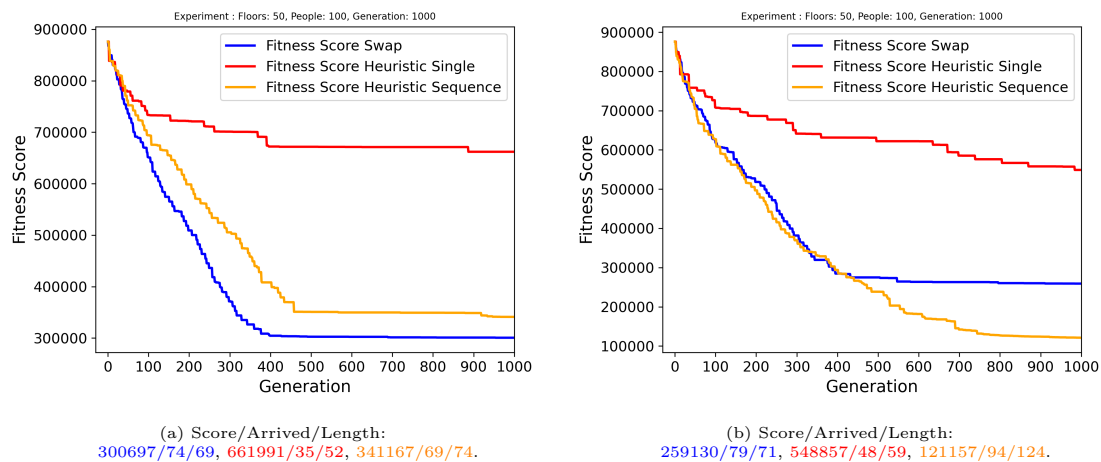


Figure 2: Building 3 comparing worst and best case.

5.4 Building 4

After running all the buildings with mutation rate of 10% we started testing out different values and quickly found out that our algorithm found a solution that serves all or almost all people much faster with a greater mutation rate. We display result from runs with a mutation rate of 60%. 3 shows how much faster our algorithm reach acceptable solutions than before. When mutation rate was low the best solutions gave us fitness scores around 500 000 but with a high rate we were able to get scores around 200 000. The best run served 66 people when mutation was 10%, the best run with mutation 60% served all 100 people. Reason behind this is that to be able to serve as many people as possible the genes have to mutate to become longer than number of floors. With a higher mutation rate this happens in much quicker pace and therefore the algorithm is able to leave local minimums faster. Therefore, a greater mutation rate is beneficial and less computational power is needed compared to increasing the population size or the number of generations. We tested increasing number of generations and received similar results as with a greater mutation rate. If we had more time to experiment with different mutation rates we could probably find an even better rate.

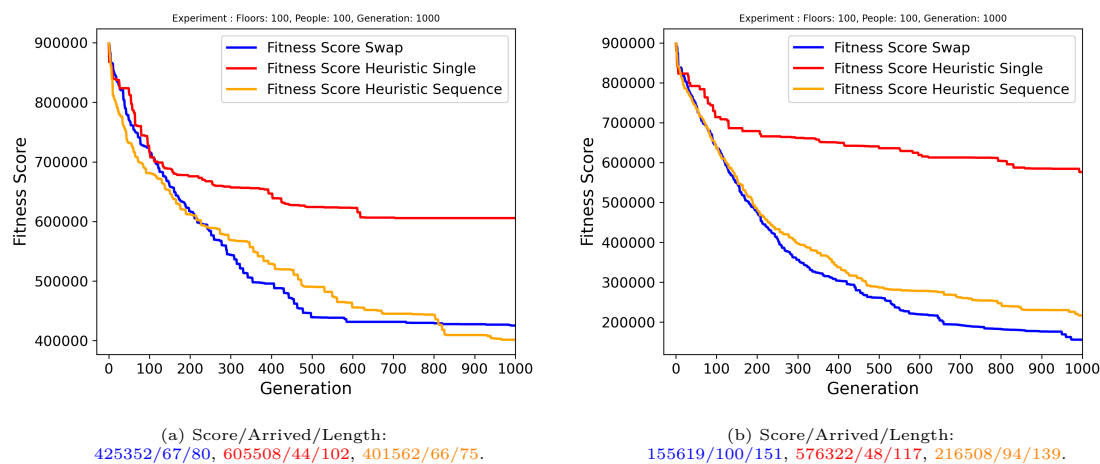


Figure 3: Building 4 comparing different mutation rates.

6 Conclusions

The paper mainly looked at different crossover functions impact on our genetic algorithm ability to find solutions for various buildings configurations. For the statistics the conclusions drawn are:

Building	Crossover function
1	Vilken som var bäst
2	Vilken som var bäst
3	Vilken som var bäst

Because the algorithm is not forced to find a solution where all people reach their destination floor, our implementations include a time penalty discussed in (3.x), this to incentivize the algorithm to serve all people to their destination floor. Further research on the impact of this time penalty in relation to the number of people in the building and their configurations and configurations.

A finding from the paper is that a higher mutation rate seems to be better. To determine this further research in this area is needed. Is a higher mutation rate better? If so, what is the optimal range?

In addition, this report does not focus on the selection algorithm for the problem. Further research on which selection algorithm will perform best for the problem at hand would be of interest. Also, it could be interesting to investigate how other mutation functions could impact the results.

References

- [1] E. O. Tartan and C. Ciftlikli, “A genetic algorithm based elevator dispatching method for waiting time optimization,” *IFAC-PapersOnLine*, vol. 49, no. 3, pp. 424–429, 2016.
- [2] W. Gharieb, “Optimal elevator group control using genetic algorithms,” *Computer and Systems Engineering Dept., Faculty of Engineering Ain Shams University*, 2005.
- [3] S. Ahmed, M. Shekha, S. Skran, and A. Bassyouny, “Investigation of optimization techniques on the elevator dispatching problem,” *arXiv preprint arXiv:2202.13092*, 2022.
- [4] S. Anily and R. Hassin, “The swapping problem,” *Networks*, vol. 22, no. 4, pp. 419–433, 1992.