
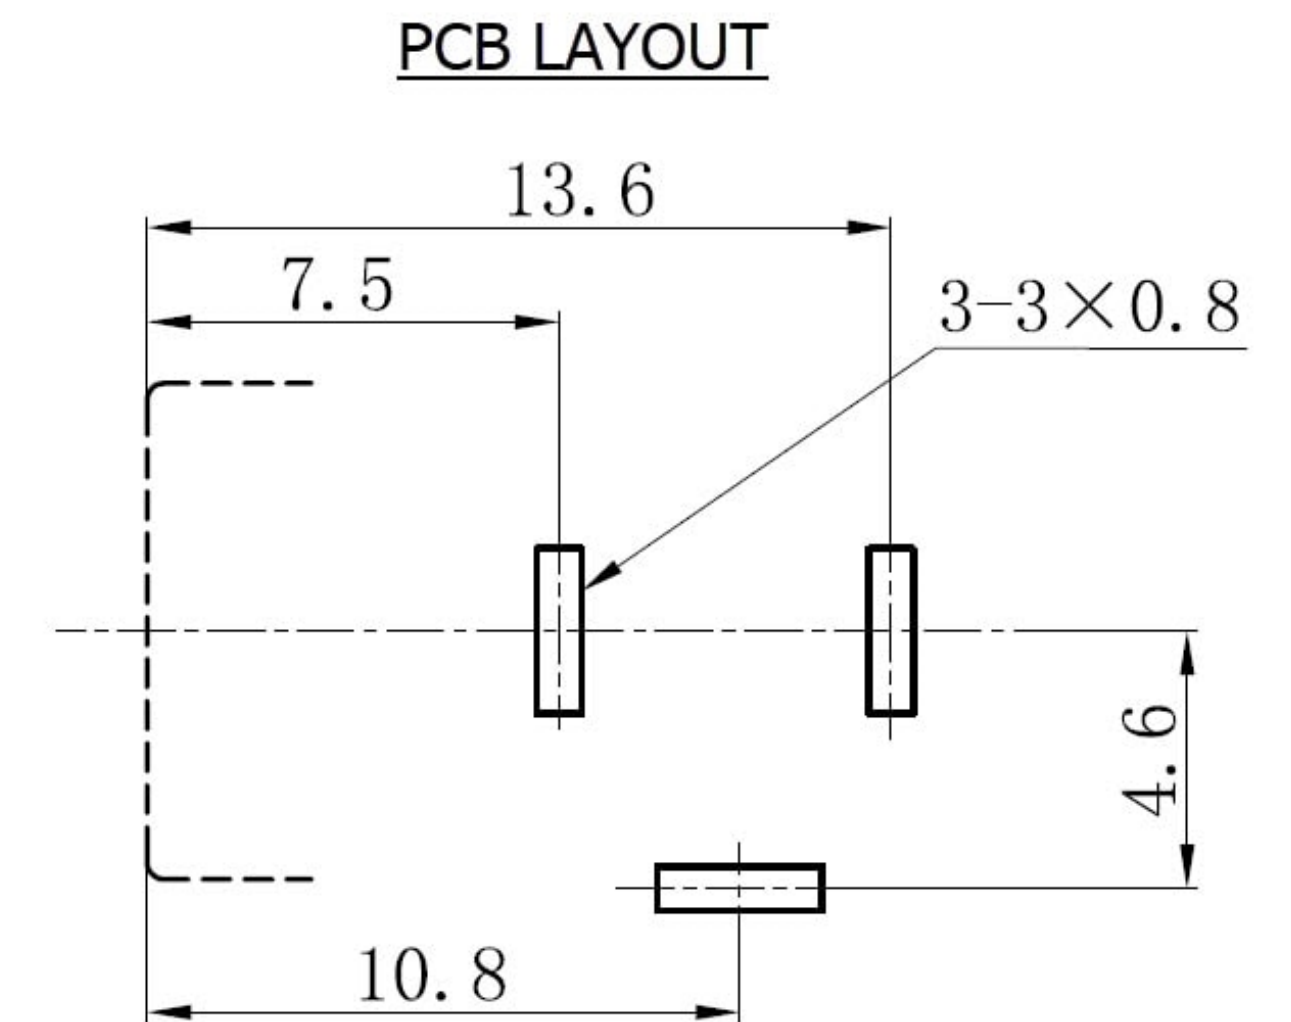
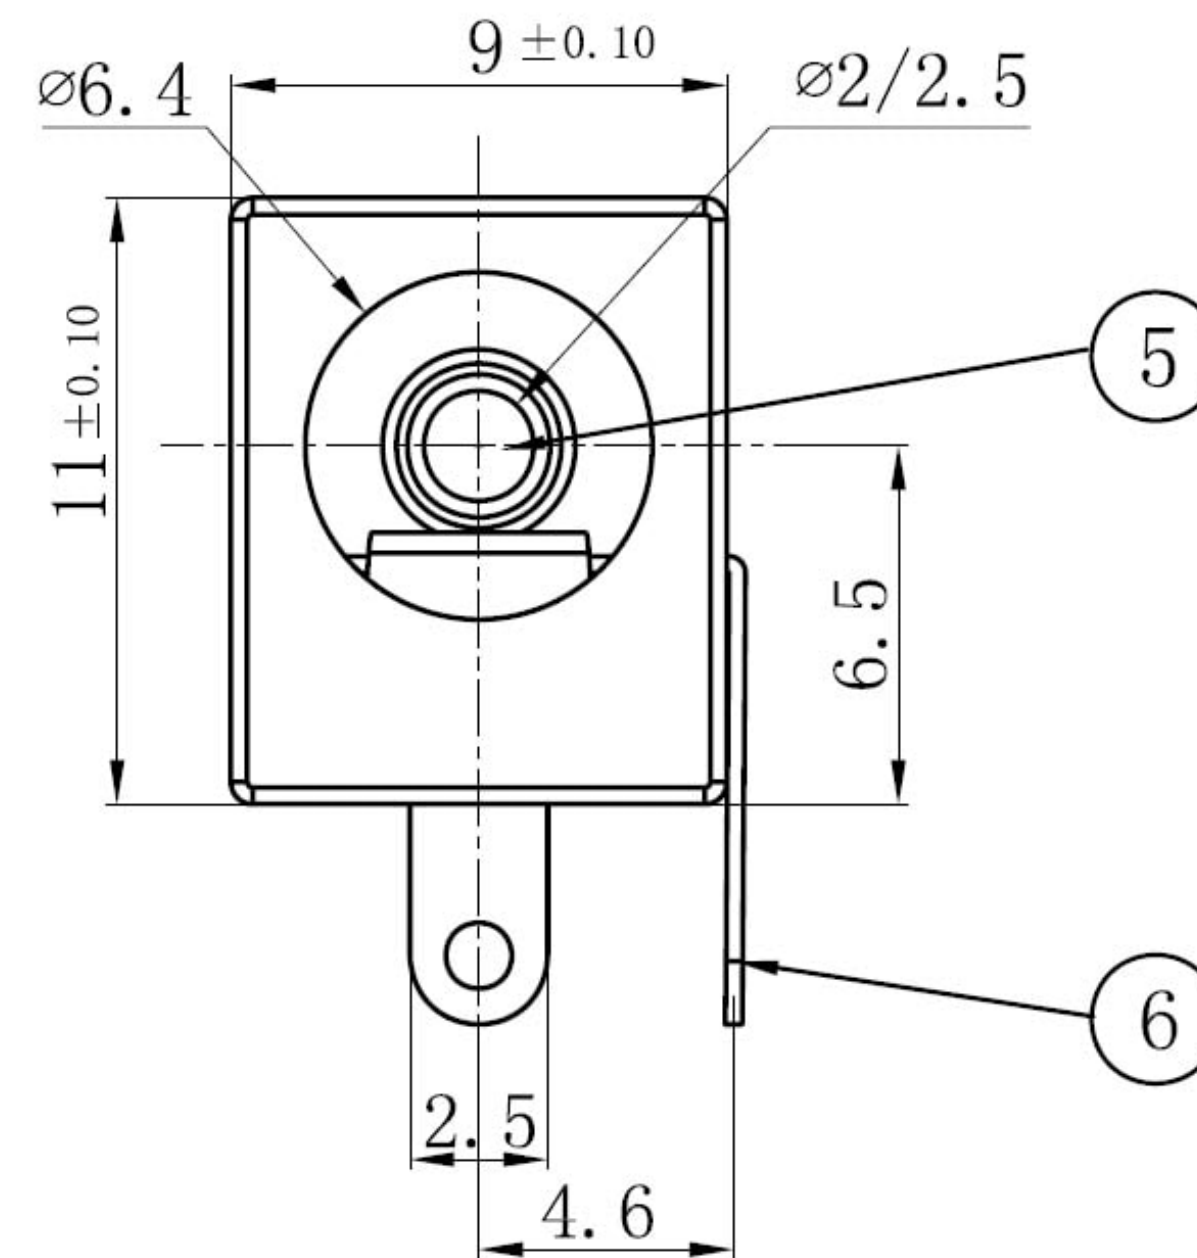



TOLERANCE MM	. Xx	. X	L	PRECISION	. X	L
	±0.05	±0.10	±0.20		±0.5	±1

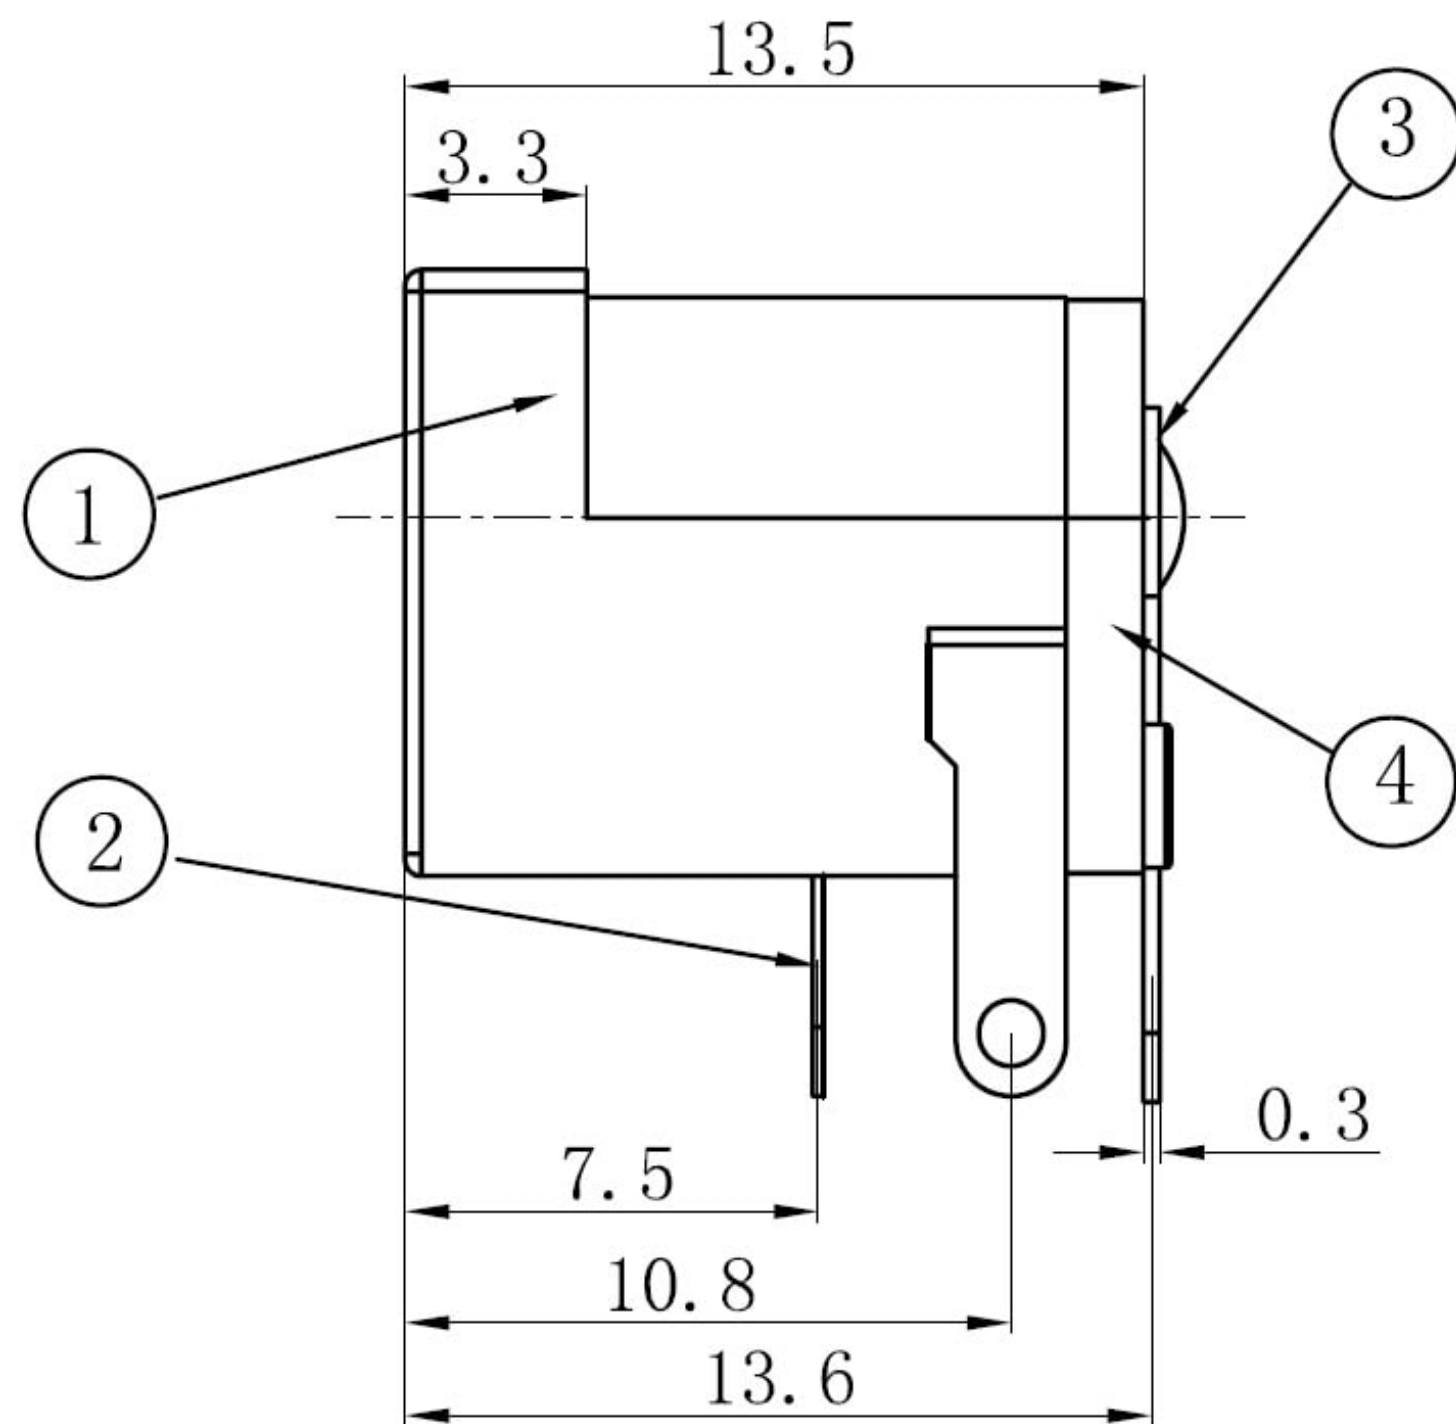

Specification:

1. RATING: 30V @ 2.5A
2. CONTACT RESISTANCE: $\leq 0.03 \Omega$;
3. INSULATION RESISTANCE: $\geq 100M \Omega$;
4. VOLTAGE WITHSTAND: AC500V (50Hz) /min;
5. FORCE: 3~20N;
6. LIFE: 5,000 CYCLES

SCHEMATIC

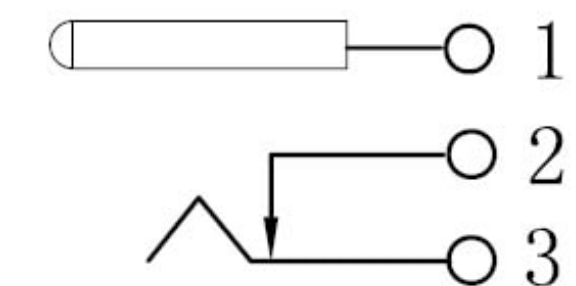

6	TERMINAL	1	H62 BRASS (Y) $\delta = 0.30mm$	COPPER TIN
5	CENTER PIN	1	H62 BRASS	COPPER TIN
4	BACK COVER	1	PBT	BLACK
3	BACK PLATE	1	H62 BRASS (Y) $\delta = 0.30mm$	COPPER TIN
2	FRONT TERMINAL	1	65Mn MANGANESE $\delta = 0.20mm$	TIN
1	HOUSING	1	PBT	BLACK
ITEM	DESCRIPTIONS	QTY.	MATERIALS	NOTES

UNIT			MODEL NAME:	CON-SOCJ-2155
MM				
RATIO				
1: 1				
