

Student:
Craig Fields

Email:
ckfields1@crimson.ua.edu

Time on Task:
1 hour, 34 minutes


Progress:
100%

Report Generated: Wednesday, April 22, 2026 at 7:22 PM

Section 1: Hands-On Demonstration


Part 1: Identify Failed Logon Attempts on Windows Systems

8. Make a screen capture showing the **Security Event Properties** dialog box on the vWorkstation.

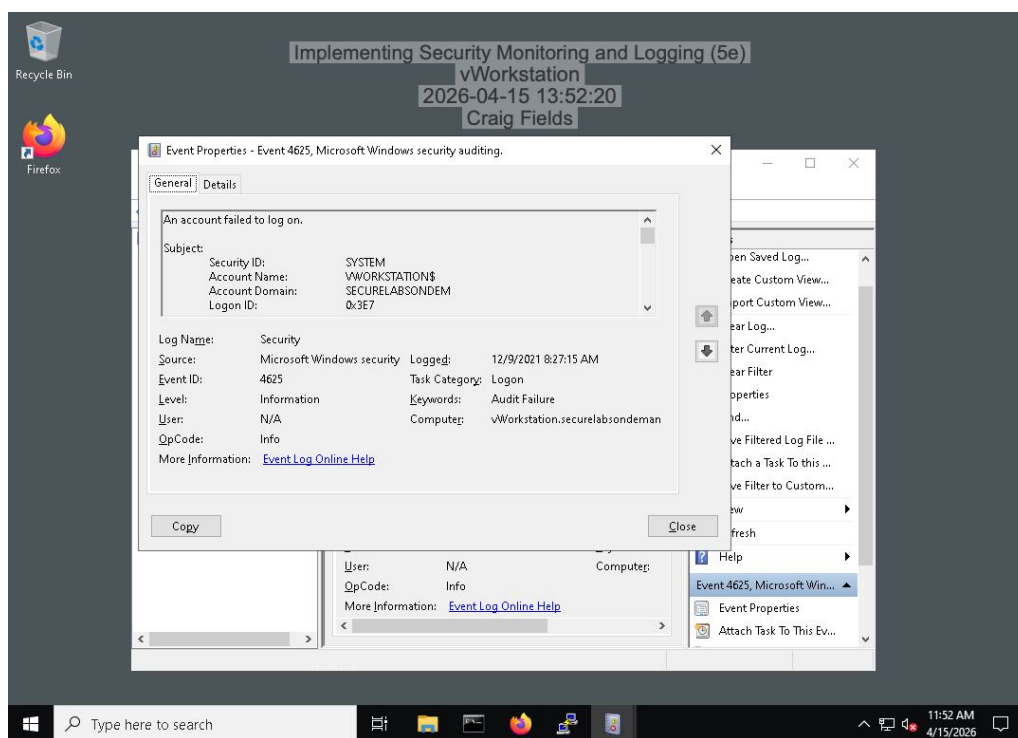


Part 2: Monitor Network Activity with Snort


17. Make a screen capture showing the updated Pass Lists page.

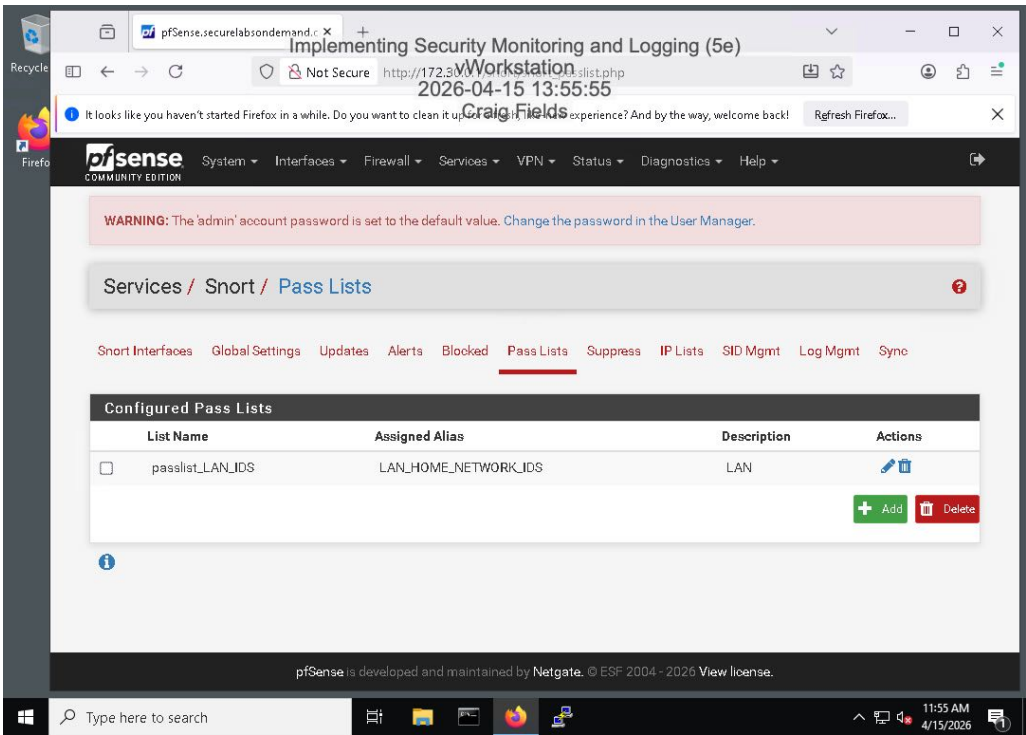


31. Make a screen capture showing the active Snort status on the LAN interface.

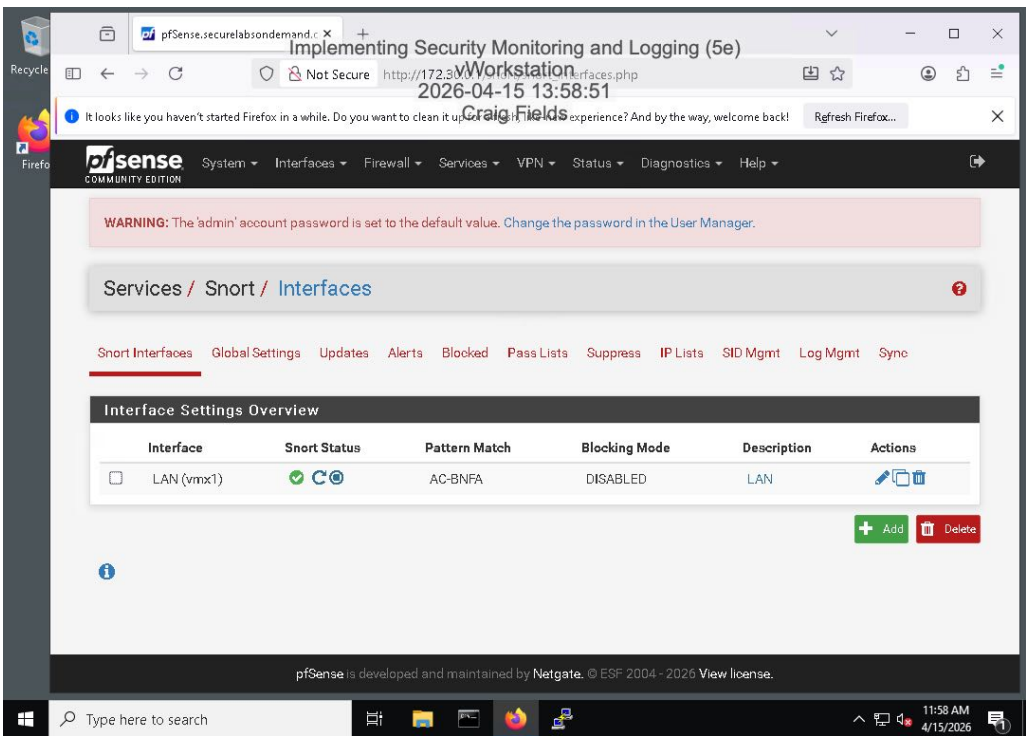

36. Make a screen capture showing the successful ping results.

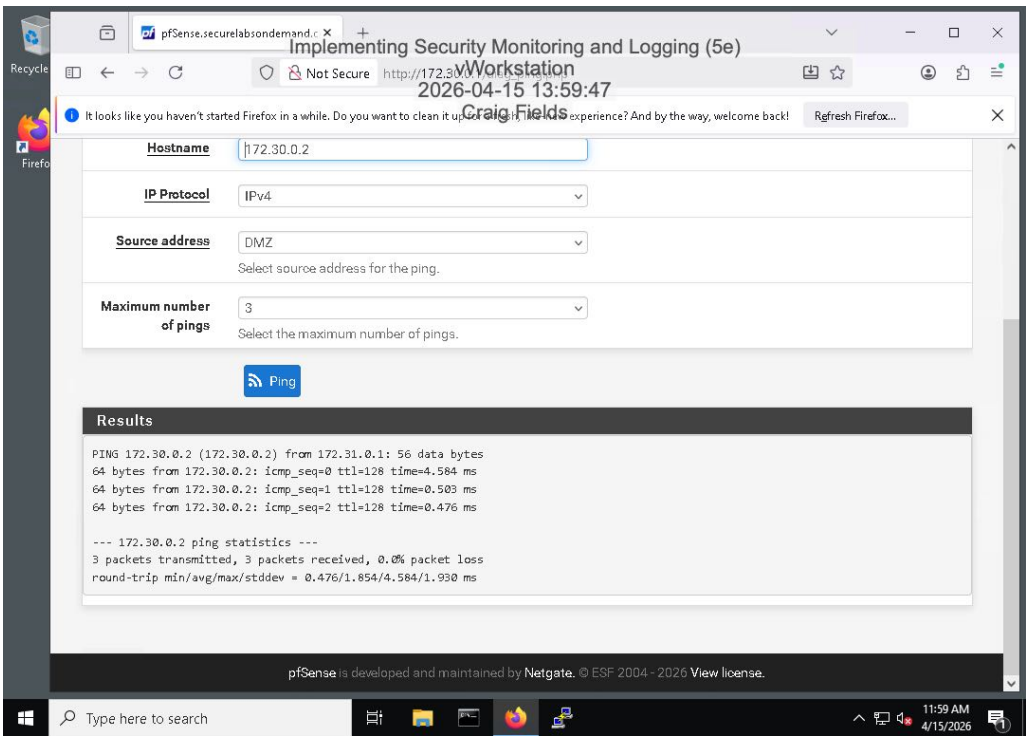


41. Make a screen capture showing the ICMP alerts in the Snort Active Log.

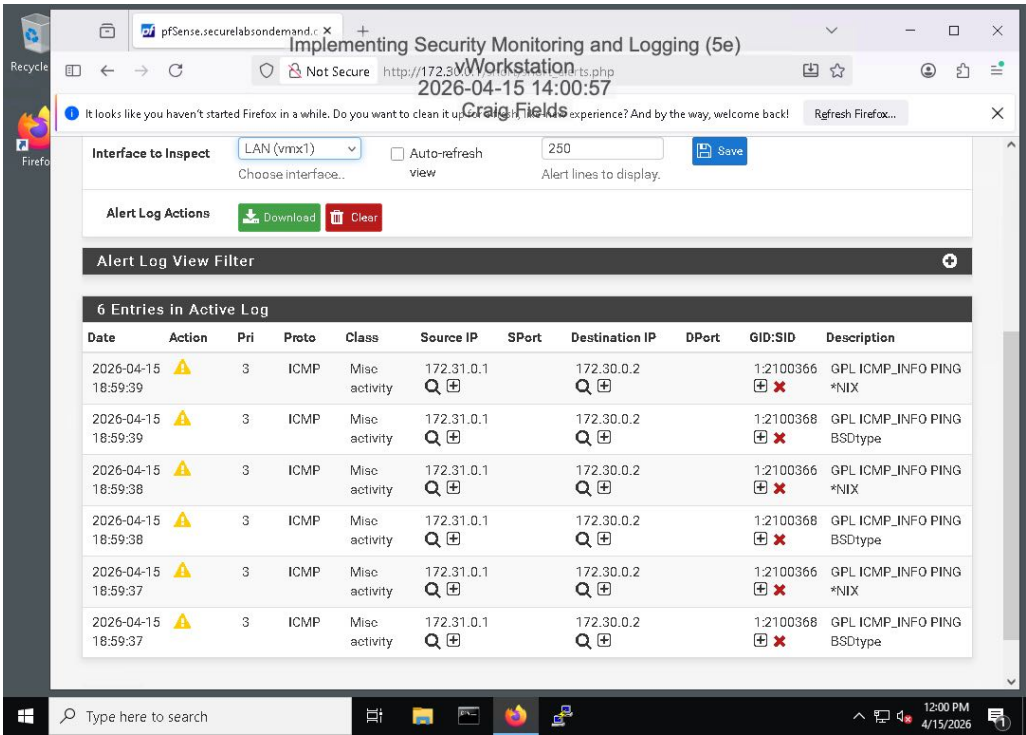

Section 2: Applied Learning


Part 1: Identify Failed Logon Attempts on Linux Systems

10. Make a screen capture showing the edited rsyslog.conf file.

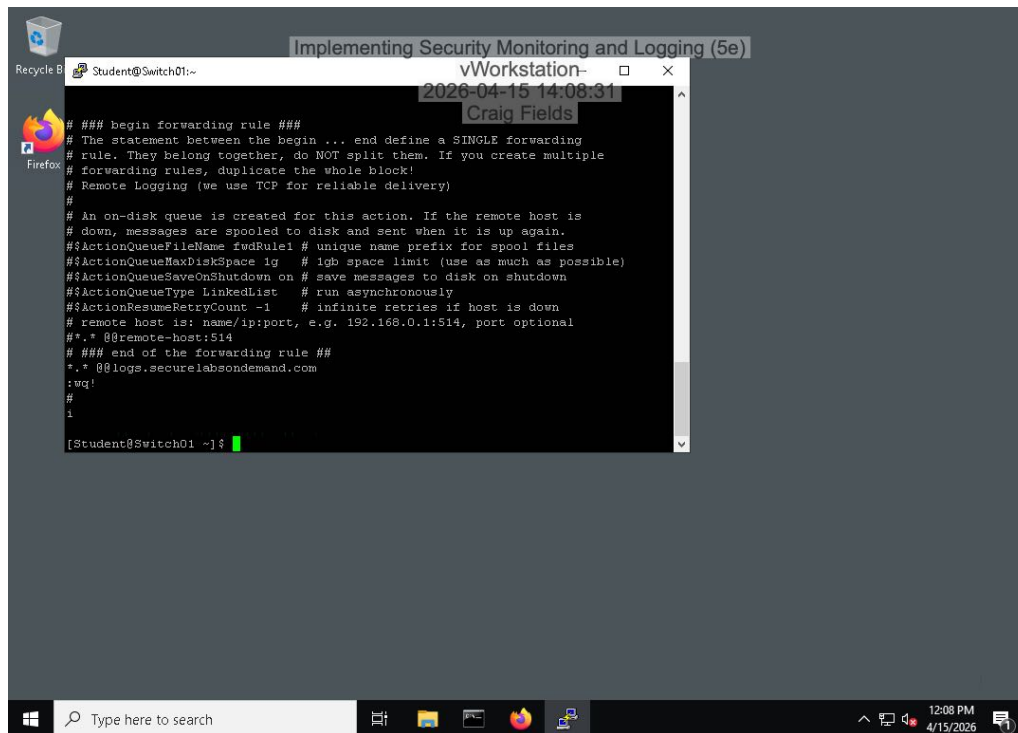

```
### begin forwarding rule ###
# The statement between the begin ... end define a SINGLE forwarding
# rule. They belong together, do NOT split them. If you create multiple
# forwarding rules, duplicate the whole block!
# Remote Logging (we use TCP for reliable delivery)
#
# An on-disk queue is created for this action. If the remote host is
# down, messages are spooled to disk and sent when it is up again.
# $ActionQueueFileName fwdRule1 # unique name prefix for spool files
# $ActionQueueMaxDiskSpace 1g # 1gb space limit (use as much as possible)
# $ActionQueueSaveOnShutdown on # save messages to disk on shutdown
# $ActionQueueType LinkedList # run asynchronously
# $ActionResumeRetryCount -1 # infinite retries if host is down
# remote host is: name/ip:port, e.g. 192.168.0.1:514, port optional
# *.* @remote-host:514
### end of the forwarding rule ##
*. * @logs.securelabsdemand.com
;wq!
#
i
```


20. Make a screen capture showing the failed login attempts.

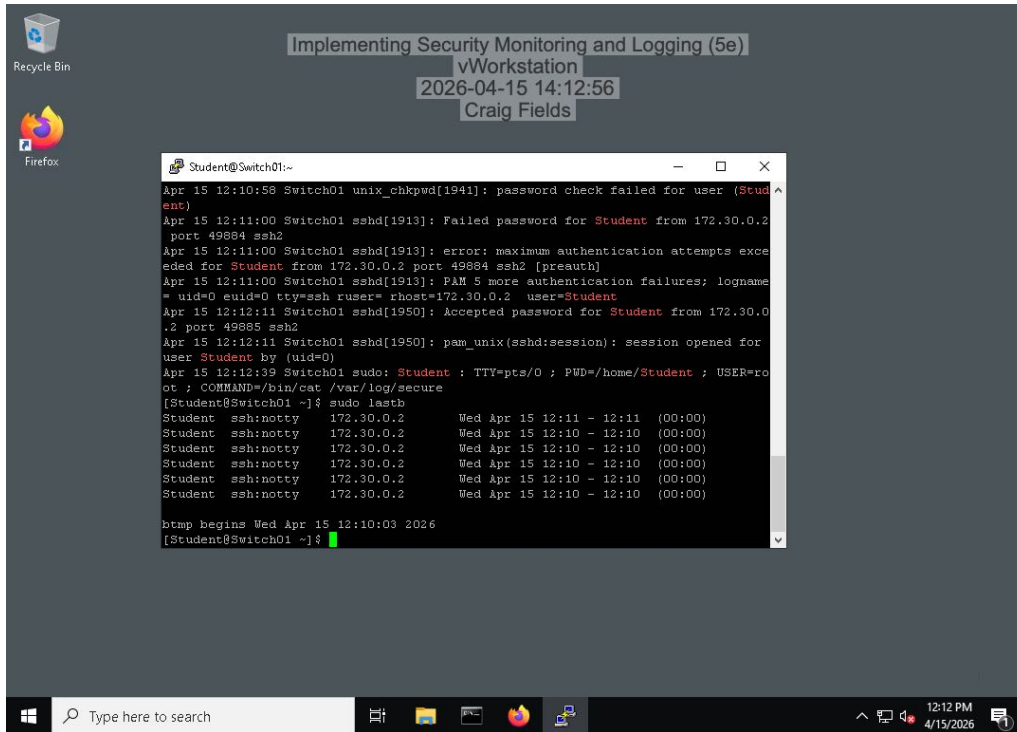

The screenshot shows a Windows vWorkstation desktop with a title bar that reads "Implementing Security Monitoring and Logging (5e) vWorkstation 2026-04-15 14:12:56 Craig Fields". On the desktop are icons for Recycle Bin and Firefox. A terminal window titled "Student@Switch01:~" is open, displaying the following log output:

```
Apr 15 12:10:58 Switch01 unix_chkpwd[1941]: password check failed for user (Student)
Apr 15 12:11:00 Switch01 sshd[1913]: Failed password for Student from 172.30.0.2 port 49884 ssh2
Apr 15 12:11:00 Switch01 sshd[1913]: error: maximum authentication attempts exceeded for Student from 172.30.0.2 port 49884 ssh2 [preauth]
Apr 15 12:11:00 Switch01 sshd[1913]: PAM 5 more authentication failures; logname='uid=0' suid=0 tty=ssh ruser= rhost=172.30.0.2 user=Student
Apr 15 12:12:11 Switch01 sshd[1950]: Accepted password for Student from 172.30.0.2 port 49885 ssh2
Apr 15 12:12:11 Switch01 sshd[1950]: pam_unix(sshd:session): session opened for user Student by (uid=0)
Apr 15 12:12:39 Switch01 sudo: Student : TTY=pts/0 ; PWD=/home/Student ; USER=root ; COMMAND=/bin/cat /var/log/secure
[Student@Switch01 ~]$ sudo lastb
Student  ssh:notty  172.30.0.2      Wed Apr 15 12:11 - 12:11 (00:00)
Student  ssh:notty  172.30.0.2      Wed Apr 15 12:10 - 12:10 (00:00)
Student  ssh:notty  172.30.0.2      Wed Apr 15 12:10 - 12:10 (00:00)
Student  ssh:notty  172.30.0.2      Wed Apr 15 12:10 - 12:10 (00:00)
Student  ssh:notty  172.30.0.2      Wed Apr 15 12:10 - 12:10 (00:00)
Student  ssh:notty  172.30.0.2      Wed Apr 15 12:10 - 12:10 (00:00)
btmp begins Wed Apr 15 12:10:03 2026
[Student@Switch01 ~]$
```

22. Make a screen capture showing the last 10 log messages.

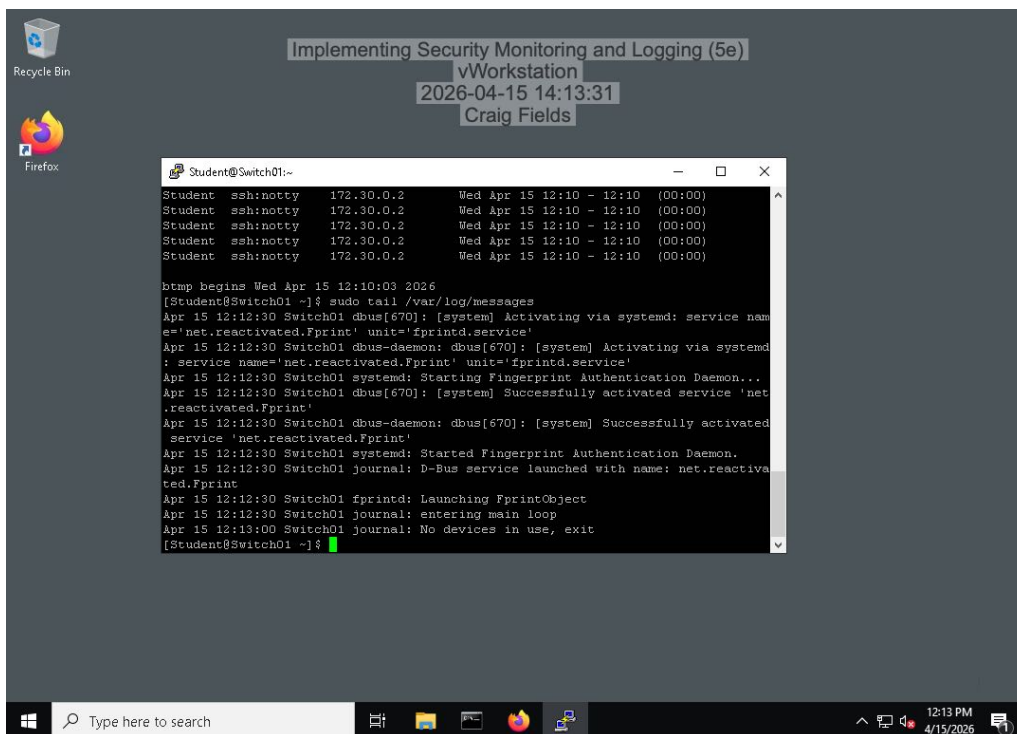


The screenshot shows the same Windows vWorkstation desktop as before, but the terminal window now displays the output of the command `sudo tail /var/log/messages`:

```
btmp begins Wed Apr 15 12:10:03 2026
[Student@Switch01 ~]$ sudo tail /var/log/messages
Apr 15 12:12:30 Switch01 dbus[670]: [system] Activating via systemd: service name='net.reactivated.Fprint' unit='fprintd.service'
Apr 15 12:12:30 Switch01 dbus-daemon: dbus[670]: [system] Activating via systemd: service name='net.reactivated.Fprint' unit='fprintd.service'
Apr 15 12:12:30 Switch01 systemd: Starting Fingerprint Authentication Daemon...
Apr 15 12:12:30 Switch01 dbus[670]: [system] Successfully activated service 'net.reactivated.Fprint'
Apr 15 12:12:30 Switch01 dbus-daemon: dbus[670]: [system] Successfully activated service 'net.reactivated.Fprint'
Apr 15 12:12:30 Switch01 systemd: Started Fingerprint Authentication Daemon.
Apr 15 12:12:30 Switch01 journal: D-Bus service launched with name: net.reactivated.Fprint
Apr 15 12:12:30 Switch01 fprintd: Launching FprintObject
Apr 15 12:12:30 Switch01 journal: entering main loop
Apr 15 12:13:00 Switch01 journal: No devices in use, exit
[Student@Switch01 ~]$
```

Part 2: Monitor File Integrity with Tripwire


12. Make a screen capture showing the **Object Summary** section for the Tripwire report.

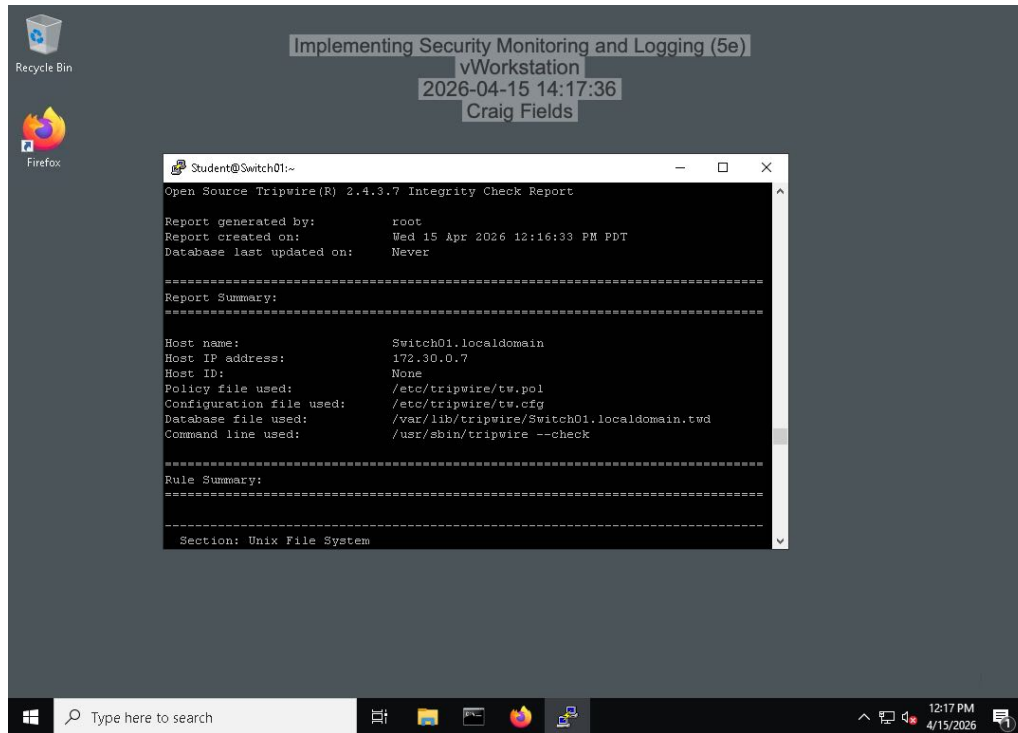

Section 3: Challenge and Analysis

Part 1: Identify Additional Event Types in the Event Viewer

1. Make a screen capture showing the **Security Event Properties** dialog box for an **Audit Failure** associated with **Event ID 5061**.

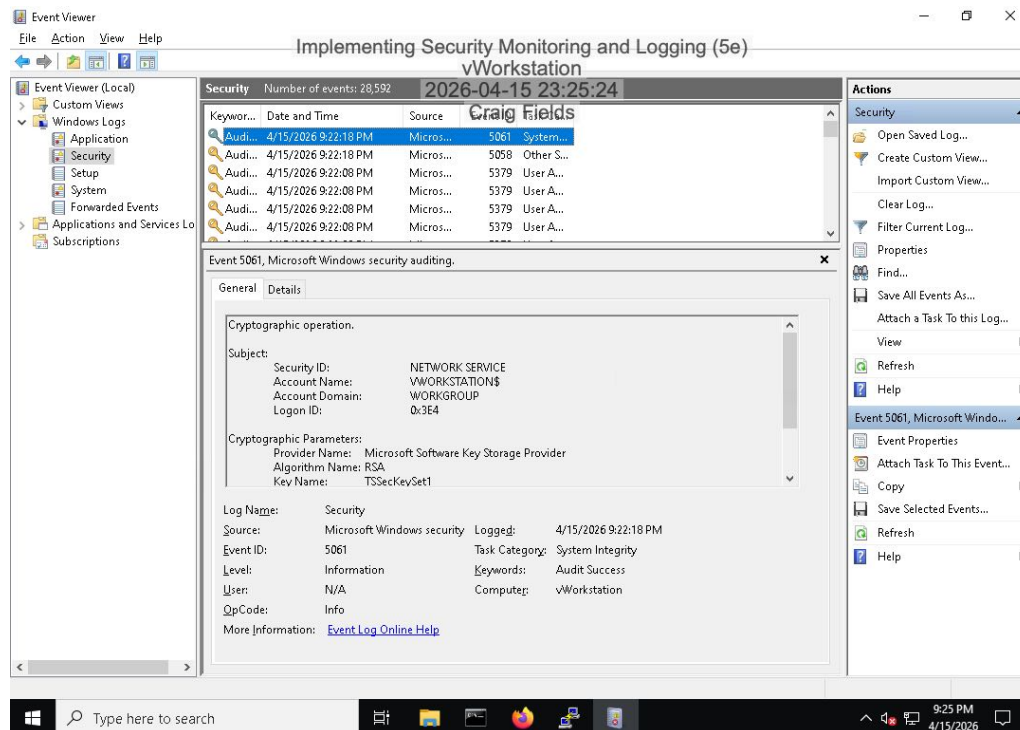

2. Provide a brief explanation of the operation that would generate a security event with Event ID 5061.

An Event ID of 5061 in the Microsoft Windows Security Event Log is used to record an occurrence related to the system's performance of a cryptographic operation. This event provides valuable information about how the system maintains and generates its cryptographic keys. Cryptographic keys are required for the secure transfer of data; encryption; and/or authentication. Therefore this event is very important when trying to monitor and maintain the security of your system running on windows. When an Event ID 5061 is generated, it generally means that a cryptographic operation was executed such as creating/deleting a cryptographic key, modifying usage of a key, etc. The Event ID 5061 will also report details about what was done, name of the cryptographic provider utilized by the application, name of the key container involved, success/failure status.

Part 2: Configure Snort as an Intrusion Prevention System

3. Make a screen capture showing the **Legacy Blocking Mode** enabled on the LAN interface.

