

For office use only

Team Control Number

For office use only

T1 _____

57566

F1 _____

T2 _____

F2 _____

T3 _____

Problem Chosen

F3 _____

T4 _____

B

F4 _____

**2017
MCM/ICM
Summary Sheet**

An optimized design of the area following the toll barrier

Summary

In order to determine the optimal shape and the size of the toll plaza, this paper proposes a simulation model for New Jersey Turnpike Authority to ameliorate the performance of the toll station.

First, after referencing to the common designs of toll stations in current use and analyzing the differences, the plaza is simulated by a number of tollbooths of different types. Each tollbooth is configurable in the simulation for vehicle passage type, charging mode and lane direction which will direct the vehicles into the merging flow. The performance is evaluated by a weighted average of throughput index, accident rate index and cost index. The weights are determined by principal component analysis.

The vehicles are simulated by a set of rectangles in a two-dimensional plane, with a moving strategy written based on car following (CF) model ¹, GM model ² and Nagel-Schreckenberg (NS) model ³. The vehicles are generated by the tollbooth by a probabilist model, given a fixed traffic flow and then fired for the merge. The vehicles submit to possible collisions with other vehicles and the road boundary. Both autonomous cars and human-driven cars are simulated, equipped with adapted moving strategies.

With this generalized and adapted model, the throughput can be obtained on calculating the average throughput result of multiple simulations. The accident rate is obtained by a larger set of simplified simulations. The cost is calculated by the construction area and tollbooth number. The experiments on *MATLAB* with different parameters of tollbooth and shape give an analysis of several design schemes, detailed in the report.

In the last part, with different parameters set, an improved design in terms of throughput is proposed on running an optimization algorithm. Various proportions of autonomous vehicles and tollbooths are also tested.

Keywords: ;

¹Reuschel and Pipes in 1956, Herman and Rothory in 1960

²Gazis,Herman and Rothery

³K.Nagel and M.Schreckenberg in 1992

Contents

1 A letter to the New Jersey Turnpike Authority

New Jersey Turnpike Authority,

Our team has proposed an optimized toll station design allowing the increase of throughput and the decrease of cost and accident rate. And a new mathematical model is built in order to help evaluate the performances of designs.

More specifically, the performance model is developed after taking all important elements related to this problem into consideration, like number of lanes and tollbooths, proportions of tollbooths, varieties of vehicles, change of flows, every decision made by drivers to turn right or left and traffic conditions.

2 Introduction

2.1 Statement of the problem

The design of toll station is undoubtedly a kind of art as it is hard to find a balance among safety, capacity and cost facing different situations. But it also acts as an essential part in the high-way traffic system. As a promotion of toll station is in demand, we apply mathematical methods and function models for optimize our design, striving to increase the throughput, decrease the cost and accident rate.

•

Theorem 2.1.

Lemma 2.2.

Proof. The proof of theorem. □

2.2 Assumptions

- All the vehicles leave the tollbooths with a given speed.
- There is a critical flow F_c , when the total flow $F_t > F_c$, the vehicles begin to queue up before the toll station.
- The proportions of different types of vehicles are invariable along the time.
- In light traffic, the tollbooths the vehicles arrive are random.
- We take each vehicle as a point located on the center of gravity, but the vehicles still have the volume.
- Time is divided into 1 second, drivers' decisions in every second depend on the surroundings and the status are updated every second. ⁴


⁴Nagel-Schreckenberg model applied.

- The accelerations of all the vehicles depend on the others who surround themselves.⁵
- The biggest wheel steering angle is 45° , and the turning radius is neglected.

Here we list the elements that will influence the throughput of our toll station:

Notations	Meanings
L	Number of lanes
B	Number of tollbooths
F_t	Total flow
F_c	Critical flow (the maximum of the total flow)
P_l, P_m, P_s	Probability of large-scale automobiles, midium-sized vehicles and compact cars
v_{this}, a_{this}	Speed and acceleration of the vehicle we study
v_n, a_n	Speed and acceleration of the other vehicles which surround the vehicle we study

3 Analysis of the Problem

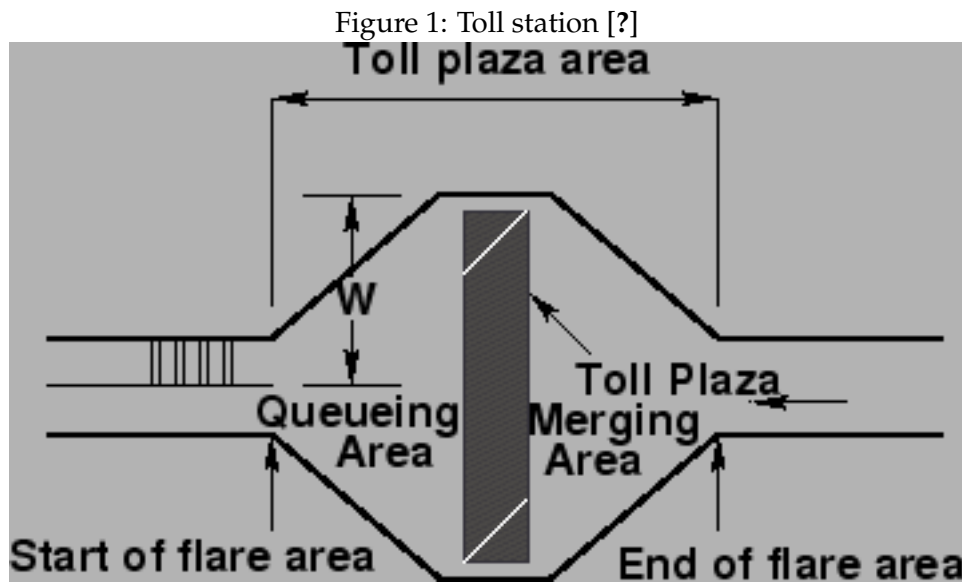

Due to the discrete traffic problem we meet, here we try to apply some mathematical models, and we take Nagel-Schreckenberg (NS) model [?], CF (car following) model and GM model for reference.

In our merging area, all the vehicles from B tollbooths are merging into L lanes. To begin with, every fifteen minutes there is F_t through the tollbooths, the flows of large-scale automobiles, midium-sized vehicles and compact cars are $F_t P_l, F_t P_m, F_t P_s$.

⁵Car following model applied.

Now we focus on one vehicle, the speeds of the other vehicles around it are taken as vector quantities which will be added on the one chosen. The relative speeds and relative distances of those vehicles around in last second will influence the decision the vehicle chosen takes in the next second.

Based on the active vehicles on the road and the road shape, the driver's decision includes acceleration on each direction ⁶.

The total acceleration is constituted by 3 parts:

$$\overrightarrow{a_{this}(t)} = \overrightarrow{a_i(t)} + \overrightarrow{a_r(t)} + \overrightarrow{a_a(t)}$$

In which case (this $\neq n$),

$$\overrightarrow{a_i(t)} = \overrightarrow{a_{interaction}(t)} = \lambda(v_{this}(t))^m \times \sum_n \frac{v_n(t) - v_{this}(t)}{(d_n(t))^l} \times \overrightarrow{dir_{n,this}(t)}$$

$$d_n(t) = distance_n(t) = \sqrt{\delta pos_x(t)^2 + \delta pos_y(t)^2}$$

$$\overrightarrow{dir_n(t)} = \frac{(pos_x - pos_{x,n}, pos_y - pos_{y,n})}{\| (pos_{x,this} - pos_{x,n}, pos_{y,this} - pos_{y,n}) \|}$$

$$\begin{aligned} \overrightarrow{a_r(t)} = \overrightarrow{a_{road}(t)} &= \alpha \times distance_{boundary-left}^{-l'} \times v(t)^{m'} \times \overrightarrow{right} \times 1_{d < d_{critical}} \\ &+ \alpha \times distance_{boundary-right}^{-l'} \times v(t)^{m'} \times \overrightarrow{left} \times 1_{d < d_{critical}} \\ distance_{boundary} &= |pos_x - pos_{distance}(pos_y)| \end{aligned}$$

$$a_a(t) = a_{acceleration}(t) = \beta(v_{max} - v(t)) \times a_{max} \times \overrightarrow{forward}$$

Here $\lambda, l, m, \alpha, l', m', \beta$ and a_{max} are the parameters that we can adjust.

Our simulation comes as follows:

⁶considering safe distance and GM model applied.

4 The Model Results

5 Validating the Model

6 Conclusions

7 A Summary

8 Evaluate of the Mode

9 Strengths and weaknesses

9.1 Strengths

- Applies widely
- Improve the quality of the airport service
-

Appendices

Appendix A First appendix

Here are simulation programmes we used in our model as follow.

Input matlab source:

```
function [t,seat,aisle]=OI6Sim(n,target,seated)
pab=rand(1,n);
for i=1:n
    if pab(i)<0.4
        aisleTime(i)=0;
    else
        aisleTime(i)=trirnd(3.2,7.1,38.7);
    end
end
end
```

Appendix B Second appendix

some more text **Input C++ source:**

```
//=====
// Name      : Sudoku.cpp
// Author     : wzlf11
// Version    : a.0
// Copyright  : Your copyright notice
// Description: Sudoku in C++.
//=====

#include <iostream>
#include <cstdlib>
#include <ctime>

using namespace std;

int table[9][9];

int main() {

    for(int i = 0; i < 9; i++){
        table[0][i] = i + 1;
    }

    srand((unsigned int)time(NULL));

    shuffle((int *)&table[0], 9);

    while(!put_line(1))
    {
        shuffle((int *)&table[0], 9);
    }

    for(int x = 0; x < 9; x++){
        for(int y = 0; y < 9; y++){
            cout << table[x][y] << " ";
        }

        cout << endl;
    }

    return 0;
}
```

References

- [Gazis et al., 1961] Gazis, Herman, and Rothery (1961). Nonlinear follow the leader models of traffic flows[j]. *Operations Research*, (9(4)):545–567.
- [K.Nagel and M.Schreckenberg, 1992] K.Nagel and M.Schreckenberg (1992). A cellular automaton model for freeway traffic. *J.PHYS.I(France)*2,2221 2229.
- [Mathew, 2014] Mathew, T. V. (2014). Toll operation–lecture notes in traffic engineering and management.