Specification ofMobile Receptionrobot

1. Product Overview

Mobile Reception robot is a service robotthatprovides welcome reception and securitypatrolfunctions,which is widelyused in officebuildings, hotels, supermarkets, restaurants, hospitals,exhibition halls and other places. It has theability ofactivewelcome, securitypatrol,video surveillance,leading reception, guided tour,product introduction, consulting services,etc.,and also supports application customization.

2. Product Appearance

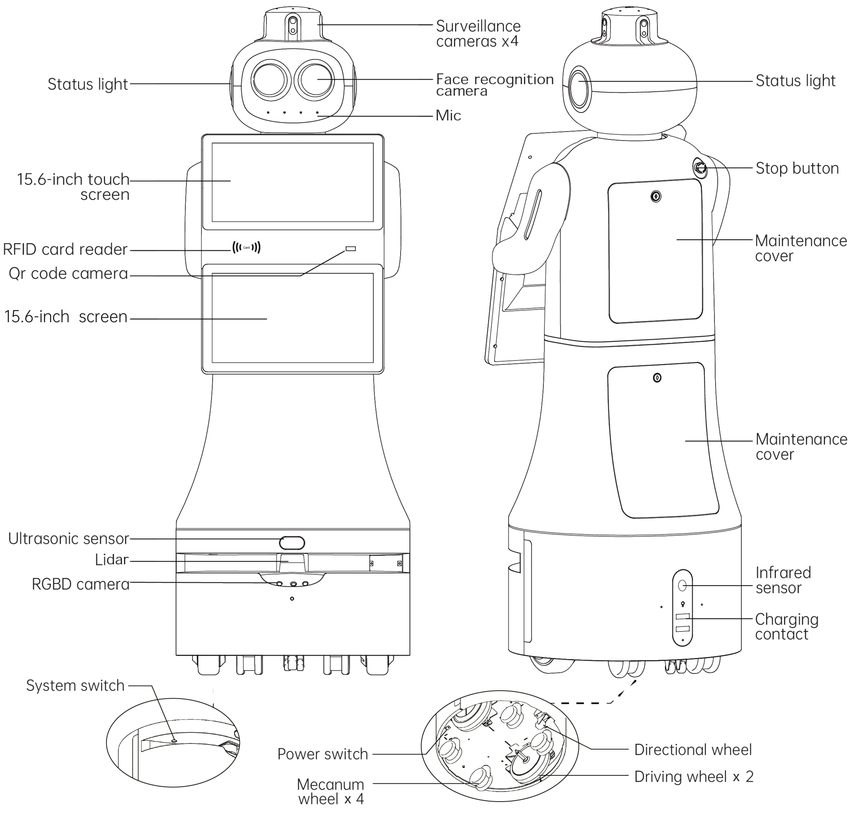

3. Product Parameters

Basic parameters	Overall dimension	500mm×500mm×1440mm
	Package dimension	620mm×620mm×1645mm
	Net weight	61 kg
	Gross weight	72 kg
	Operating system	Android 7.1
	Touchscreen	15.6-inch;resolution:1920×1080
	CPU	RK3399
	RAM	2GB
	ROM	16GB
	Network	4G/WIFI
	Battery capacity	24V，20Ah
	Working hours	8h
	Charging time	4.5h
	Standby time	9.5h
Environment	Operating environment	Temperature: 5℃~45℃; humidity: 5%~85%
	Storage environment	Temperature: -10℃~60℃; humidity: 5%~85%
Chassis parameters	Mapped area	≤10000m²
	Movement speed	0~0.8m/s (user-defined)
	Width of driving passage	≥800mm
	Sensor	Single-line laser, RGBD TOF camera (optional), ultra-sonic, 6-axis gyroscope
	Width of surmountable trench	≤40mm
	Climbability	≤5°
	Height of surmountable obstacle	≤10mm
	Minimum turning radius	0
	Maximum rotational speed	60°/s
	Positioning accuracy	±5cm
	Wheels	2 differential wheels + 4 mecanum wheels
Parameters of charging piles	Charging mode	Automatic recharging by contact
	Input	AC110-240V
	Output	29.4V，6A
Other parameters	MIC	Linear four-microphone array pickup,The effective pick-up distance is within 3 meters
	Loudspeaker	2
	Face recognition camera	2M pixels, effective recognition distance 0.5m~3m, recognition rate >99%, recognition time < 1 s
	Surveillance cameras	4, 2 million pixels, HD ICR infrared night vision
	RFID card reader (optional)	The response speed of identification card reading < 1s, and the reading distance is 0~30mm
	QR code scanner (optional)	Support one-dimensional, two-dimensional code, the best reading distance is 100mm~150mm