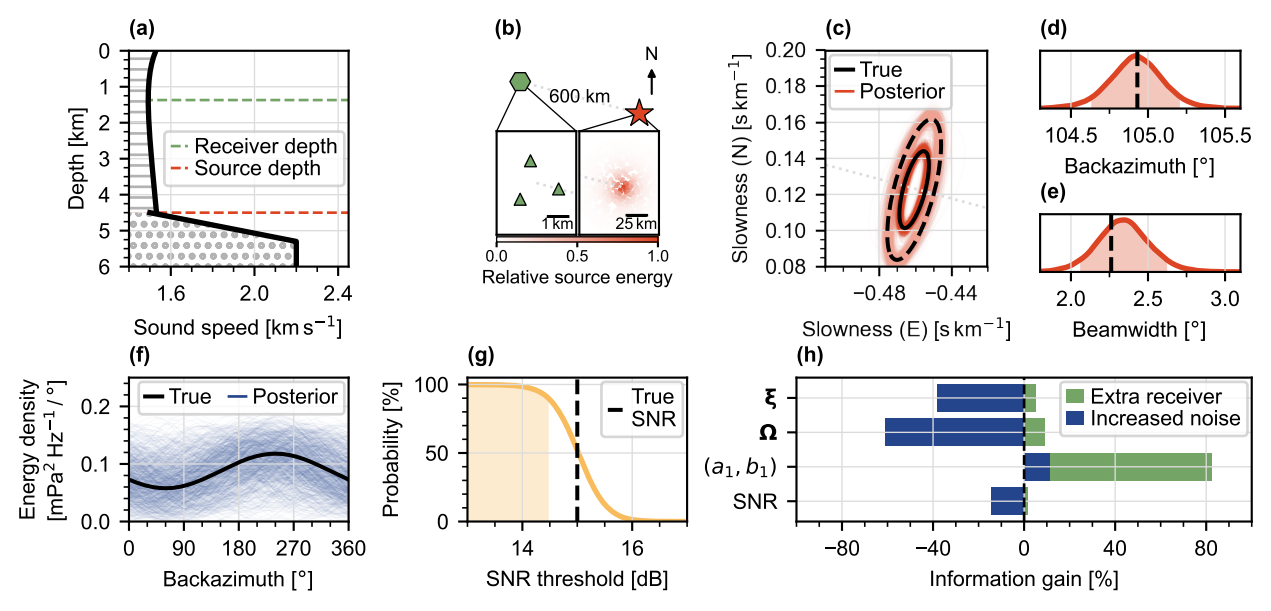

(a)
Depth [km]
Receiver depth
Source depth
Sound speed [km s$^{-1}$]
(b)
N
600 km
1 km
25 km
Relative source energy
(c)
True
Posterior
Slowness (N) [s km$^{-1}$]
Slowness (E) [s km$^{-1}$]
(d)
Backazimuth [°]
(e)
Beamwidth [°]
(f)
Energy density [mPa$^2$ Hz$^{-1}$ / °]
Backazimuth [°]
(g)
Probability [%]
True SNR
SNR threshold [dB]
(h)
Extra receiver
Increased noise
$\xi$
$\Omega$
$(a_1, b_1)$
SNR
Information gain [%]